











<b>TEST REPORT</b> <b>IEC 60335-1</b> <b>Safety of household and similar electrical appliances</b>	
Report Number..... :	GZES231101990701
Date of issue..... :	2023-12-07
Total number of pages..... :	93
Name of Testing Laboratory preparing the Report..... :	SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch
Applicant's name..... :	Shanghai G-STAR Sports Co., Ltd.
Address..... :	No. 53, Tongming Road, TongAn, Xiamen, Fujian, China
<b>Test specification:</b>	
Standard..... :	IEC 60335-1:2010/COR1:2010/COR2:2010 /AMD1:2013/COR1:2014/AMD2:2016/COR1:2016
Test procedure..... :	SGS-CSTC
Non-standard test method..... :	N/A
Test Report Form No..... :	IEC60335_1X
Test Report Form(s) Originator.... :	Nemko AS
Master TRF..... :	Dated 2016-10
<b>Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. <b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	



<b>Test item description</b> .....	Stair Trainer	
<b>Trade Mark</b> .....	<b>KPOWER , TAURUS</b>	
<b>Manufacturer</b> .....	Same as applicant	
<b>Model/Type reference</b> .....	K5311A, TF-ST105-T/Taurus Stair Trainer ST10.5 Touch, K5311, TF-ST105/Taurus Stair Trainer ST10.5, K5311B	
<b>Ratings</b> .....	100 V – 240 V; 50 Hz / 60 Hz; 50 W	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch
<b>Testing location/ address</b> .....		Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China
<b>Tested by (name, function, signature)</b> .....		Holon Li / Project Engineer 
<b>Approved by (name, function, signature) ..</b>		Clause Wang / Reviewer 
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
<b>Testing location/ address</b> .....		
<b>Tested by (name, function, signature)</b> .....		
<b>Approved by (name, function, signature) ..</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
<b>Testing location/ address</b> .....		
<b>Tested by (name + signature)</b> .....		
<b>Witnessed by (name, function, signature) . :</b>		
<b>Approved by (name, function, signature) .. :</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
<b>Testing location/ address</b> .....		
<b>Tested by (name, function, signature)</b> .....		
<b>Witnessed by (name, function, signature) . :</b>		
<b>Approved by (name, function, signature) .. :</b>		
<b>Supervised by (name, function, signature) :</b>		

<p><b>List of Attachments (including a total number of pages in each attachment):</b>                  Attachment 1: 27 pages of circuit diagram;                  Attachment 2: 13 pages of photo document;                  Attachment 3: 14 pages of EU deviation;                  Attachment 4: 21 pages of IEC 61558-2-16 Annex BB</p>																																																																																																																													
<p><b>Summary of testing:</b></p>																																																																																																																													
<p><b>Tests performed (name of test and test clause):</b>                  The tests were carried out according to the following standards:                  IEC 60335-1: 2010 + A1: 2013+ A2: 2016                  After reviewing, full tests were carried out on model K5311A.                  Tests of clause 10, 11, 13 and 30 were carried out on alternative electromagnetic brake on model K5311A.                  Tests of clause 10, 11 were carried out on alternative control panel on model K5311.                  The submitted samples were in compliance with above standards.</p>	<p><b>Testing location:</b>                  SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch                  Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China                  Clause 19.11.4 was subcontracted to SGS-CSTC Guangzhou CBTL:                  SGS-CSTC Standards Technical Service Co., Ltd. Guangzhou Branch.                  198 Kezhu Road, Science City, Economic &amp; Technology Development Area, Guangzhou, Guangdong, China</p>																																																																																																																												
<p><b>Summary of compliance with National Differences (List of countries addressed):</b>                  EU national differences were under considered.  <b>The product fulfils the requirements of:</b>                  EN 60335-1: 2012 + A11: 2014 + A13: 2017 + A1: 2019 + A14: 2019 + A2: 2019 + A15: 2021                  EN 62233: 2008</p>																																																																																																																													
<p><b>Copy of marking plate:</b>                  The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.</p>																																																																																																																													
<p>For model: K5311A</p> <table border="1"> <tr> <td rowspan="10">  </td> <td>Product Name</td> <td>Stair Trainer</td> <td>Trademark</td> <td colspan="2">KPOWER</td> </tr> <tr> <td>Model</td> <td>K5311A</td> <td>Voltage</td> <td>100-240 V</td> <td></td> </tr> <tr> <td>Max. Load</td> <td>180KG</td> <td>Frequency</td> <td>50/60Hz</td> <td></td> </tr> <tr> <td colspan="2">EN ISO 20957-1:2013, EN ISO 20957-8:2017</td> <td>Power</td> <td>50W</td> <td></td> </tr> <tr> <td colspan="2"></td> <td>Class</td> <td>SC</td> <td></td> </tr> <tr> <td>Manufacturer</td> <td colspan="4">Xiamen K-power Sports Co., Ltd</td> </tr> <tr> <td>Address</td> <td colspan="4">No.53 Tongming Road, Tongan Dist., Xiamen, China 361100</td> </tr> <tr> <td colspan="6">Manufacturing Date</td> </tr> <tr> <td colspan="2"></td> <td>2023</td> <td>2024</td> <td colspan="2">2025</td> </tr> <tr> <td colspan="2"></td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td>10</td> <td>11</td> <td>12</td> </tr> </table> <p>NO MEDICAL TREATMENT PURPOSE! Made in China</p> <p><b>WARNING</b> – Risk of personal injury – Keep children under the age of 13 away from machine.</p>		Product Name	Stair Trainer	Trademark	KPOWER		Model	K5311A	Voltage	100-240 V		Max. Load	180KG	Frequency	50/60Hz		EN ISO 20957-1:2013, EN ISO 20957-8:2017		Power	50W				Class	SC		Manufacturer	Xiamen K-power Sports Co., Ltd				Address	No.53 Tongming Road, Tongan Dist., Xiamen, China 361100				Manufacturing Date								2023	2024	2025				1	2	3	4	5	6	7	8	9	10	11	12	<p>For model: TF-ST105-T/Taurus Stair Trainer ST10.5 Touch</p> <table border="1"> <tr> <td rowspan="10">  </td> <td>Product Name</td> <td>Stair Trainer</td> <td>Trademark</td> <td colspan="2">TAURUS</td> </tr> <tr> <td>Model</td> <td>TF-ST105-T/Taurus Stair Trainer ST10.5 Touch</td> <td>Voltage</td> <td>100-240 V</td> <td></td> </tr> <tr> <td>Max. Load</td> <td>180KG</td> <td>Frequency</td> <td>50/60Hz</td> <td></td> </tr> <tr> <td colspan="2">EN ISO 20957-1:2013, EN ISO 20957-8:2017</td> <td>Power</td> <td>50W</td> <td></td> </tr> <tr> <td colspan="2"></td> <td>Class</td> <td>SC</td> <td></td> </tr> <tr> <td>Manufacturer</td> <td colspan="4">Xiamen K-power Sports Co., Ltd</td> </tr> <tr> <td>Address</td> <td colspan="4">No.53 Tongming Road, Tongan Dist., Xiamen, China 361100</td> </tr> <tr> <td colspan="6">Manufacturing Date</td> </tr> <tr> <td colspan="2"></td> <td>2023</td> <td>2024</td> <td colspan="2">2025</td> </tr> <tr> <td colspan="2"></td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td>10</td> <td>11</td> <td>12</td> </tr> </table> <p>NO MEDICAL TREATMENT PURPOSE! Made in China</p> <p><b>WARNING</b> – Risk of personal injury – Keep children under the age of 13 away from machine.</p>		Product Name	Stair Trainer	Trademark	TAURUS		Model	TF-ST105-T/Taurus Stair Trainer ST10.5 Touch	Voltage	100-240 V		Max. Load	180KG	Frequency	50/60Hz		EN ISO 20957-1:2013, EN ISO 20957-8:2017		Power	50W				Class	SC		Manufacturer	Xiamen K-power Sports Co., Ltd				Address	No.53 Tongming Road, Tongan Dist., Xiamen, China 361100				Manufacturing Date								2023	2024	2025				1	2	3	4	5	6	7	8	9	10	11	12
		Product Name	Stair Trainer	Trademark	KPOWER																																																																																																																								
		Model	K5311A	Voltage	100-240 V																																																																																																																								
		Max. Load	180KG	Frequency	50/60Hz																																																																																																																								
		EN ISO 20957-1:2013, EN ISO 20957-8:2017		Power	50W																																																																																																																								
				Class	SC																																																																																																																								
		Manufacturer	Xiamen K-power Sports Co., Ltd																																																																																																																										
		Address	No.53 Tongming Road, Tongan Dist., Xiamen, China 361100																																																																																																																										
		Manufacturing Date																																																																																																																											
				2023	2024	2025																																																																																																																							
			1	2	3	4	5	6	7	8	9	10	11	12																																																																																																															
	Product Name	Stair Trainer	Trademark	TAURUS																																																																																																																									
	Model	TF-ST105-T/Taurus Stair Trainer ST10.5 Touch	Voltage	100-240 V																																																																																																																									
	Max. Load	180KG	Frequency	50/60Hz																																																																																																																									
	EN ISO 20957-1:2013, EN ISO 20957-8:2017		Power	50W																																																																																																																									
			Class	SC																																																																																																																									
	Manufacturer	Xiamen K-power Sports Co., Ltd																																																																																																																											
	Address	No.53 Tongming Road, Tongan Dist., Xiamen, China 361100																																																																																																																											
	Manufacturing Date																																																																																																																												
			2023	2024	2025																																																																																																																								
			1	2	3	4	5	6	7	8	9	10	11	12																																																																																																															
<p>Location: the plate is affixed on the rear of the unit.</p>																																																																																																																													
<p><b>Remark:</b>                  Label of K5311, K5311B are same as K5311A except model no.                  Label of TF-ST105/Taurus Stair Trainer ST10.5 are same as TF-ST105-T/Taurus Stair Trainer ST10.5 Touch except model no.</p>																																																																																																																													

<p>The Height of CE logo shall not be less than 5 mm; Height of WEEE logo shall not be less than 7 mm.                  As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.                  Marking on the packaging or in a document accompanying the electrical equipment is only acceptable if it is not possible to place such markings on the product.</p>	
<p><b>Test item particulars..... :</b></p>	
<p><b>Classification of installation and use ..... :</b> Stationary appliance</p>	
<p><b>Supply Connection ..... :</b> Inlet</p>	
<p><b>Possible test case verdicts:</b></p> <p>- test case does not apply to the test object ..... : N/A</p> <p>- test object does meet the requirement..... : P (Pass)</p> <p>- test object does not meet the requirement ..... : F (Fail)</p>	
<p><b>Testing ..... :</b></p> <p><b>Date of receipt of test item ..... :</b> 2023-11-09</p> <p><b>Date (s) of performance of tests..... :</b> 2023-11-09 to 2023-12-04</p>	
<p><b>General remarks:</b></p> <p>"(See Enclosure #)" refers to additional information appended to the report.                  "(See appended table)" refers to a table appended to the report.</p> <p><b>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</b>                  This document is issued by the Company subject to its General Conditions of Service,available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.</p> <p>Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.</p> <p>Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.</p>	
<p><b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60335-1:</b></p>	
<p>The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....</p>	<p><input type="checkbox"/> Yes</p> <p><input checked="" type="checkbox"/> Not applicable</p>
<p><b>When differences exist; they shall be identified in the General product information section.</b></p>	





**Name and address of factory (ies) .....** : Xiamen K-power Sports Co., Ltd.  
No. 1333, Tonghui Nan Road, TongAn, Xiamen,  
Fujian, China

**General product information:**

Stair Trainer for indoor use. It contains main power board, display panel, control panel, electromagnetic brake and etc.

Model difference part see the table below for detail:

Model	Trademarks	Control panel
K5311A	<b>KPOWER</b>	
TF-ST105-T/Taurus Stair Trainer ST10.5 Touch	<b>TAURUS</b>	
K5311, K5311B	<b>KPOWER</b>	
TF-ST105/Taurus Stair Trainer ST10.5	<b>TAURUS</b>	

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>GENERAL CONDITIONS FOR THE TESTS</b>		—
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
<b>6</b>	<b>CLASSIFICATION</b>		—
6.1	Protection against electric shock: Class 0, 0I, I, II, III .....	Class I	P
	For a class III construction with a detachable power supply part the appliance is classified according to the detachable power supply part		N/A
6.2	Protection against harmful ingress of water		P
<b>7</b>	<b>MARKING AND INSTRUCTIONS</b>		—
7.1	Rated voltage or voltage range (V) .....	100 V – 240 V	P
	Symbol for nature of supply, or .....		N/A
	Rated frequency (Hz) .....	50 Hz / 60 Hz	P
	Rated power input (W), or .....	50 W	P
	Rated current (A) .....		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark.....	<b>KPOWER TAURUS</b>	P
	Model or type reference.....	K5311A, TF-ST105-T/Taurus Stair Trainer ST10.5 Touch, K5311, TF-ST105/Taurus Stair Trainer ST10.5, K5311B	P
	Symbol IEC 60417-5172, for class II appliances		N/A
	IP number, other than IPX0 .....		N/A
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only, or		N/A
	for appliances powered by rechargeable batteries recharged in the appliance		N/A
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
7.2	Warning for stationary appliances for multiple supply		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P
	Different rated values marked with the values separated by an oblique stroke		P
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage or rated frequency to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		P
	the power input or current are related to the arithmetic mean value of the rated voltage range		N/A
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		P
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		N/A
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A
	correct mode of connection is obvious		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		—
	- marking of terminals exclusively for the neutral conductor (letter N)		N/A
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking of functional earthing terminals (symbol IEC 60417-5018)		N/A
	- marking not placed on removable parts		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means.....: :	by figures	P
	This applies also to switches which are part of a control		P
	If figures are used, the off position indicated by the figure 0		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	The instructions state that:		—
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	For appliances for altitudes exceeding 2000 m, the maximum altitude is stated .....: :		N/A
	The instructions for appliances incorporating a functional earth states that the appliance incorporates an earth connection for functional purposes only		N/A
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		—
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		N/A
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		—
	- max. inlet water pressure (Pa).....: .....		N/A
	- min. inlet water pressure, if necessary (Pa) .....		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.12.9	Instructions specified in 7.12 and from 7.12.1 to 7.12.8 appear together before any other instructions supplied with the appliance		P
	These instructions may be supplied with the appliance separately from any functional use booklet		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches		P
	In addition, instructions are also available in an alternative format such as on a website or on request from the user in a format such as a DVD		P
	In addition, instructions are also available in an alternative format such as on a website or in a format such as a DVD	on a website	P
7.13	Instructions and other texts in an official language	English	P
7.14	Markings clearly legible and durable:		—
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified .....		N/A
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm .....		N/A
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		N/A
	contrasting colours are used		N/A
	Markings checked by inspection, measurement and rubbing test as specified		P
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		P
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N/A
<b>8</b>	<b>PROTECTION AGAINST ACCESS TO LIVE PARTS</b>		—
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Use of test probe B of IEC 61032 through openings, with a force of 20N: no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements or supporting parts		N/A
	For a single switching action obtained by a switching device, requirements as specified		N/A
	For appliances with a supply cord and without a switching device, the single switching action may be obtained by the withdrawal of the plug		N/A
8.1.4	Accessible part not considered live if:		—
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V		N/A

<b>IEC 60335-1</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- safety extra-low d.c. voltage: not exceeding 42.4 V	12,0 V	P
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0.7 mA		N/A
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 $\mu$ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		—
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
<b>9</b>	<b>STARTING OF MOTOR-OPERATED APPLIANCES</b>		—
	Requirements and tests are specified in part 2 when necessary		N/A
<b>10</b>	<b>POWER INPUT AND CURRENT</b>		—
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1 .:	(see appended table)	P
	If the power input varies throughout the operating cycle and the maximum value of the power input exceeds, by a factor greater than two, the arithmetic mean value of the power input occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period		N/A
	Otherwise the power input is the arithmetic mean value		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		P
	the rated power input is related to the arithmetic mean value		N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2 .....		N/A
	If the current varies throughout the operating cycle and the maximum value of the current exceeds, by a factor greater than two, the arithmetic mean value of the current occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period		N/A
	Otherwise the current is the arithmetic mean value		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		N/A
<b>11</b>	<b>HEATING</b>		—
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described .....	placed on a floor	P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings are non-uniform or it is difficult to make the necessary connections	Transformer, Electromagnetic brake	P
11.4	Heating appliances operated under normal operation at 1.15 times rated power input (W) .....		N/A
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) .....	240 V x 1,06 = 254,4 V 100 V x 0,94 = 94,0 V	P
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) .....		N/A
11.7	Operation duration corresponding to the most unfavourable conditions of normal use		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
11.8	Temperature rises monitored continuously and not exceeding the values in table 3 .....	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
<b>13</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE</b>		—
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times the rated power input (W).....		N/A
	Motor-operated appliances and combined appliances supplied at 1.06 times the rated voltage (V).....	240 V x 1,06 = 254,4 V	P
	Protective impedance and radio interference filters disconnected before carrying out the tests		P
13.2	The leakage current is measured by means of the circuit described in Figure 4 of IEC 60990:1999		P
	For class 0I appliances and class I appliances, except parts of class II construction, C may be replaced by a low impedance ammeter		P
	Leakage current measurements .....	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4.....	(see appended table)	P
	No breakdown during the tests		P
<b>14</b>	<b>TRANSIENT OVERVOLTAGES</b>		—
	Appliances withstand the transient over-voltages to which they may be subjected		N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6.....		N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>15</b>	<b>MOISTURE RESISTANCE</b>		—
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		N/A
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529 .....		N/A
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N/A
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Detachable parts subjected to the relevant treatment with the main part		N/A
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		N/A
	Spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent		N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
	Detachable parts are removed		N/A
	Overfilling test with additional amount of the solution, over a period of 1 min (I).....:		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet	25°C, 93%RH	P
	Reassembly of those parts that may have been removed		NA
	The appliance withstands the tests of clause 16		P
<b>16</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH</b>		—
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P



<b>IEC 60335-1</b>			
Clause	Requirement + Test	Result - Remark	Verdict
16.2	Single-phase appliances: test voltage 1.06 times rated voltage (V).....:	240 V x 1,06 = 254,4 V	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V) .....		N/A
	Leakage current measurements .....	(see appended table)	P
	Limit values doubled if:		—
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified .....	(see appended table)	P
16.3	Electric strength tests according to table 7.....:	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified.....:		N/A
	No breakdown during the tests		P
<b>17</b>	<b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>		—
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use.....:	(see appended table)	P
	Appliance supplied with 1.06 or 0.94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V) .....	240 V x 1,06 = 254,4 V	P
	Basic insulation is not short-circuited		P
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		P
	Temperature of the winding not exceeding the value specified in table 8		P
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
<b>18</b>	<b>ENDURANCE</b>		—
	Requirements and tests are specified in part 2 when necessary		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>19</b>	<b>ABNORMAL OPERATION</b>		—
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe .....	(see appended table)	P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		N/A
	if the appliance also has a control that limit the temperature during clause 11 it is subjected to the test of 19.4, and		N/A
	if applicable, to the test of 19.5		N/A
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		N/A
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		N/A
	until steady conditions are established		P
	If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample		N/A
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0.85 times rated power input (W) .....		N/A
19.3	Test of 19.2 repeated; test voltage (V), power input of 1.24 times rated power input (W) .....		N/A
19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short-circuited		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath		N/A
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures (V).....:		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or		N/A
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	the capacitor is of class S2 or S3 of IEC 60252-1		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed.....:		N/A
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N/A
	Other appliances supplied with rated voltage for a period as specified .....		N/A
	Winding temperatures not exceeding values specified in table 8 .....		N/A
19.8	Multi-phase motors operated at rated voltage with one phase disconnected		N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A
	Winding temperatures not exceeding values as specified.....:		N/A
19.10	Series motor operated at 1.3 times rated voltage for 1 min (V) .....		N/A
	During the test, parts not being ejected from the appliance		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		P
	they comply with the conditions specified in 19.11.1		P
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		P
	restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		P
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		P
	During and after each test the following is checked:		—
	- the temperature of the windings do not exceed the values specified in table 8		P
	- the appliance complies with the conditions specified in 19.13		P
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		—
	- the base material of the printed circuit board withstands the test of Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		—
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified	After EC7: 1,3 W	P
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		P
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		—
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		N/A
	b) open circuit at the terminals of any component		P
	c) short circuit of capacitors, unless	EC8 short, fuse broke; EC1 short, unit not work; EC3 short, unit not work; EC4 short, unit not work; EC2 short, unit not work; EC5 short, unit not work; EC6 short, unit not work	P
	they comply with IEC 60384-14		N/A
	d) short circuit of any two terminals of an electronic component, other than integrated circuits	DB1 pin3-pin1 short, fuse broke; DB1 pin2-pin4 short, fuse broke; T1 pin10-pin7 short, unit not work; T1 pin11-pin8 short, unit not work; T1 pin12-pin9 short, unit not work; D5, D4, D8, D7, D12, D13, D14, D2 short, unit not work	P
	This fault condition is not applied between the two circuits of an optocoupler		P
	e) failure of triacs in the diode mode		N/A
	f) failure of microprocessors and integrated circuits	U9 pin2-pin1 short, not work; U9 pin3-pin4 short, not work; U1 pin2-pin1 short, not work; U1 pin3-pin4 short, not work; U5 pin6-pin4 short, not work	P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	g) failure of an electronic power switching device	Q10 pin D/S short, unit not work	P
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		P
19.11.3	If the appliance incorporates a protective electronic circuit that operates to ensure compliance with clause 19, the appliance is tested as specified		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		P
	a device that can be placed in the stand-by mode,		P
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		P
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		P
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		N/A
	Surge protective devices disconnected, unless		P
	They incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		P
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, at frequency ranges specified		P
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		P
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		P
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		P
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling		P
	Earthed heating elements in class I appliances disconnected		N/A



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		P
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		P
	Appliances having a rated current exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-34		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		P
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		P
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		P
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A) .....	Rated current: 5 A; Measured: 15,1 A	P
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9 .....	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		P
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in table 4:		—
	- basic insulation (V) .....	(see appended table)	P
	- supplementary insulation (V) .....	(see appended table)	P
	- reinforced insulation (V) .....	(see appended table)	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		—
	- do not become operational, or		P
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		—
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
<b>20</b>	<b>STABILITY AND MECHANICAL HAZARDS</b>		—
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A

<b>IEC 60335-1</b>			
Clause	Requirement + Test	Result - Remark	Verdict
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probe described		P
<b>21</b>	<b>MECHANICAL STRENGTH</b>		—
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(see appended table)	P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
<b>22</b>	<b>CONSTRUCTION</b>		—
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		N/A
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		—
	- a supply cord fitted with a plug, or		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- a switch complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		P
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0.25 Nm		N/A
	Pull force of 50N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N/A
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		P
22.5	No risk of electric shock when touching pins, for appliances having a capacitor with rated capacitance equal to or greater than 0,1 $\mu$ F, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V) .....	24,1 V	P
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N/A
	The discharge test is then repeated three times, voltage not exceeding 34 V (V).....		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of Class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N/A
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner, if loosening result in a hazard		P
	Removing or fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible, if resulting in a hazard		P
	A choking hazard does not apply to appliances for commercial use		N/A
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		P
	If the part is removed and can be contained within the small parts cylinder, it is considered to be a choking hazard		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		P
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible		N/A
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos		P



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N/A
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		P
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		N/A
	unearthed metal parts separated from live parts by basic insulation only		N/A
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		P
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		P
	they are separated from live parts by double or reinforced insulation		P
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		N/A
22.39	Lamp holders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		—
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts		N/A
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless		N/A
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously		N/A
22.55	Devices operated to stop the intended function of the appliance, if any, are distinguished from other manual devices by means of shape, size, surface texture or position	By position	P
	The requirement concerning position does not preclude use of a push on push off switch		N/A
	An indication when the device has been operated is given by:		—
	– tactile feedback from the actuator or from the appliance, or		P
	– reduction in heat output; or		N/A
	– audible and visible feedback		P
22.56	Detachable power supply part provided with the part of class III construction		N/A
22.57	The properties of non-metallic materials do not degrade from exposure to UV-C radiation, as specified in Annex T		N/A
	This requirement does not apply to glass, ceramics or similar materials		N/A
<b>23</b>	<b>INTERNAL WIRING</b>		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N/A
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		N/A
	Not more than 10% of the strands of any conductor broken, and		N/A
	not more than 30% for wiring supplying circuits that consume no more than 15W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		N/A
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	For class II construction, the requirements for supplementary insulation and reinforced insulation apply,		N/A
	except that the sheath of a cord complying with IEC 60227 or IEC 60245 may provide supplementary insulation.		N/A
	A single layer of internal wiring insulation does not provide reinforced insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		P
	be such that it can only be removed by breaking or cutting		N/A
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A
<b>24</b>	<b>COMPONENTS</b>		—
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components .....	(see appended table)	P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		N/A
	Relays tested as part of the appliance, or		N/A
	alternatively acc. to IEC 60730-1, and meeting the additional requirements in IEC 60335-1		N/A
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided the specified conditions are met		P
	If these conditions are not satisfied, the component is tested as part of the appliance.		P
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N/A
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N/A
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, comply with IEC 60384-14		P
	If the capacitors have to be tested, they are tested according to Annex F		N/A



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16	See attachment: IEC 61558-2-16 Annex BB	P
	Safety isolating transformers comply with IEC 61558-2-6		N/A
	If they have to be tested, they are tested according to Annex G		N/A
24.1.3	Switches comply with IEC 61058-1, the number of cycles of operation being at least 10 000		P
	If they have to be tested, they are tested according to Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls comply with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		—
	- thermostats:	10 000	N/A
	- temperature limiters:	1 000	N/A
	- self-resetting thermal cut-outs:	300	N/A
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A
	- timers:	3 000	N/A
	- energy regulators:	10 000	N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
	Thermal cut-outs of the capillary type comply with the requirements for type 2.K controls in IEC 60730-2-9		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.5	Appliance couplers comply with IEC 60320-1		P
	However, for class II appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3		N/A
	Interconnection couplers comply with IEC 60320-2-2		N/A
24.1.6	Small lamp holders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	The relevant standard for thermal links is IEC 60691		N/A
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance .....		N/A
24.2	Appliances not fitted with:		—
	- switches, automatic controls or power supplies in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly		N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of Annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		—
	- the capacitors are of class S2 or S3 according to IEC 60252-1		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
<b>25</b>	<b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS</b>		—
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		—
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		P
	- pins for insertion into socket-outlets		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		—
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm).....:		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		—
	- type X attachment		N/A
	- type Y attachment		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		—
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		—
	<ul style="list-style-type: none"> <li>light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances</li> </ul>		P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		—
	<ul style="list-style-type: none"> <li>heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances</li> </ul>		N/A
	- halogen-free, low smoke, thermoplastic insulated and sheathed		—
	<ul style="list-style-type: none"> <li>light duty halogen-free low smoke flexible cable (62821 IEC 101) for circular cable and (62821 IEC 101f) for flat cable</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Ordinary duty halogen-free low smoke flexible cable (62821 IEC 102) for circular cable and (62821 IEC 102f) for flat cable</li> </ul>		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm <sup>2</sup> ) .....	Max. current: 0,71 A; cross-sectional area: 0,75 mm <sup>2</sup>	P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue		N/A
	Where additional neutral conductors are provided in the supply cord:		—
	– other colours may be used for these additional neutral conductors;		N/A
	– all of the neutral conductors and line conductors are identified by marking using the alpha numeric notation specified in IEC 60445		N/A
	– the supply cord is fitted to the appliance		N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		N/A
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		N/A
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		N/A
	Flexing test, as described:		—
	- applied force (N) .....		N/A
	- number of flexings.....		N/A
	The test does not result in:		—
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10% of the strands of any conductor		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		N/A
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N/A
	Pull and torque test of supply cord:		—
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm).....:		N/A
	- other appliances: values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm) .....		N/A
	Cord not damaged and max. 2 mm displacement of the cord		N/A
25.16	Cord anchorages for type X attachments constructed and located so that:		—
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		N/A
25.18	Cord anchorages only accessible with the aid of a tool, or		N/A
	Constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		N/A
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		—
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		—



<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		P
	- connector can be inserted without difficulty		P
	- the appliance is not supported by the connector		P
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		—
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		N/A
	- the thickness of the insulation may be reduced		N/A
	- for class I or class II appliance with class III construction, the cross sectional areas of the conductors need not comply with 25.8 if specified conditions are met		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A
<b>26</b>	<b>TERMINALS FOR EXTERNAL CONDUCTORS</b>		—
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
26.2	Appliances with type X attachment and appliances for the connection of cables of fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		—
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm) .....		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A

<b>IEC 60335-1</b>			
Clause	Requirement + Test	Result - Remark	Verdict
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> ) .....		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N/A
	conductors ends fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		N/A
	For Class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
<b>27</b>	<b>PROVISION FOR EARTHING</b>		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
27.1	Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for protective earthing		N/A
	Class II appliances and class III appliances can incorporate an earth for functional purposes		N/A
	Safety extra-low voltage circuits not earthed, unless		P
	protective extra-low voltage circuits		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm <sup>2</sup> , and		N/A
	- do not provide earthing continuity between different parts of the appliance, and		N/A
	- conductors cannot be loosened without the aid of a tool		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
	Resistance not exceeding 0,1 $\Omega$ at the specified low-resistance test ( $\Omega$ ).....:	0,032 $\Omega$	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
<b>28</b>	<b>SCREWS AND CONNECTIONS</b>		—
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14.....:	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		—
	<ul style="list-style-type: none"> <li>30.2.2 is applicable and that carry a current not exceeding 0,5 A</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>30.2.3 is applicable and that carry a current not exceeding 0,2 A</li> </ul>		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		—
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
<b>29</b>	<b>CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION</b>		—
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), Annex J applies .....		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless .....	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		P
	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 is increased according to the relevant multiplier values in Table A.2 of IEC 60664-1		N/A
	Impulse voltage test is not applicable:		—
	- when the microenvironment is pollution degree 3, or		N/A
	- for basic insulation of class 0 and class 01 appliances, or		N/A
	- to appliances intended for use at altitudes exceeding 2 000 m		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable.....:	(see appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16:	(see appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage.....:	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		P
29.1.4	Clearances for functional insulation are the largest values determined from:		—
	- table 16 based on the rated impulse voltage.....:	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz	Switching power supply on main PCB	P



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		N/A
	the distances can be affected by wear, distortion, movement of the parts or during assembly		P
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		P
	However, clearances at crossover points are not measured		P
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		—
	- table 16 based on the rated impulse voltage.....:		N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		N/A
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree .....	(see appended table)	P
	Pollution degree 2 applies, unless		P
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
29.2.1	Creepage distances of basic insulation not less than specified in table 17 .....	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17 .....		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14 .....		N/A
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or .....	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or .....	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18 .....	(see appended table)	P

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18 .....		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		—
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		P
	- for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		P
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation have a thickness of at least 1 mm	Plastic enclosure: 2,3 mm	P
	Reinforced insulation have a thickness of at least 2 mm		N/A
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		P
	Supplementary insulation consist of at least 2 layers		N/A
	Reinforced insulation consist of at least 3 layers	3 layers insulation tape for transformer	P
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		P
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19.....:		N/A
<b>30</b>	<b>RESISTANCE TO HEAT AND FIRE</b>		—
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C) .....	(see appended table 30.1)	P
	Parts supporting live parts tested at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C).....:	(see appended table 30.1)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C).....:		N/A
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		—
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		P
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		P
	- for unattended appliances, 30.2.3 applies		N/A
	For appliances for remote operation, 30.2.3 applies		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For base material of printed circuit boards, 30.2.4 applies		P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550°C	(see appended table 30.2)	P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and		P
	parts of non-metallic material within a distance of 3mm of such connections,		P
	subjected to the glow-wire test of IEC 60695-2-11 with appropriate severity level:	(see appended table 30.2)	P
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		P
	- 650 °C, for other connections		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		—
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		—
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10.....:		N/A
	Glow-wire test not applicable to conditions as specified.....:		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The tests are not applicable to conditions as specified.....:		N/A
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		N/A
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		N/A
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, and		N/A
	parts of non-metallic material within a distance of 3mm,		N/A
	subjected to the glow-wire test of IEC 60695-2-11 with appropriate severity level:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		—
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	<ul style="list-style-type: none"> <li>• 775 °C, for connections carrying a current exceeding 0,2 A during normal operation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>• 675 °C, for other connections</li> </ul>		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		—
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		—
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of Annex E	(see appended table 30.2/30.2.4)	P
	Test not applicable to conditions as specified .....		N/A
<b>31</b>	<b>RESISTANCE TO RUSTING</b>		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		N/A
<b>32</b>	<b>RADIATION, TOXICITY AND SIMILAR HAZARDS</b>		—
	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		N/A
<b>A</b>	<b>ANNEX A (INFORMATIVE) ROUTINE TESTS</b>		—
	Description of routine tests to be carried out by the manufacturer		N/A
<b>B</b>	<b>ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES THAT ARE RECHARGED IN THE APPLIANCE</b>		—
<b>C</b>	<b>ANNEX C (NORMATIVE) AGEING TEST ON MOTORS</b>		—
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
<b>D</b>	<b>ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS</b>		—
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A
<b>E</b>	<b>ANNEX E (NORMATIVE) NEEDLE-FLAME TEST</b>		—
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		—
<b>7</b>	Severities		—
	The duration of application of the test flame is 30 s ± 1 s		P
<b>9</b>	Test procedure		—
<b>9.1</b>	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1		P
<b>9.2</b>	The first paragraph does not apply		P



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If possible, the flame is applied at least 10 mm from a corner		P
9.3	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		—
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		P
<b>F</b>	<b>ANNEX F (NORMATIVE) CAPACITORS</b>		—
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		—
1.5	Terms and definitions		—
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		—
	Items a) and b) are applicable		N/A
3.4	Approval testing		—
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		—
	This subclause is applicable		N/A
4.2	Electrical tests		—
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		—
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This subclause is applicable		N/A
4.14	Endurance		—
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		—
	This subclause is applicable		N/A
4.18	Active flammability test		—
	This subclause is applicable		N/A
<b>G</b>	<b>ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS</b>		—
	The following modifications to this standard are applicable for safety isolating transformers:		—
7	Marking and instructions		—
7.1	Transformers for specific use marked with:		—
	-name, trademark or identification mark of the manufacturer or responsible vendor .....		N/A
	-model or type reference .....		N/A
17	Overload protection of transformers and associated circuits		—
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		—
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		—
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
<b>H</b>	<b>ANNEX H (NORMATIVE) SWITCHES</b>		—
	Switches comply with the following clauses of IEC 61058-1, as modified below:		—
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		—
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		—
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		—
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		—
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335 .....		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K) .....		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		—
	Clause 20 is applicable to clearances across full disconnection and micro-disconnection		N/A
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 24		N/A
<b>I</b>	<b>ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE</b>		—
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		—
8	Protection against access to live parts		—
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		—
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		—
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		—
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
19.I.101	Appliance operated at rated voltage with each of the following fault conditions:		—
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		—
22.1.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
<b>J</b>	<b>ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS</b>		—
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		—
5.7	Conditioning of the test specimens		—
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		—
	The test is carried out at -25 °C		N/A
5.7.3	Rapid change of temperature		—
	Severity 1 is specified		N/A
5.9	Additional tests		—
	This subclause is not applicable		N/A
<b>K</b>	<b>ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES</b>		—
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
<b>L</b>	<b>ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES</b>		—
	Information for the determination of clearances and creepage distances		P
<b>M</b>	<b>ANNEX M (NORMATIVE) POLLUTION DEGREE</b>		—
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		—
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		N/A
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		—
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		—
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		N/A
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
<b>N</b>	<b>ANNEX N (NORMATIVE) PROOF TRACKING TEST</b>		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		—
7	Test apparatus		—
7.3	Test solutions		—
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		—
10.1	Procedure		—
	The proof voltage is 100V, 175V, 400V or 600V ...:	175 V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A
10.2	Report		—
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
<b>O</b>	<b>ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30</b>		—
	Description of tests for determination of resistance to heat and fire		P
<b>P</b>	<b>ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN TROPICAL CLIMATES</b>		—
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332		—
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332, if liable to be connected to a supply mains that excludes the protective earthing conductor		—
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with symbol IEC 60417-6332		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A

<b>IEC 60335-1</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	The instructions state that the appliance is considered to be suitable for use in countries having a tropical climate, but may also be used in other countries		N/A
	If symbol IEC 60417-6332 is used, its meaning is explained		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
<b>Q</b>	<b>ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS</b>		—
	Description of tests for appliances incorporating electronic circuits		—
<b>R</b>	<b>ANNEX R (NORMATIVE) SOFTWARE EVALUATION</b>		—



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 <sup>e</sup> – GENERAL FAULT/ERROR CONDITIONS						
Component <sup>a</sup>	Fault/error	Acceptable measures <sup>b, c</sup>	Definitions	Document reference for applied measure	Document reference for applied test	Ver-dict
1 CPU						N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: <ul style="list-style-type: none"> <li>- static memory test, or</li> <li>- word protection with single bit redundancy</li> </ul>	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N/A
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory						N/A
4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N/A
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A

IEC 60335-1						
Clause	Requirement + Test			Result - Remark		Verdict
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1  H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						N/A
6.2 VOID						N/A
6.3 Timing	Wrong point in time          Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator  Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3  H.2.18.15 H.2.18.3  H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.1 VOID						N/A

IEC 60335-1						
Clause	Requirement + Test			Result - Remark		Verdict
7.2 Analog I/O						N/A
7.2.1 A/D and D/A- converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specificatio n	Periodic self-test	H.2.16.6			N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.						
a) For fault/error assessment, some components are divided into their sub-functions. b) For each sub-function in the table, the Table R.2 measure will cover the software fault/error. c) Where more than one measure is given for a sub-function, these are alternatives. d) To be divided as necessary by the manufacturer into sub-functions. e) Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.						
<b>S</b>	<b>ANNEX S (NORMATIVE) BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE</b>					—
	The following modifications to this standard are applicable for battery-operated appliances where the batteries are either non-rechargeable (primary batteries), or					N/A
	rechargeable batteries (secondary batteries) that are not recharged in the appliance					N/A
5.8.1	If the supply terminals for the connection of the battery have no indication of polarity, the more unfavourable polarity is applied					N/A
5.S.101	Appliances intended for use with a battery box are tested with the battery box supplied with the appliance or with the battery box recommended in the instructions					N/A
5.S.102	Appliances are tested as motor-operated appliances.					N/A
7.1	Appliances marked with the battery voltage (V) and the polarity of the terminals, unless .....					N/A
	the polarity is irrelevant					N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances also marked with:		—
	– name, trade mark or identification mark of the manufacturer or responsible vendor .....		N/A
	– model or type reference.....		N/A
	– IP number according to degree of protection against ingress of water, other than IPX0 ..		N/A
	– type reference of battery or batteries .....		N/A
	If relevant, the positive terminal is indicated by the symbol IEC 60417-5005 and the negative terminal by the symbol IEC 60417-5006		N/A
	If appliances use more than one battery, they are marked to indicate correct polarity connection of the batteries		N/A
7.6	Additional symbols		N/A
7.12	The instructions contain the following, as applicable:		—
	– the types of batteries that may be used ..		N/A
	– how to remove and insert the batteries		N/A
	– non-rechargeable batteries are not to be recharged		N/A
	– rechargeable batteries are to be removed from the appliance before being charged		N/A
	– different types of batteries or new and used batteries are not to be mixed		N/A
	– batteries are to be inserted with the correct polarity		N/A
	– exhausted batteries are to be removed from the appliance and safely disposed of		N/A
	– if the appliance is to be stored unused for a long period, the batteries are removed		N/A
	– the supply terminals are not to be short-circuited		N/A
11.5	Appliances are supplied with the most unfavourable supply voltage between		—
	– 0,55 and 1,0 times the battery voltage, if the appliance can be used with non-rechargeable batteries		N/A
	– 0,75 and 1,0 times battery voltage, if the appliance is designed for use with rechargeable batteries only		N/A
	The values specified in Table S.101 for the internal resistance per cell of the battery is taken into account		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.1	The tests are carried out with the battery fully charged unless otherwise specified		N/A
19.13	The battery does not rupture or ignite		N/A
19.S.101	Appliances are supplied with the voltage specified in 11.5. The supply terminals having an indication of polarity are connected to the opposite polarity, unless		N/A
	such a connection is unlikely to occur due to the construction of the appliance		N/A
19.S.102	For appliances with provision for multiple batteries, one or more of the batteries are reversed and the appliance is operated, if reversal of batteries is allowed by the construction		N/A
25.5	The flexible leads or flexible cord used to connect an external battery or battery box in is connected to the appliance by a type X attachment		N/A
25.13	This requirement is not applicable to the flexible leads or flexible cord connecting external batteries or a battery box with an appliance		N/A
25.S.101	Appliances have suitable means for connection of the battery. If the type of battery is marked on the appliance, the means of connection is suitable for this type of battery		N/A
26.5	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting an external battery or battery box are so located or shielded that there is no risk of accidental connection between supply terminals		N/A
30.2.3.2	There is no battery in the area of the vertical cylinder used for the consequential needle flame test, unless		N/A
	the battery is shielded by a barrier that meets the needle flame test of Annex E, or		N/A
	that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
<b>T</b>	<b>ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS</b>		—
	Requirements for non-metallic materials subject to direct or reflected UV-C radiation exposure and whose mechanical and electrical properties are relied upon for compliance with the		N/A
	Does not apply to glass, ceramic and similar materials		N/A
	Tested as specified in ISO 4892-1 and ISO 4892-2, with the following modifications:		—

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications to ISO 4892-1:		—
5.1.6	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m <sup>2</sup> at 254 nm		N/A
	Subclause 5.1.6.1 and Table 1 are not applicable		N/A
5.2.4	The black-panel temperature shall be 63 °C +/- 3 °C		N/A
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N/A
9	This clause is not applicable		N/A
	Modifications to ISO 4892-2:		—
7.1	At least three test specimens are tested		N/A
	Ten samples of internal wiring is tested		N/A
7.2	The specimens are attached to the specimen holders such that they are not subject to any stress		N/A
7.3	Apparatus prepared as specified		N/A
	The test specimens and, if used, the irradiance-measuring instrument are exposed for 1 000 h		N/A
7.4	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N/A
7.5	Material properties and test methods for parts providing mechanical support or impact resistance as specified in Table T.1		N/A
	Material properties and test method for electrical insulation of internal wiring as specified in Table T.2		N/A
8	This clause is not applicable		N/A

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	$\Delta P$	Required $\Delta P$	Remark	
100 V; 50 Hz	50,0	42,9	-14,2%	+20%	For model K5311A	
100 V; 60 Hz	50,0	42,9	-14,2%	+20%		
240 V; 50 Hz	50,0	44,3	-11,4%	+20%		
240 V; 60 Hz	50,0	44,3	-11,4%	+20%		
100 V; 50 Hz	50,0	42,8	-14,4%	+20%	For model K5311A with alternative electromagnetic brake	
100 V; 60 Hz	50,0	42,8	-14,4%	+20%		
240 V; 50 Hz	50,0	44,1	-11,8%	+20%		
240 V; 60 Hz	50,0	44,1	-11,8%	+20%		
100 V; 50 Hz	50,0	38,0	-24,0%	+20%	For model K5311	
100 V; 60 Hz	50,0	38,0	-24,0%	+20%		
240 V; 50 Hz	50,0	38,3	-23,4%	+20%		
240 V; 60 Hz	50,0	38,3	-23,4%	+20%		
Supplementary information:						

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	$\Delta I$	Required $\Delta I$	Remark	
—	—	—	—	—	—	
Supplementary information:						

11.8	TABLE: Heating test (For model K5311A)			P
	Test voltage (V) .....	254,4 V / 45,9 W		—
	Ambient (°C) .....	t1= 23,1 t2= 22,8		—
Thermocouple locations:		Max. temperature rise measured, $\Delta T$ (K)	Max. temperature rise limit, $\Delta T$ (K)	
Power cord		0,9	50	
Inlet		1,6	45	
EMI filter surface		3,4	Ref.	
Switch		5,3	T125-25=100	
Fuse holder		2,2	For cl.30.1	
Varistor		12,5	T85-25=60	

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Opto-coupler (U9)		20,8	T110-25=85
Opto-coupler (U1)		12,3	T110-25=85
Coil of Transformer		20,4	65(class105)
Bobbin of transformer		19,0	For cl.30.1
PCB of power board		14,4	120
Coil of electromagnetic brake		14,7	65 (class105)
Bobbin of electromagnetic brake		13,6	For cl.30.1
Internal surface of plastic enclosure		7,8	For cl.30.1
Test floor		1,6	60
Test wall		1,1	60
Control panel		3,1	60
Supplementary information:			

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V) .....		—		—	
	Ambient, t1 (°C) .....		—		—	
	Ambient, t2 (°C) .....		—		—	
Temperature rise of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class	
—	—	—	—	—	—	
Supplementary information:						

11.8	TABLE: Heating test (For model K5311A)			P
	Test voltage (V) .....		94 V / 42,6 W	—
	Ambient (°C) .....		t1= 23,0 t2= 23,3	—
Thermocouple locations:	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)	
Power cord	0,6		50	
Inlet	1,1		45	
EMI filter surface	1,9		Ref.	
Switch	4,8		T125-25=100	
Fuse holder	1,5		For cl.30.1	
Varistor	11,5		T85-25=60	



IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Opto-coupler (U9)		19,1	T110-25=85
Opto-coupler (U1)		10,5	T110-25=85
Coil of Transformer		17,7	65(class105)
Bobbin of transformer		15,9	For cl.30.1
PCB of power board		7,8	120
Coil of electromagnetic brake		14,2	65 (class105)
Bobbin of electromagnetic brake		13,2	For cl.30.1
Internal surface of plastic enclosure		7,3	For cl.30.1
Test floor		1,0	60
Test wall		0,7	60
Control panel		2,9	60
Supplementary information:			

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V) .....		—		—	
	Ambient, t1 (°C) .....		—		—	
	Ambient, t2 (°C) .....		—		—	
Temperature rise of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class	
—	—	—	—	—	—	
Supplementary information:						

11.8	TABLE: Heating test (For model K5311A with alternative electromagnetic brake)			P
	Test voltage (V) .....		254,4 V / 45,7 W	—
	Ambient (°C) .....		t1= 23,0 t2= 23,2	—
Thermocouple locations:	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)	
Power cord	1,0		50	
Inlet	1,2		45	
EMI filter surface	3,0		Ref.	
Switch	4,9		T125-25=100	
Fuse holder	1,8		For cl.30.1	
Varistor	12,4		T85-25=60	

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Opto-coupler (U9)		20,8	T110-25=85
Opto-coupler (U1)		12,2	T110-25=85
Coil of Transformer		20,0	65(class105)
Bobbin of transformer		18,6	For cl.30.1
PCB of power board		14,0	120
Coil of electromagnetic brake		14,3	65 (class105)
Bobbin of electromagnetic brake		13,3	For cl.30.1
Internal surface of plastic enclosure		7,4	For cl.30.1
Test floor		1,2	60
Test wall		0,7	60
Control panel		3,2	60
Supplementary information:			

<b>11.8</b>	<b>TABLE: Heating test, resistance method</b>					N/A
	<b>Test voltage (V) .....</b>		—		—	
	<b>Ambient, t1 (°C) .....</b>		—		—	
	<b>Ambient, t2 (°C) .....</b>		—		—	
<b>Temperature rise of winding:</b>		<b>R1 (Ω)</b>	<b>R2 (Ω)</b>	<b>Δ T (K)</b>	<b>Max. Δ T (K)</b>	<b>Insulation class</b>
—		—	—	—	—	—
Supplementary information:						

<b>11.8</b>	<b>TABLE: Heating test (For model K5311A with alternative electromagnetic brake)</b>					P
	<b>Test voltage (V) .....</b>		94 V / 42,4 W		—	
	<b>Ambient (°C) .....</b>		t1= 23,3 t2= 23,5		—	
<b>Thermocouple locations:</b>			<b>Max. temperature rise measured, Δ T (K)</b>		<b>Max. temperature rise limit, Δ T (K)</b>	
Power cord			0,6		50	
Inlet			0,9		45	
EMI filter surface			1,7		Ref.	
Switch			4,6		T125-25=100	
Fuse holder			1,2		For cl.30.1	
Varistor			11,3		T85-25=60	

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Opto-coupler (U9)		18,9	T110-25=85
Opto-coupler (U1)		10,3	T110-25=85
Coil of Transformer		17,4	65(class105)
Bobbin of transformer		15,6	For cl.30.1
PCB of power board		7,5	120
Coil of electromagnetic brake		14,0	65 (class105)
Bobbin of electromagnetic brake		13,0	For cl.30.1
Internal surface of plastic enclosure		7,1	For cl.30.1
Test floor		0,8	60
Test wall		0,4	60
Control panel		3,0	60
Supplementary information:			

<b>11.8</b>	<b>TABLE: Heating test (For model K5311)</b>		P
	<b>Test voltage (V) .....</b>	254,4 V / 40,2 W	—
	<b>Ambient (°C) .....</b>	t1= 23,0 t2= 23,3	—
<b>Thermocouple locations:</b>		<b>Max. temperature rise measured, <math>\Delta T</math> (K)</b>	<b>Max. temperature rise limit, <math>\Delta T</math> (K)</b>
Power cord		0,8	50
Inlet		1,1	45
EMI filter surface		2,6	Ref.
Switch		4,5	T125-25=100
Fuse holder		1,4	For cl.30.1
Varistor		12	T85-25=60
Opto-coupler (U9)		20,4	T110-25=85
Opto-coupler (U1)		11,8	T110-25=85
Coil of Transformer		19,6	65(class105)
Bobbin of transformer		18,2	For cl.30.1
PCB of power board		13,6	120
Coil of electromagnetic brake		13,9	65 (class105)
Bobbin of electromagnetic brake		12,9	For cl.30.1
Internal surface of plastic enclosure		7,0	For cl.30.1
Test floor		0,8	60

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Test wall		0,3	60
Control panel		2,8	60
Supplementary information:			

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V) .....	—			—	
	Ambient, t1 (°C) .....	—			—	
	Ambient, t2 (°C) .....	—			—	
Temperature rise of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class	
—	—	—	—	—	—	
Supplementary information:						

11.8	TABLE: Heating test (For model K5311)			P
	Test voltage (V) .....	94 V / 37,8 W		—
	Ambient (°C) .....	t1= 23,0 t2= 23,3		—
Thermocouple locations:	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)	
Power cord	0,4		50	
Inlet	0,9		45	
EMI filter surface	1,8		Ref.	
Switch	4,7		T125-25=100	
Fuse holder	1,2		For cl.30.1	
Varistor	11,4		T85-25=60	
Opto-coupler (U9)	19,0		T110-25=85	
Opto-coupler (U1)	10,4		T110-25=85	
Coil of Transformer	17,3		65(class105)	
Bobbin of transformer	15,5		For cl.30.1	
PCB of power board	7,5		120	
Coil of electromagnetic brake	14,1		65 (class105)	
Bobbin of electromagnetic brake	13,1		For cl.30.1	
Internal surface of plastic enclosure	7,2		For cl.30.1	
Test floor	0,9		60	

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
Test wall		0,6	60
Control panel		2,5	60
Supplementary information:			

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V) .....	—			—	
	Ambient, t1 (°C) .....	—			—	
	Ambient, t2 (°C) .....	—			—	
Temperature rise of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class	
—	—	—	—	—	—	
Supplementary information:						

13.2	TABLE: Leakage current			P
	Heating appliances: 1.15 x rated input (W).. :	—		—
	Motor-operated and combined appliances: 1.06 x rated voltage (V)..... :	254,4 V		—
Leakage current between:	I (mA)		Max. allowed I (mA)	
L/N and earth metal	0,112		3,5	
L/N and accessible parts	0,010 peak		0,35 peak	
L/N and accessible parts (with alternative electromagnetic brake)	0,011 peak		0,35 peak	
Supplementary information:				

13.3	TABLE: Dielectric strength		P
Test voltage applied between:	Test potential applied (V)	Breakdown / flashover (Yes/No)	
L/N and earth metal	1000	No	
Internal wire and accessible parts	1750	No	
L/N and accessible parts	3000	No	
L/N and accessible parts (with alternative electromagnetic brake)	3000	No	
Supplementary information:			

IEC 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
—	—	—	—	—	—	
Supplementary information:						

16.2	TABLE: Leakage current			P
	Single phase appliances: 1.06 x rated voltage (V)..... :	254,4 V	—	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ (V)..... :	—	—	—
Leakage current between:		I (mA)	Max. allowed I (mA)	
L/N and earth metal		Max. 0,117	3,5	
L/N and accessible parts		Max. 0,013	0,25	
Supplementary information:				

16.3	TABLE: Dielectric strength			P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)	
L/N and earth metal		1250	No	
Internal wire and accessible parts		1750	No	
L/N and accessible parts		3000	No	
Supplementary information:				

17	TABLE: Overload protection			P
Thermocouple locations:		Max. temperature rise measured, $\Delta T$ (K)	Max. temperature rise limit, $\Delta T$ (K)	
Coil of transformer		59,0	125 (Class 105)	
Supplementary information:				

17	TABLE: Overload protection, resistance method			N/A
	Test voltage (V) .....	—	—	
	Ambient, t1 (°C) .....	—	—	
	Ambient, t2 (°C) .....	—	—	

IEC 60335-1					
Clause	Requirement + Test			Result - Remark	Verdict
Temperature of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class
—	—	—	—	—	—
Supplementary information:					

19	Abnormal operation conditions						P
Operational characteristics			YES/NO	Operational conditions			
Are there electronic circuits to control the appliance operation?			YES	Appliance is operated at rated voltage			
Are there “off” or “stand-by” position?			YES	Appliance is operated at rated voltage			
The unintended operation of the appliance results in dangerous malfunction?			NO	—			
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	—	—	—	—	—	—	N/A
19.3	—	—	—	—	—	—	N/A
19.4	—	—	—	—	—	—	N/A
19.5	—	—	—	—	—	—	N/A
19.6	—	—	—	—	—	—	N/A
19.7	—	—	—	—	—	—	N/A
19.8	—	—	—	—	—	—	N/A
19.9	—	—	—	—	—	—	N/A
19.10	—	—	—	—	—	—	N/A
19.11.2	Component open circuit and short circuit	no hazard	—	—	—	—	Pass
19.11.4.8	Reduce voltage	no hazard	—	—	—	—	Pass
19.10X	—	—	—	—	—	—	N/A
Supplementary information:							

19.7	TABLE: Abnormal operation, locked rotor/moving parts		N/A
	Test voltage (V) .....	—	—
	Ambient, t1 (°C) .....	—	—

IEC 60335-1					
Clause	Requirement + Test	Result - Remark			Verdict
	<b>Ambient, t<sub>2</sub> (°C)</b> .....	—			—
<b>Temperature of winding:</b>	<b>R1 (Ω)</b>	<b>R2 (Ω)</b>	<b>Δ T (K)</b>	<b>Max. Δ T (K)</b>	<b>Insulation class</b>
—	—	—	—	—	—
Supplementary information: See table 19.13/19.7					

19.9	TABLE: Abnormal operation, running overload				N/A
	<b>Test voltage (V)</b> .....	—			—
	<b>Ambient, t<sub>1</sub> (°C)</b> .....	—			—
	<b>Ambient, t<sub>2</sub> (°C)</b> .....	—			—
<b>Temperature of winding:</b>	<b>R1 (Ω)</b>	<b>R2 (Ω)</b>	<b>Δ T (K)</b>	<b>Max. Δ T (K)</b>	<b>Insulation class</b>
—	—	—	—	—	—
Supplementary information:					

19.13/19.7	TABLE: Abnormal operation, locked rotor		N/A
<b>Temperature rise of part/at:</b>	<b>dT (K)</b>	<b>Max. dT (K)</b>	
—	—	—	

21.1	TABLE: Impact resistance			P
<b>Impacts per surface</b>	<b>Surface tested</b>	<b>Impact energy (J)</b>	<b>Comments</b>	
3 blows	Plastic enclosure	0,5	—	
Supplementary information:				

24.1	TABLE: Critical components information					P
<b>Object / part No.</b>	<b>Manufacturer/ trademark</b>	<b>Type / model</b>	<b>Technical data</b>	<b>Standard</b>	<b>Mark(s) of conformity<sup>1)</sup></b>	
Plug	Dongguan E-Jun Wire Co., Ltd.	EL-202	250 VAC; 16 A	VDE 0620-2-1	KEMA-KEUR 4318985.01	
Plug (Alternative)	Ningbo Ousheng Electric Appliance Co., Ltd.	S03	250 VAC; 16 A	VDE 0620-2-1	VDE 40023763	
Plug (Alternative)	Quzhou Zhengbang Electric Appliance Fittings Co.,Ltd	ZB-03D	250 VAC; 16 A	VDE 0620-2-1	VDE 40049030	



IEC 60335-1					
Clause	Requirement + Test			Result - Remark	Verdict
Power Cord	I-Sheng Electric Wire & Cable Co., Ltd.	H05VV-F 60227 IEC 53	3 G 0,75 mm <sup>2</sup> or 3 G 1,0 mm <sup>2</sup>	EN 50525-2-11	VDE 40006070
Power Cord (Alternative)	Ningbo Ousheng Electric Appliance Co., Ltd.	H05VV-F 60227 IEC 53	3 G 0,75 mm <sup>2</sup> or 3 G 1,0 mm <sup>2</sup>	EN 50525-2-11	VDE 40021137
Power Cord (Alternative)	Quzhou Zhengbang Electric Appliance Fittings Co., Ltd.	H05VV-F 60227 IEC 53	3 G 0,75 mm <sup>2</sup> or 3 G 1,0 mm <sup>2</sup>	EN 50525-2-11	VDE 40045977
Connector	Dongguan E-Jun Wire Co., Ltd	EL-701	250 VAC; 10 A; standard sheet C13	EN 60320-1	DEKRA 35-100611
Connector (Alternative)	Ningbo Ousheng Electric Appliance Co., Ltd.	OT3-W	250 VAC; 10 A; standard sheet C13	EN 60320-1	VDE 40025619
Connector (Alternative)	Quzhou Zhengbang Electric Appliance Fittings Co.,Ltd	ZB-03QT	250 VAC; 10 A; standard sheet C13	EN 60320-1	VDE 40049874
Inlet	Zhe Jiang Bei Er Jia Electronic Co., Ltd.	ST-A01	250 VAC; 10 A; C14	EN 60320-1	VDE 40025269
Inlet (Alternative)	LECI Electronics Co., Ltd.	DB-14	250 VAC; 10 A; C14	EN 60320-1	VDE 40032137
Switch	Zhejiang Guanbao Electronic Co., Ltd.	XCK-019	250 V; 16(6) A; T125; 1E4	EN IEC 61058-1	TUV R 50186349
Internal Wire	B&T (ZHANGZHOU) CABLE CO LTD	1015	16 AWG or 18 AWG; 600 V; 105 °C	EN 60335-1	Tested with appliance UL E330484
Internal Wire (Alternative)	Xiamen Runjie Industry and Trade Co Ltd	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E523982
Internal Wire (Alternative)	Xiamen Tianxi Industrial Co., Ltd.	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E507428
Internal Wire (Alternative)	Dongguan Cheng Xing Electronic Co., Ltd.	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E249743
Internal Wire (Alternative)	Changzhou Hong Chang Electronics Co Ltd	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E212395

IEC 60335-1					
Clause	Requirement + Test			Result - Remark	Verdict
Fuse	Sun Electric Co.	5F	250 VAC; 5 A	EN 60127-1 EN 60127-2	TUV J 50306203
Fuse holder	Huizhou Hinev Electric Appliance Co., Ltd.	H3	250 VAC; 10 A	EN 60127-1 EN 60127-6	VDE 40044789
EMI Filter	Jenny Electronics Co., Ltd.	JN4-4A-T(206)	115/250 V; 60/50 Hz; 4A L1: 2x10mH± 30% L2: 4,0mH± 30%	EN 60335-1	Tested with appliance
--CX1	Shanghai Xiang Ri Ya Electronic Co., Ltd.	MKP X2	275 V; 1,0 uF; T100; X2	EN 60384-14	VDE 40001876
--CX2	Shanghai Xiang Ri Ya Electronic Co., Ltd.	MKP X2	275 V; 0,47 uF; T100; X2	EN 60384-14	VDE 40001876
--CY	Jyh Hsu (Jec) Electronics Ltd	JY	250 V; 4700 pF; T85; Y2	EN 60384-14	VDE 40038643
Electromagnetic brake	Xiamen Ruihexin Machinery Co., Ltd.	KLJ-5311	DC 24 V; 3,0 A	EN 60335-1	Tested with appliance
--Bobbin	Xiamen Xinbaosheng Plastic Material Co., Ltd.	PA-17G0465F	V-0; 65 °C		Tested with appliance UL E525592
--Winding	Zhejiang Hongbo Technology Co Ltd	Q(ZY/XY)L-x/220	220 °C		Tested with appliance UL E221719
Electromagnetic brake (Alternative)	Changzhou Mchi Electromechanical Co., Ltd.	KLJ-CZD01	DC 24 V; 3,0 A	EN 60335-1	Tested with appliance
--Bobbin	Chang Chun Plastics Co Ltd	4830	V-0; 130°C		Tested with appliance UL E59481
--Winding	Zhejiang Hongbo Technology Co Ltd	QA-x/155	155 °C		Tested with appliance UL E221719
PCB	Shenzhen Xing Zhi Guang Industrial Development Co., Ltd.	XZG-1	FR-4; V-0; 130 °C	EN 60335-1	Tested with appliance UL E350388
PCB (Alternative)	Wenzhou Ruihao Electronics Co., Ltd.	RH-D	FR-4; V-0; 130 °C		Tested with appliance UL E339059

IEC 60335-1					
Clause	Requirement + Test			Result - Remark	Verdict
Fuse	Sun Electric Co.	4T	250 VAC; 5 A	EN 60127-1 EN 60127-3	TUV R 50421156
NTC	Nanjing Shiheng Electronics Co.,Ltd.	MF725D9	240 V; R <sub>25</sub> : 5 Ω ; 2,85 A	EN 60539-1	TUV R 50245892
Varistor	BestBright Electronics Co., Ltd.	471KD14	470 V; T85	EN 61051-1 IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40050493
Varistor (Alternative)	Guangdong Fenghua Advanced Technology Holding Co., Ltd.	FNR-14K471	470 V; T85	EN 61051-1 IEC 61051-1 IEC 61051-2 IEC 61051-2-2	VDE 40008242
Optocoupler	Sharp Corporation, Sakai Factory.	PC817	Cr. / Cl. / Dti.: ≥ 6,4 mm / ≥ 6,4 mm / >0,4 mm; 55/110/21; CTI 175	EN IEC 60747-5- 5	VDE 40008087
Optocoupler (Alternative)	Everlight Electronics Co., Ltd.	EL817	Cr. / Cl. / Dti.: ≥ 7,6 mm / ≥ 7,6 mm / >0,4 mm; 55/110/21; CTI 175	EN IEC 60747-5- 5	VDE 132249
Transformer	Dongguan Dpower Electronics Co., Ltd	ET00582P	PQ3230; Pri. Winding: N1 (pin 5-6): Ø 0,6 mm / 17Ts; N6 (pin 5-3): Ø 0,6 mm / 17Ts; N5 (pin 2-4): Ø 0,2 mm x 6P / 5 Ts Sec. Winding: N2 (pin 10-7): Ø 0,5 mm x 4P / 5 Ts; N3 (pin 11-8): Ø 0,5 mm x 4P / 5 Ts; N4 (pin 12-9): Ø 0,5 mm x 4P / 5 Ts Class 105	EN 60335-1	Tested with appliance

IEC 60335-1					
Clause	Requirement + Test			Result - Remark	Verdict
--Bobbin	Chang Chun Plastics Co Ltd	T375HF	V-0; 150 °C	EN 60335-1	Tested with appliance UL E59481
--Winding	Dong Guan Yida Industrial Co., Ltd.	xUEW/130, QA-x/130	130 °C	EN 60335-1	Tested with appliance UL E344055
--Insulation Tape (Alternative)	Suzhou Mailaduona Electric Material Co., Ltd.	JY313#	130°C	EN 60335-1	Tested with appliance UL E188295
--Insulation Tape (Alternative)	Jingjiang Yahua Pressure Sensitive Glue Co., Ltd.	PZ	130 °C		Tested with appliance UL E165111
--Margin Tape	Chang Shu Liang Yi Tape Industry Co., Ltd.	LY-19-XX-20	130 °C; 3,3 mm (width)	EN 60335-1	Tested with appliance UL E246820
Plastic enclosure	Zhongshengyuan (Xiamen) Industrial Co., Ltd.	K5311A-S00001	Min. Thickness: 3,0mm	EN 60335-1	Tested with appliance
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

28.1	TABLE: Threaded part torque test			P
Threaded part identification:	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Earth screw	3,90	II	1,2	
Supplementary information:				

29.1	TABLE: Clearances					P
	Overvoltage category.....: .....				II	—
	Type of insulation:					
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark
330	0,2* / 0,5 / 0,8**					
500	0,2* / 0,5 / 0,8**					
800	0,2* / 0,5 / 0,8**					
1 500	0,5 / 0,8** / 1,0***					
2 500	1,5 / 2,0***	B1	S1		F1	P

IEC 60335-1						
Clause	Requirement + Test			Result - Remark		Verdict
4 000	3,0 / <b>3,5</b> <sup>***</sup>			R1		P
6 000	5,5 / 6,0 <sup>***</sup>					
8 000	8,0 / 8,5 <sup>***</sup>					
10 000	11,0 / 11,5 <sup>***</sup>					
Supplementary information: *) For tracks on printed circuit boards if pollution degree 1 and 2 **) For pollution degree 3 ***) If the construction is affected by wear, distortion, movement of the parts or during assembly B1: B/W live part of PCB and earthing metal: 7,4 mm; F1: B/W L and N on main power PCB: 2,9 mm; S1: B/W internal wiring and accessible surface: 8,6 mm; R1: B/W live part and SELV part on power PCB: 6,6 mm						

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P	
Working voltage (V):	Creepage distance (mm)							Type of insulation				Verdict
	Pollution degree											
	1	2			3			Type of insulation				
		Material group			Material group							
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	Verdict	
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—		
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—		
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—			
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—		
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—		
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—			
250	0,56	1,25	1,8	<b>2,5</b>	3,2	3,6	4,0	B1	—	—	P	
250	0,56	1,25	1,8	<b>2,5</b>	3,2	3,6	4,0	—	S1	—	P	
250	1,12	2,5	3,6	<b>5,0</b>	6,4	7,2	8,0	—	—	R1	P	
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—		
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—		
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—			
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—		
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—		
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—			

IEC 60335-1											
Clause	Requirement + Test							Result - Remark			Verdict
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	

IEC 60335-1											
Clause	Requirement + Test							Result - Remark			Verdict
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		
Supplementary information:											
*) Material group IIIb is allowed if the working voltage does not exceed 50 V											
**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation											
B1: B/W live part of PCB and earthing metal: 7,4 mm;											
S1: B/W internal wiring and accessible surface: 8,6 mm;											
R1: B/W live part and SELV part on power PCB: 6,6 mm											

29.2	TABLE: Creepage distances, functional insulation							P
Working voltage (V):	Creepage distance (mm)							Verdict / Remark
	Pollution degree							
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	
250	0,42	1,0	1,4	<b>2,0</b>	2,5	2,8	3,2	<b>P</b>
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	

IEC 60335-1									
Clause	Requirement + Test							Result - Remark	Verdict
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		
Supplementary information: *) Material group IIIb is allowed if the working voltage does not exceed 50 V F1: B/W L and N on main power PCB: 2,9 mm									

30.1	TABLE: Ball Pressure Test of Thermoplastics				P
Allowed impression diameter (mm) .....				2,0	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)		Impression diameter (mm)	
Transformer bobbin	—	125		0,91	
Plastic enclosure	—	75		1,13	
Terminal block on EMI filter	—	125		0,93	
Fuse holder	—	125		1,17	
Supplementary information:					

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Transformer bobbin	—	—	—	—	0s	0s	—	P
Plastic enclosure	—	X	—	—	—	—	—	P
Sleeving	—	—	—	—	0s	0s	—	P
Fuse holder	—	—	—	—	0s	0s	—	P
Switch	—	—	—	—	0s	0s	—	P
Terminal block on EMI filter	—	—	—	—	0s	0s	—	P
Bobbin of electromagnetic brake	—	—	—	—	0s	0s	—	P




IEC 60335-1								
Clause	Requirement + Test					Result - Remark		Verdict
Terminal of electromagnetic brake	—	—	—	—	0s	0s	—	P
Bobbin of alternative electromagnetic brake	—	—	—	—	0s	0s	—	P
Terminal of alternative electromagnetic brake	—	—	—	—	0s	0s	—	P
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
—	—	—	—	—	—	—	—	—
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No):								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)..... :								N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?..... :								Yes
Ignition of the specified layer placed underneath the test specimen (Yes/No) ..... :								No
Supplementary information: - 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF - The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances								


30.2/30.2.4	TABLE: Needle- flame test (NFT)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCBs	—	30	No	0	P
Supplementary information: - NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1 - NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0					

---End of main Report---


Main Power Board

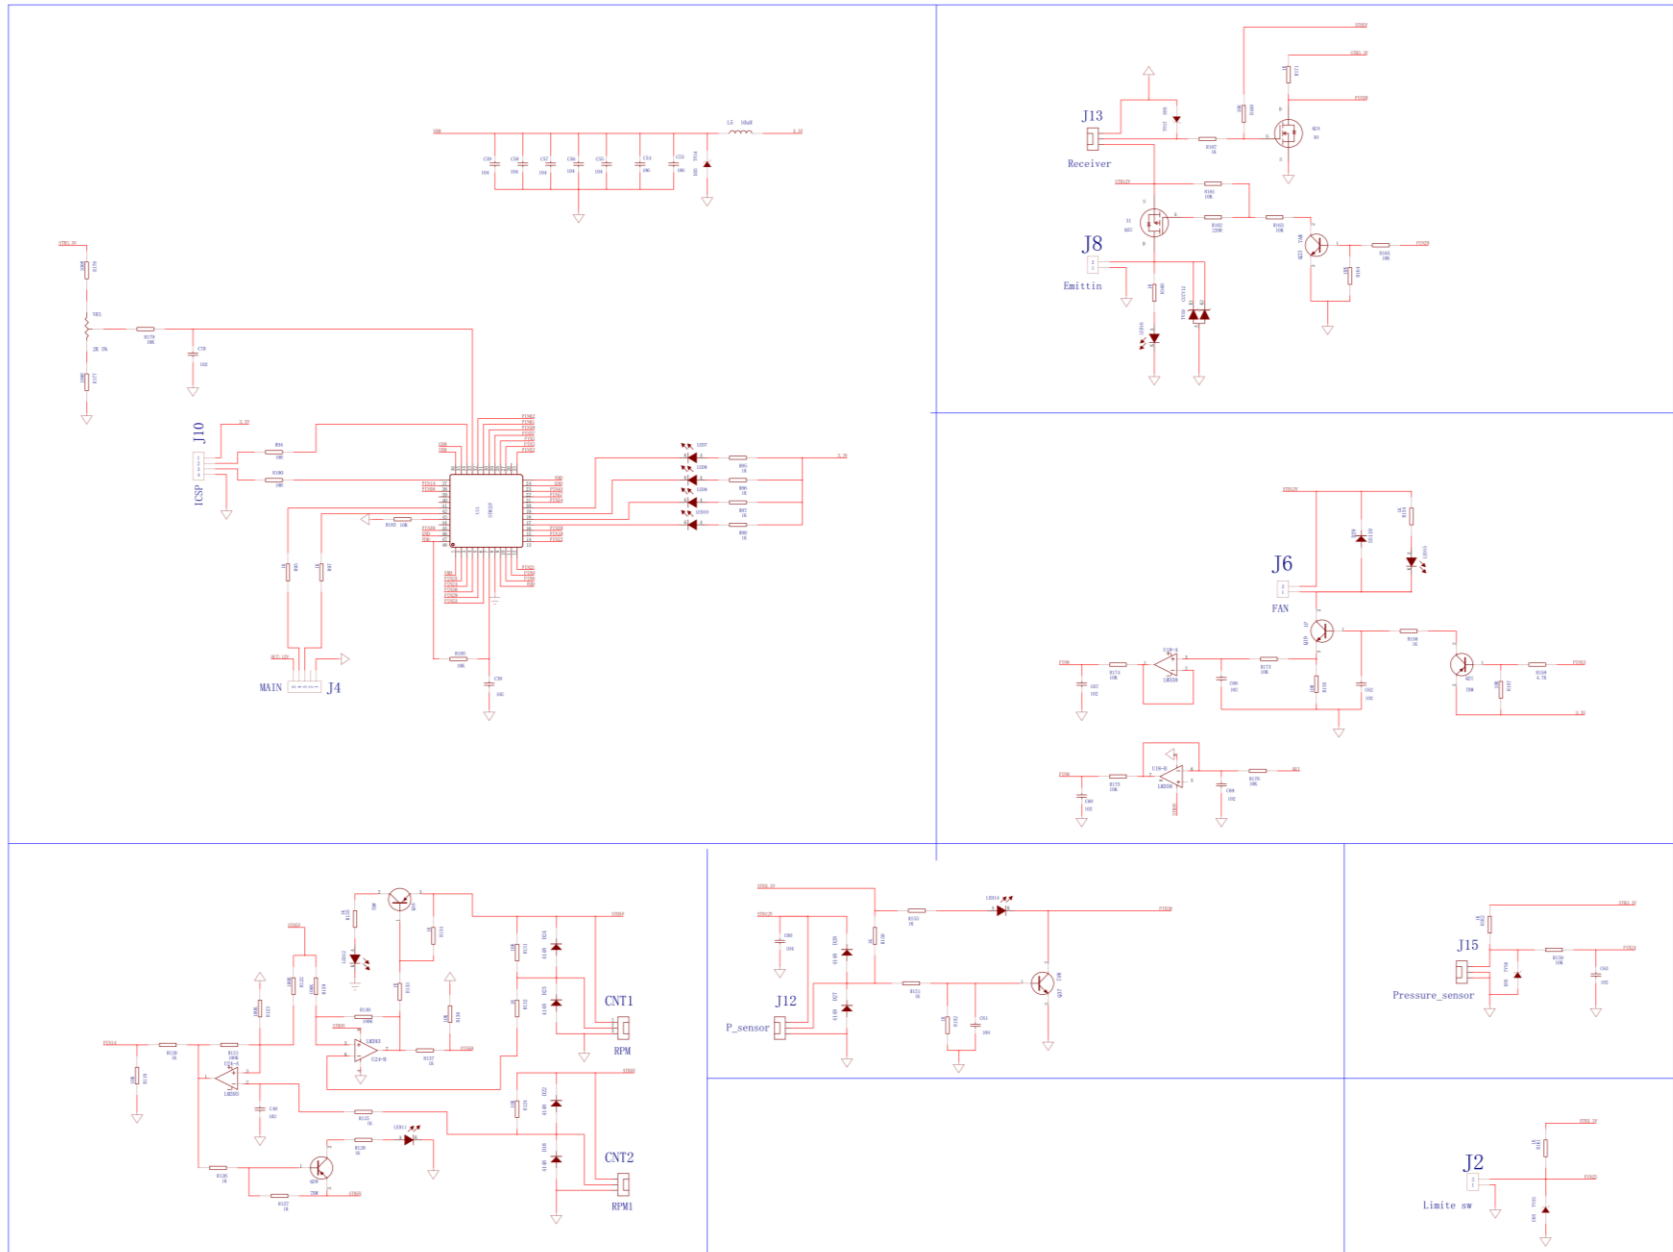


Main Power Board

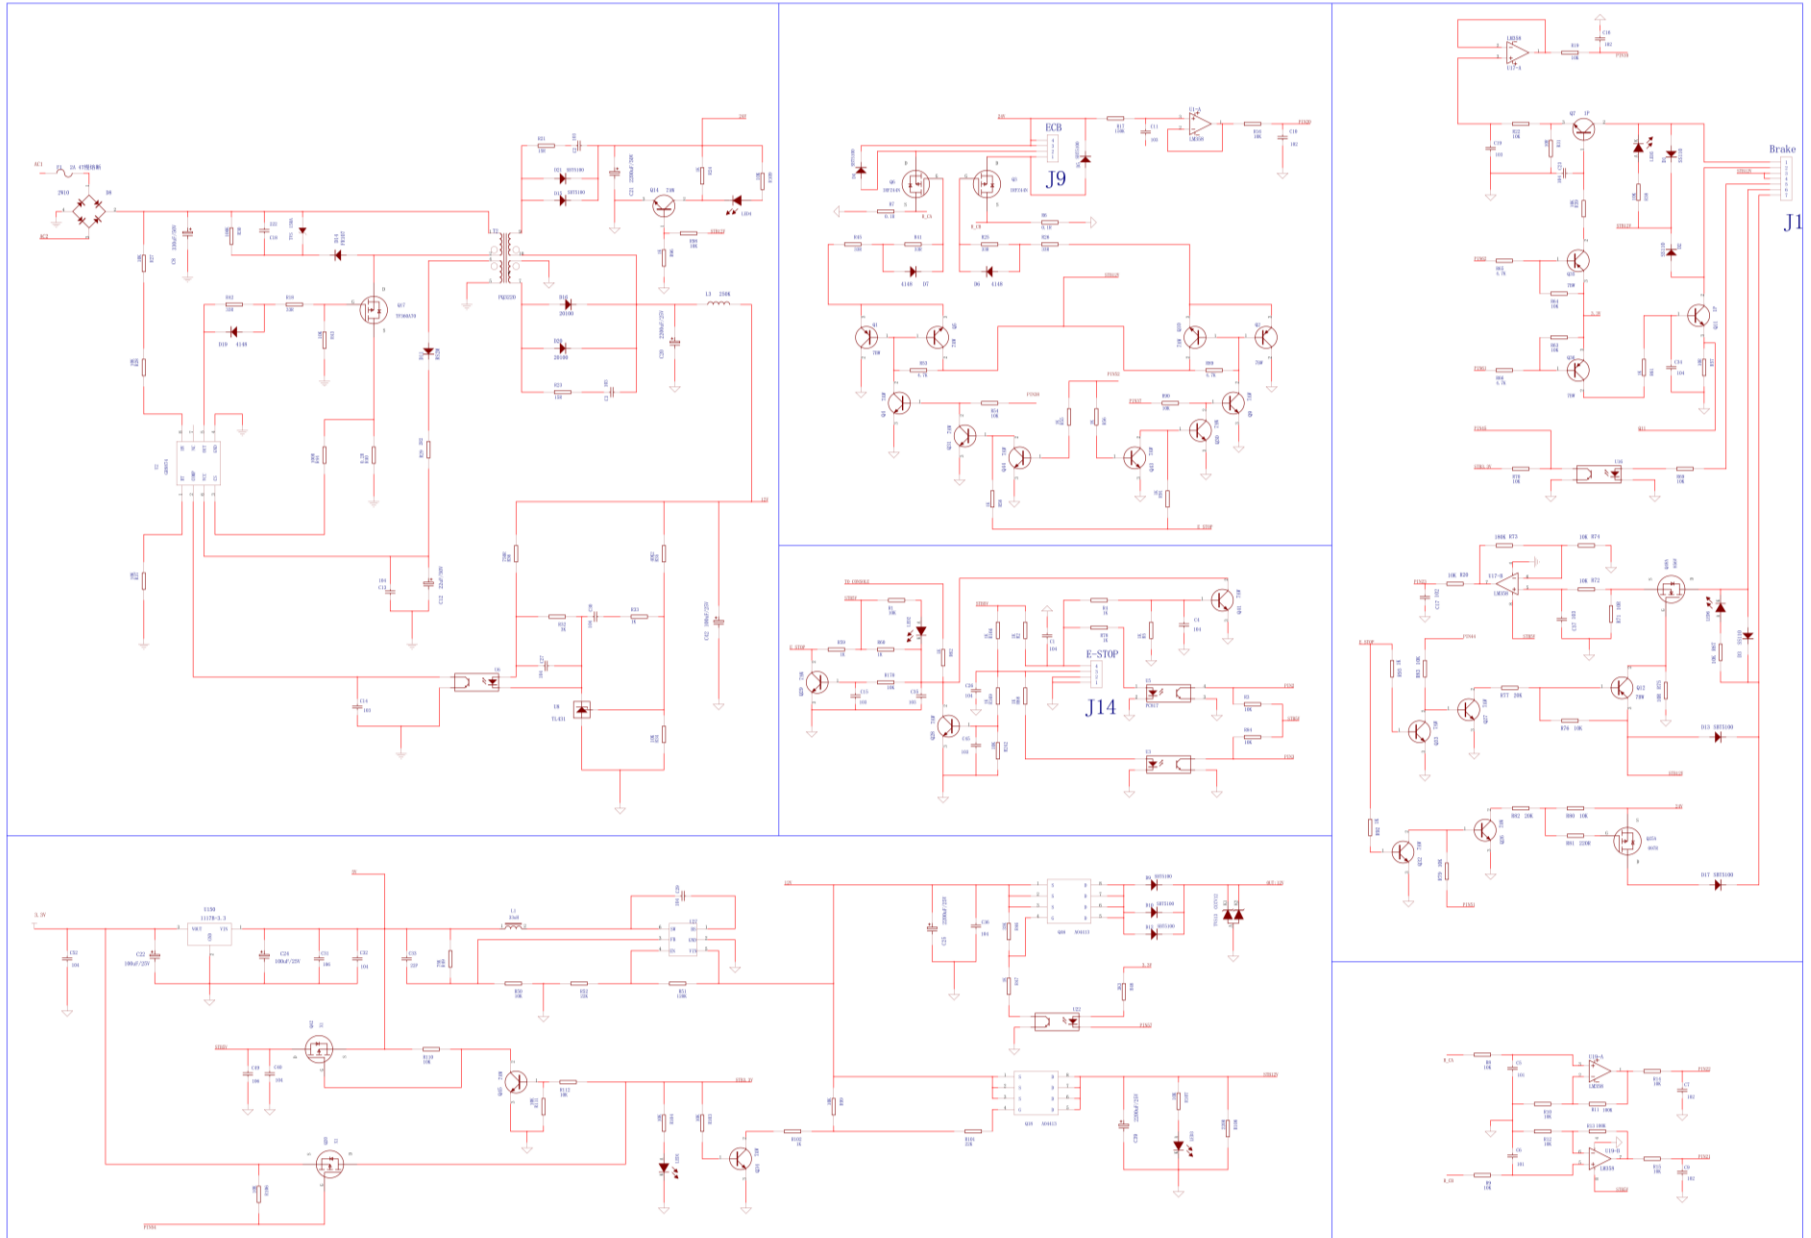

Control Panel (Multi-Function Display)

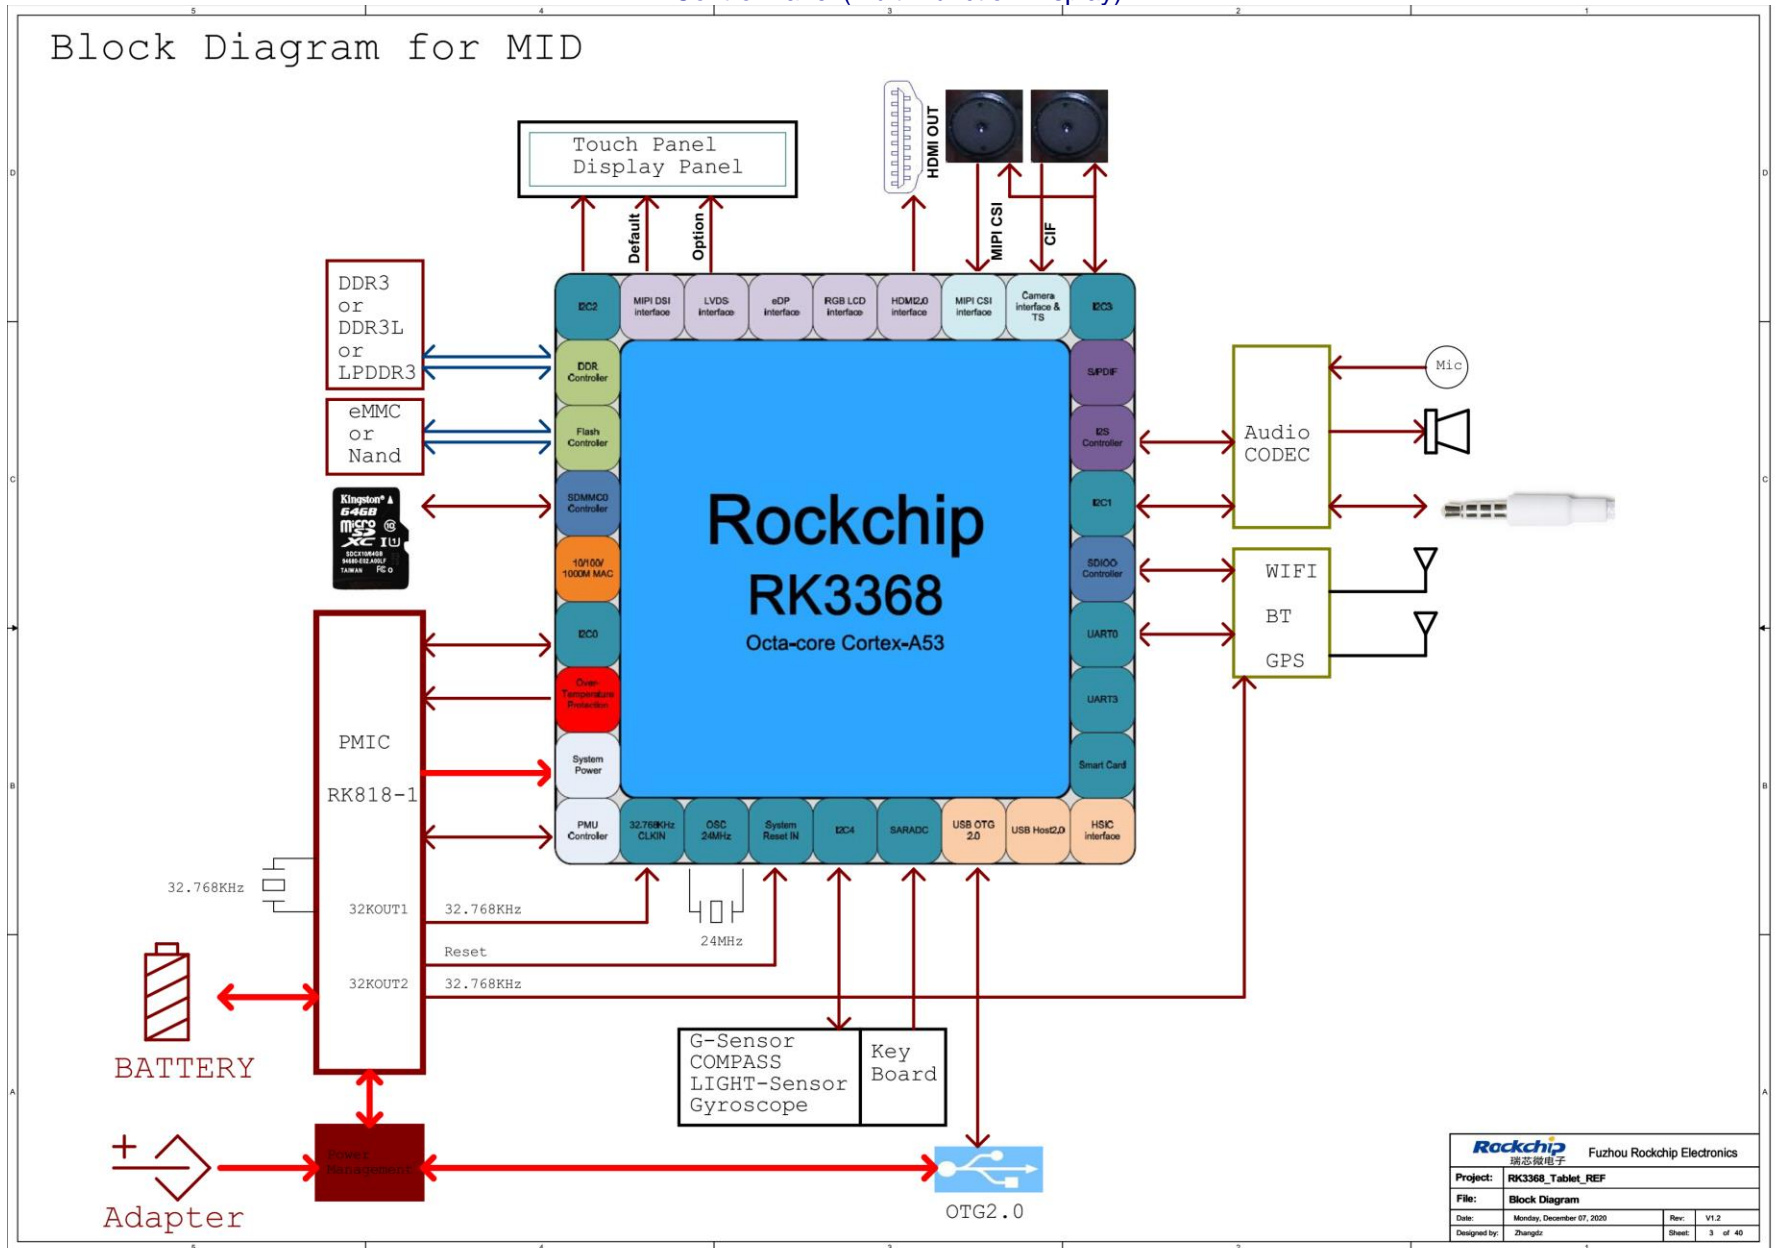


Control Panel (Multi-Function Display)

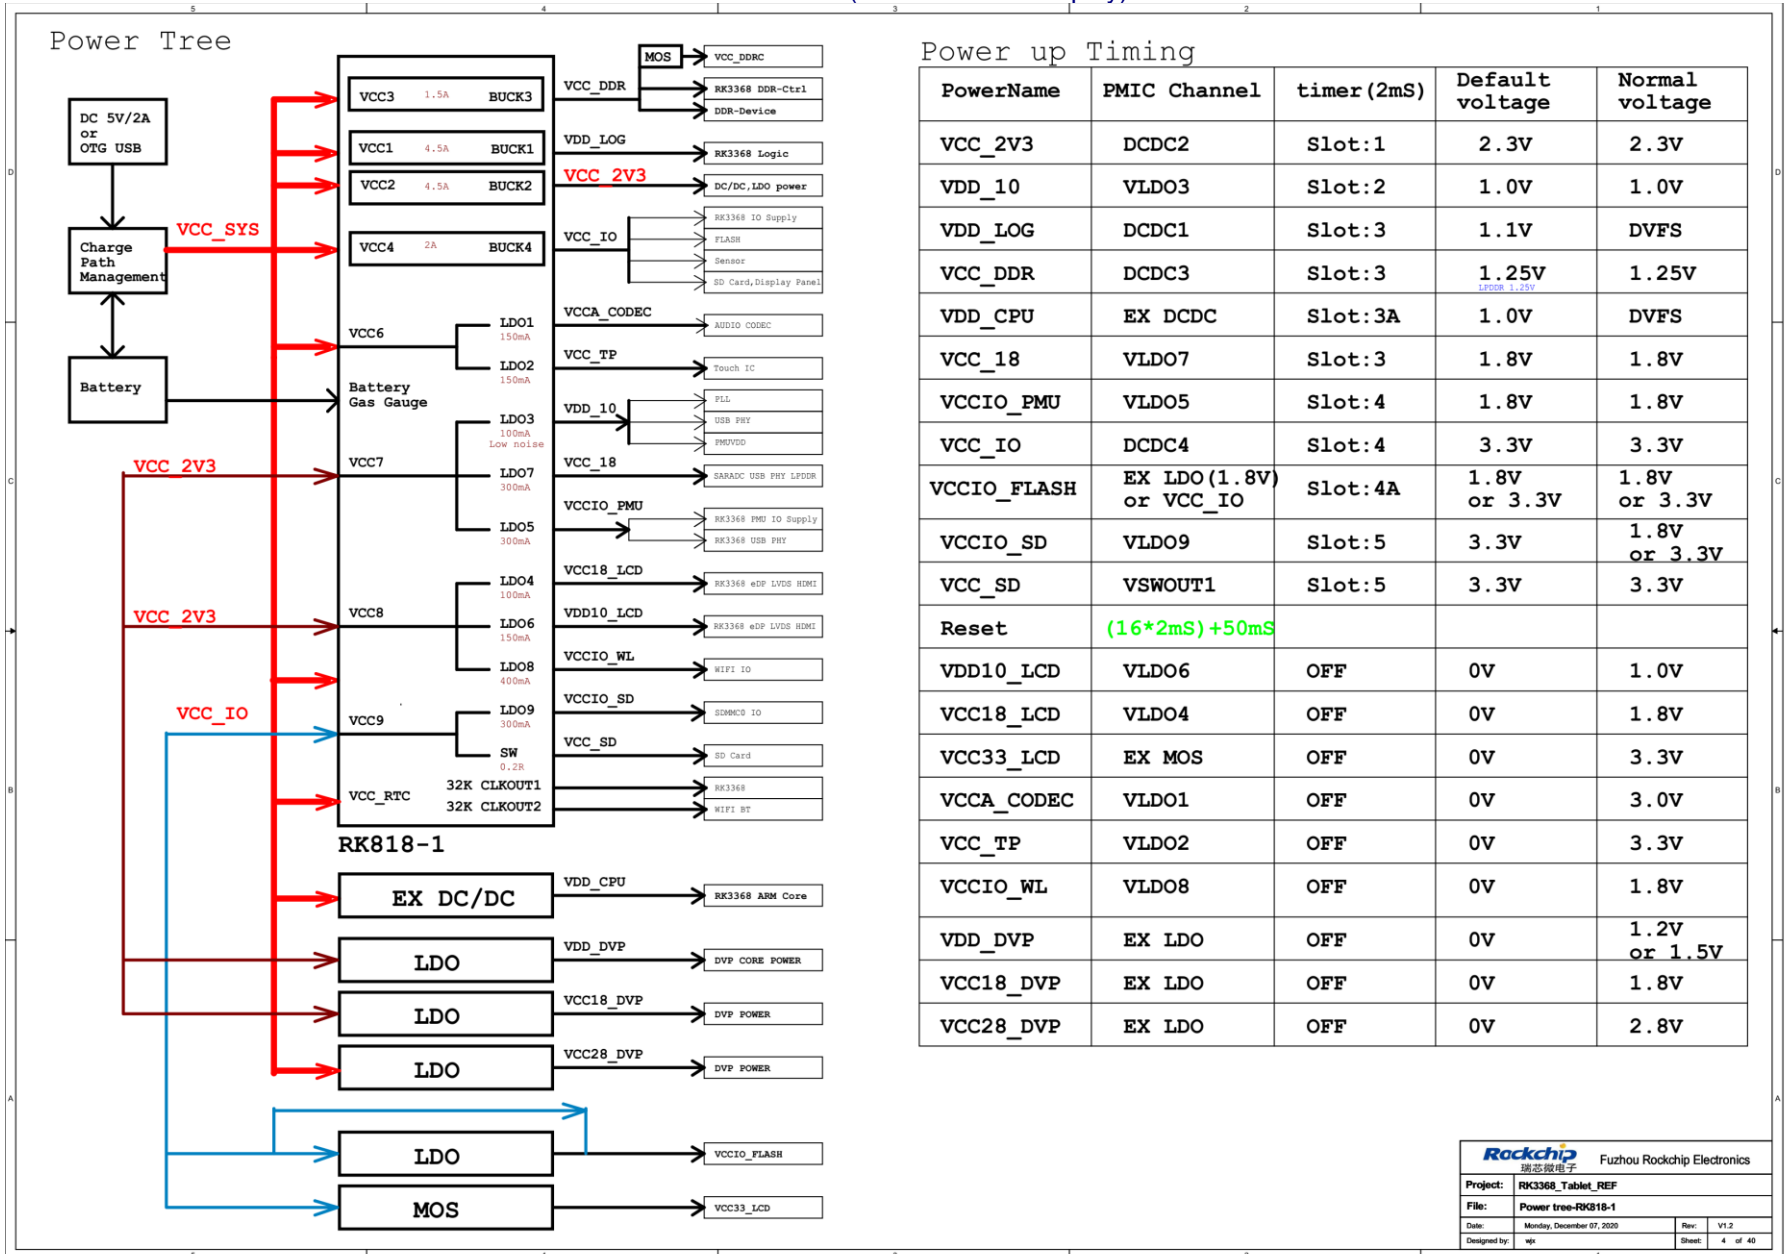

Power up Timing


PowerName	PMIC Channel	timer (2mS)	Default voltage	Normal voltage
VCC_2V3	DCDC2	Slot:1	2.3V	2.3V
VDD_10	VLDO3	Slot:2	1.0V	1.0V
VDD_LOG	DCDC1	Slot:3	1.1V	DVFS
VCC_DDR	DCDC3	Slot:3	1.25V <small>UPON 1.25V</small>	1.25V
VDD_CPU	EX DCDC	Slot:3A	1.0V	DVFS
VCC_18	VLDO7	Slot:3	1.8V	1.8V
VCCIO_PMU	VLDO5	Slot:4	1.8V	1.8V
VCC_IO	DCDC4	Slot:4	3.3V	3.3V
VCCIO_FLASH	EX LDO (1.8V) or VCC_IO	Slot:4A	1.8V or 3.3V	1.8V or 3.3V
VCCIO_SD	VLDO9	Slot:5	3.3V	1.8V or 3.3V
VCC_SD	VSWOUT1	Slot:5	3.3V	3.3V
Reset		(16*2mS)+50mS		
VDD10_LCD	VLDO6	OFF	0V	1.0V
VCC18_LCD	VLDO4	OFF	0V	1.8V
VCC33_LCD	EX MOS	OFF	0V	3.3V
VCCA_CODECC	VLDO1	OFF	0V	3.0V
VCC_TP	VLDO2	OFF	0V	3.3V
VCCIO_WL	VLDO8	OFF	0V	1.8V
VDD_DVP	EX LDO	OFF	0V	1.2V or 1.5V
VCC18_DVP	EX LDO	OFF	0V	1.8V
VCC28_DVP	EX LDO	OFF	0V	2.8V

Control Panel (Multi-Function Display)

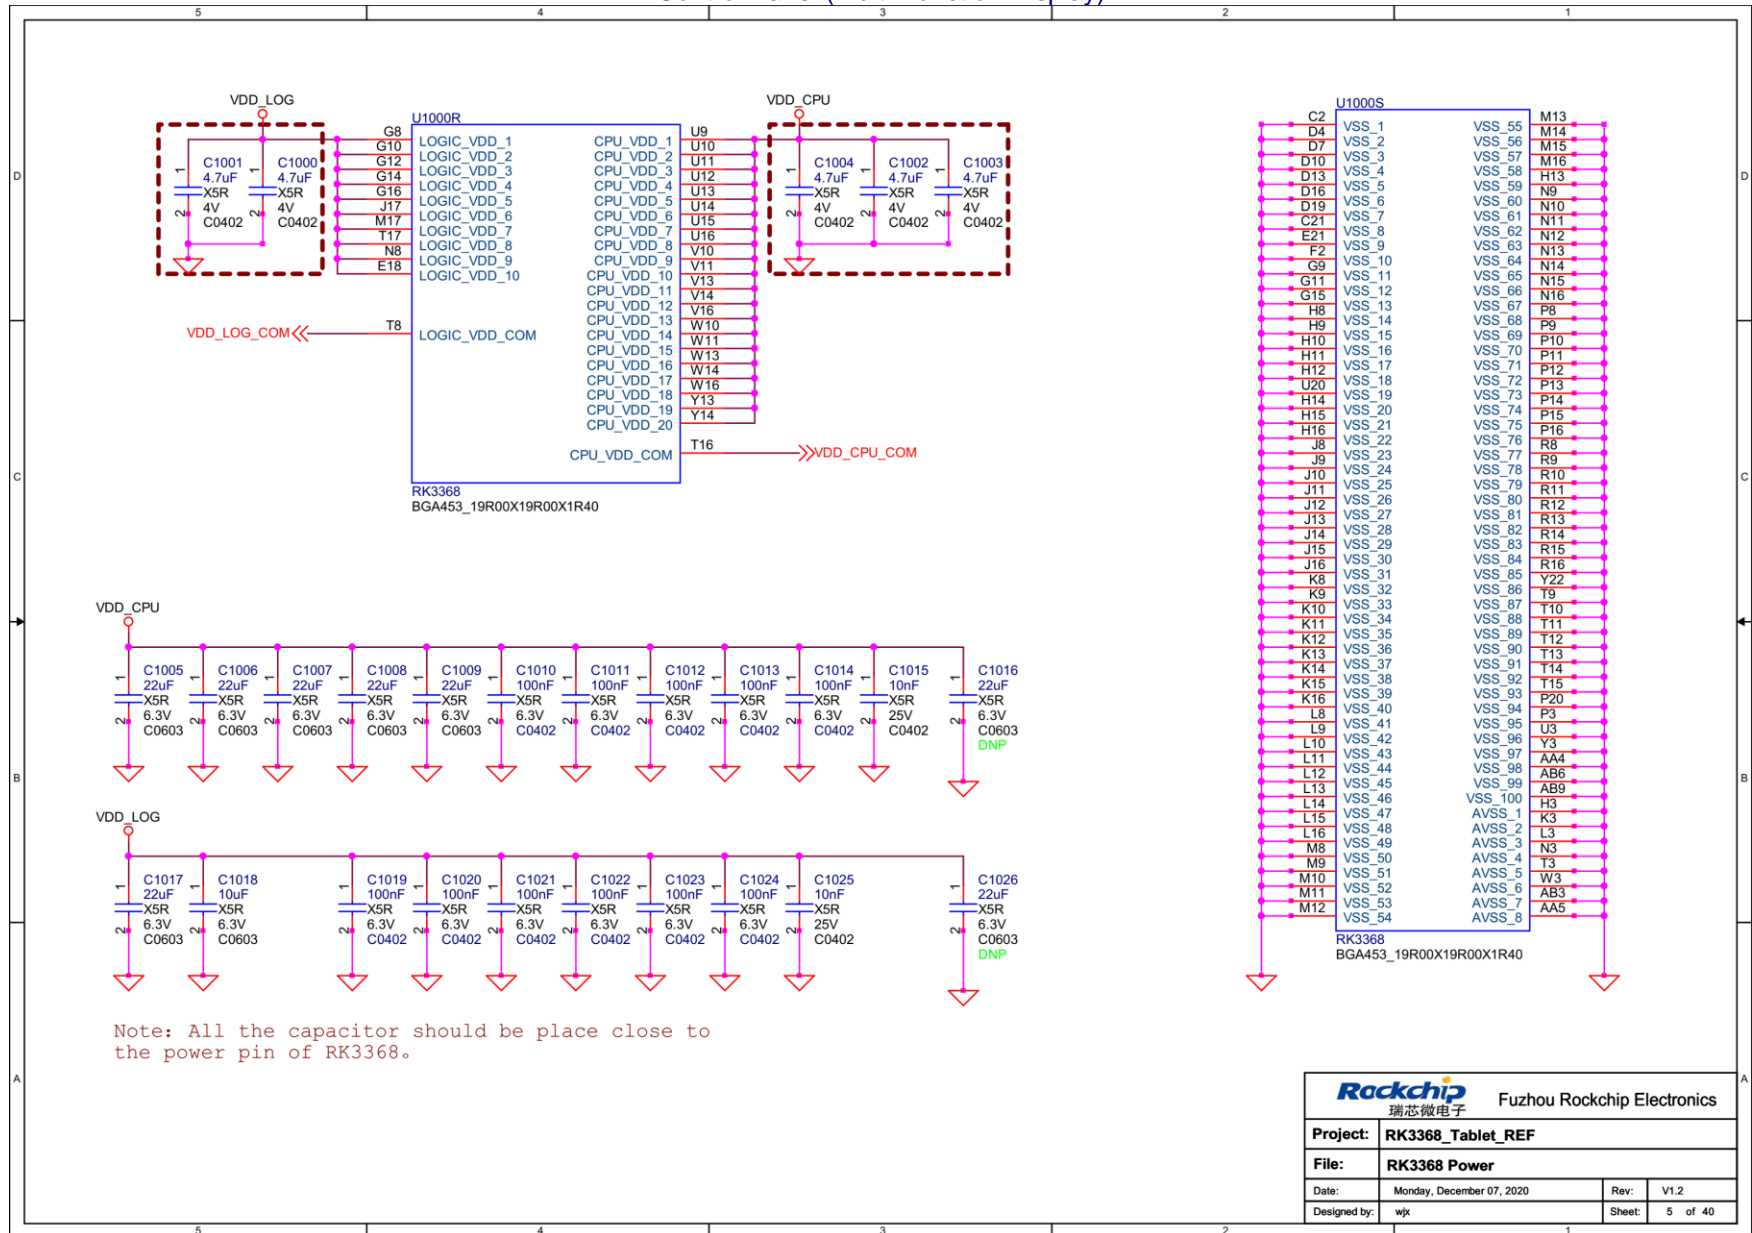


<b>Rackchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b> RK3368_Tablet_REF			
<b>File:</b> RK3368 Power			
Date:	Monday, December 07, 2020	Rev:	V1.2
Designed by:	wjx	Sheet:	5 of 40

Control Panel (Multi-Function Display)

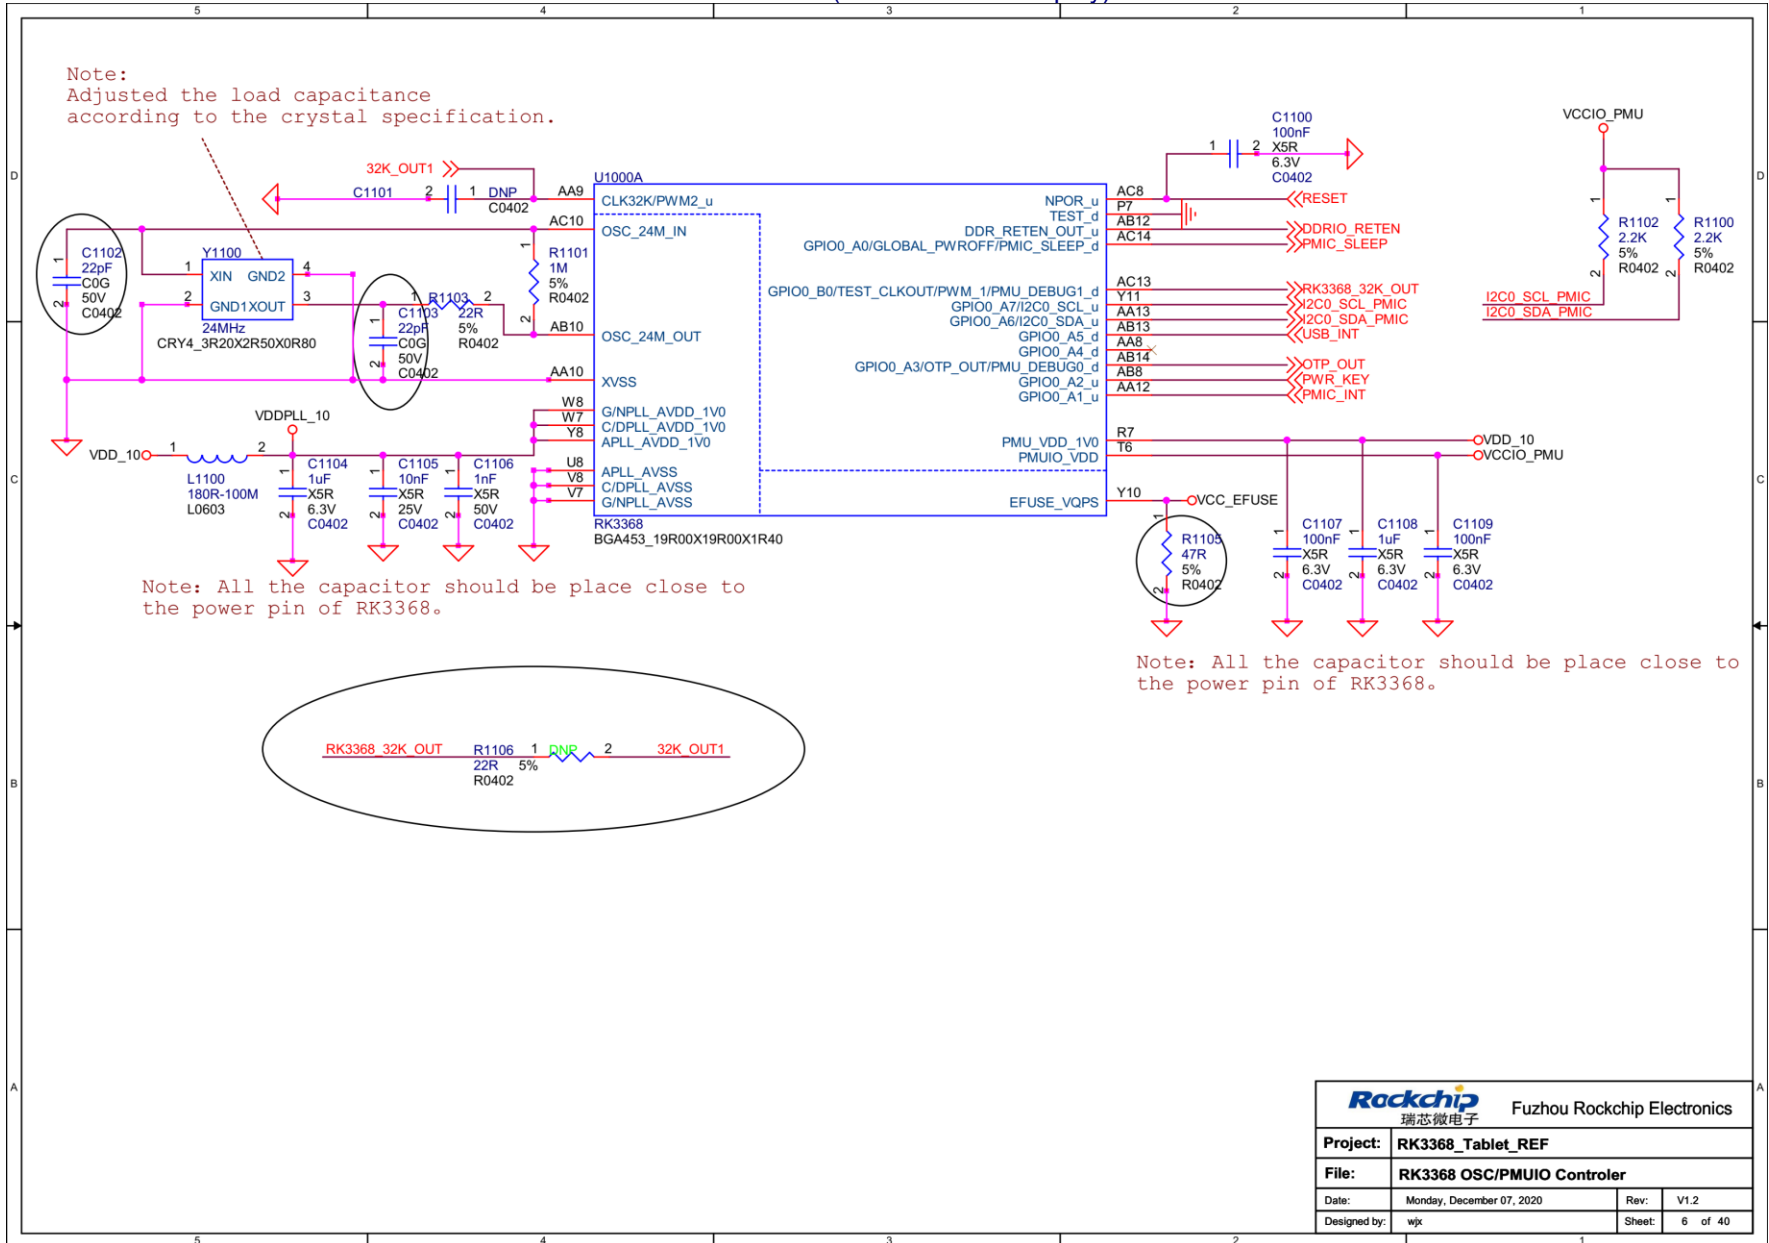

<b>Rockchip</b> 瑞芯微电子 Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF
<b>File:</b>	RK3368 OSC/PMUIO Controller
<b>Date:</b>	Monday, December 07, 2020
<b>Designed by:</b>	wk
<b>Rev:</b>	V1.2
<b>Sheet:</b>	6 of 40


Control Panel (Multi-Function Display)

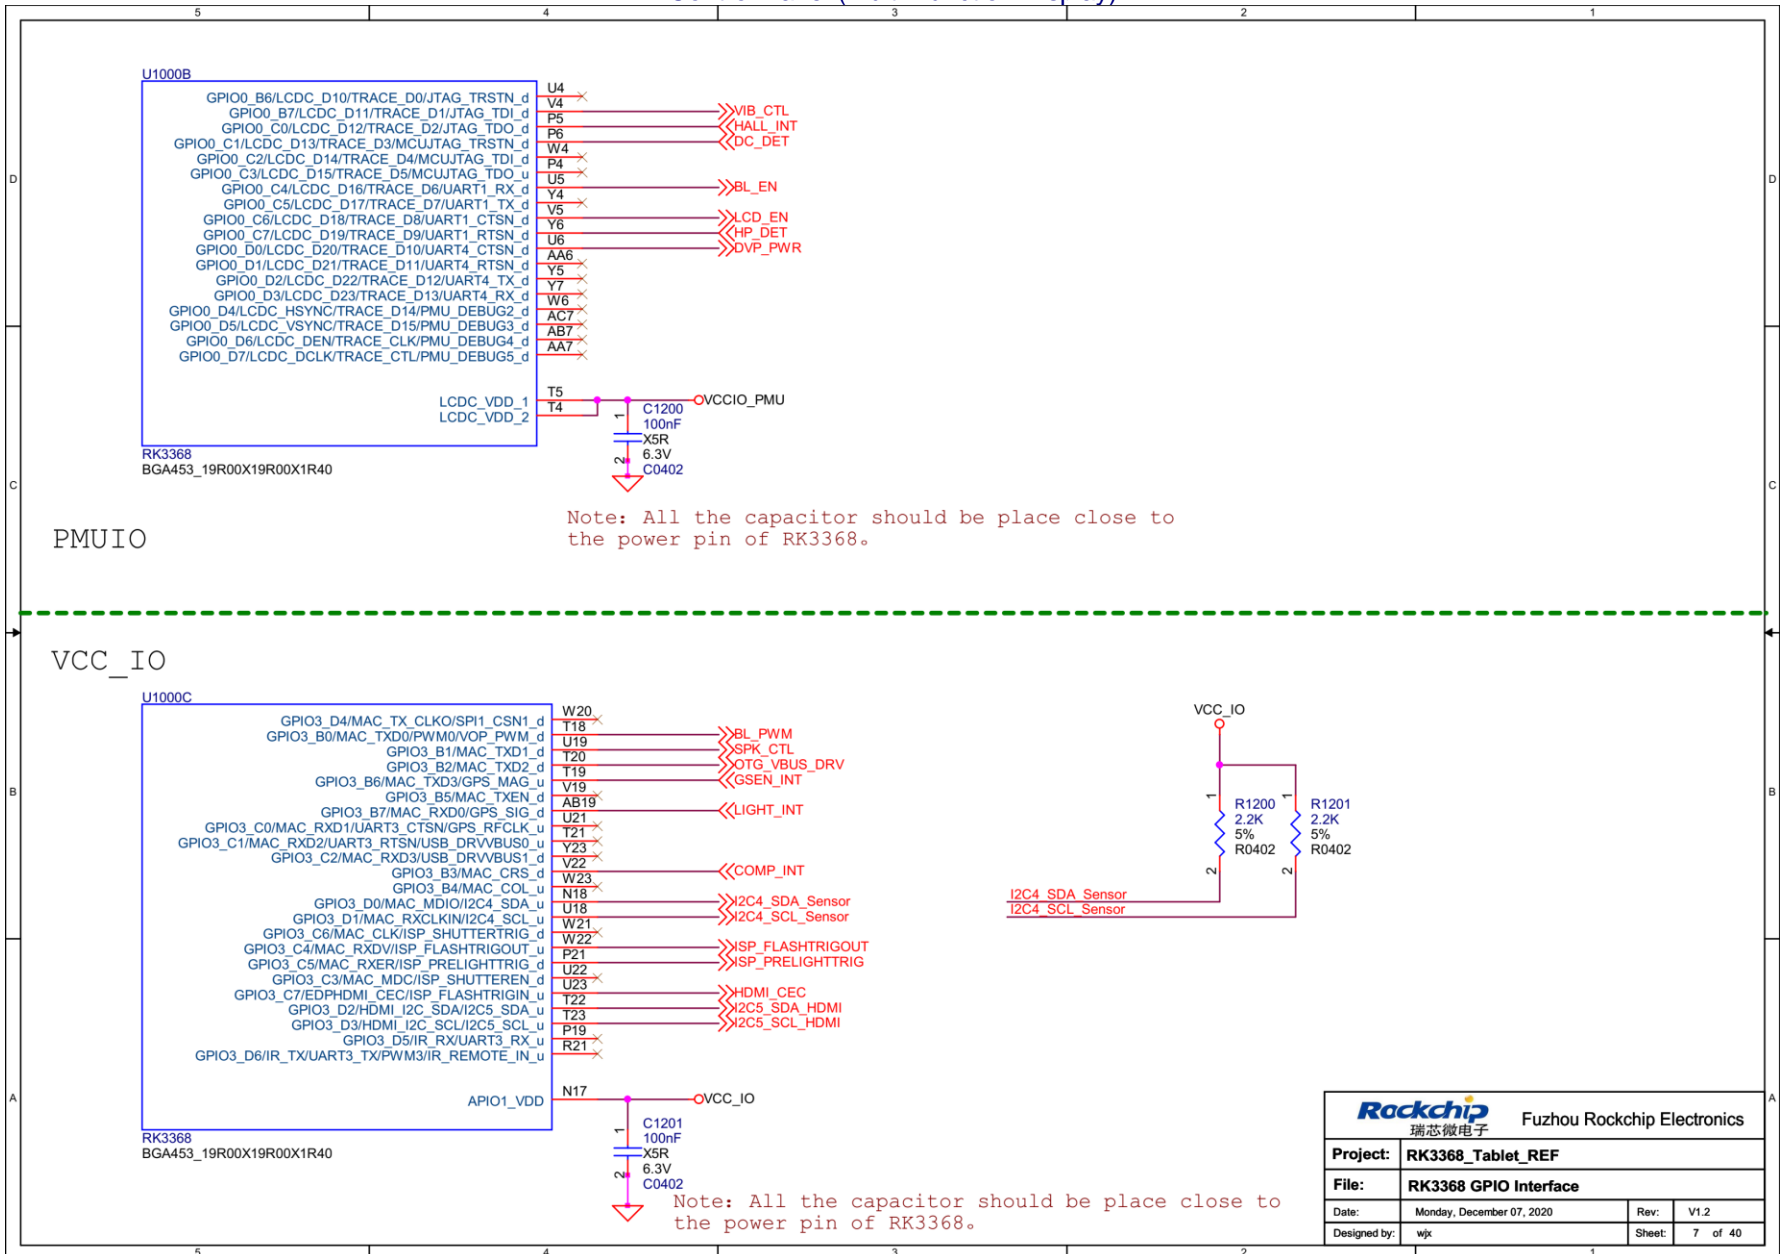

<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	RK3368 GPIO Interface		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	7 of 40



Control Panel (Multi-Function Display)

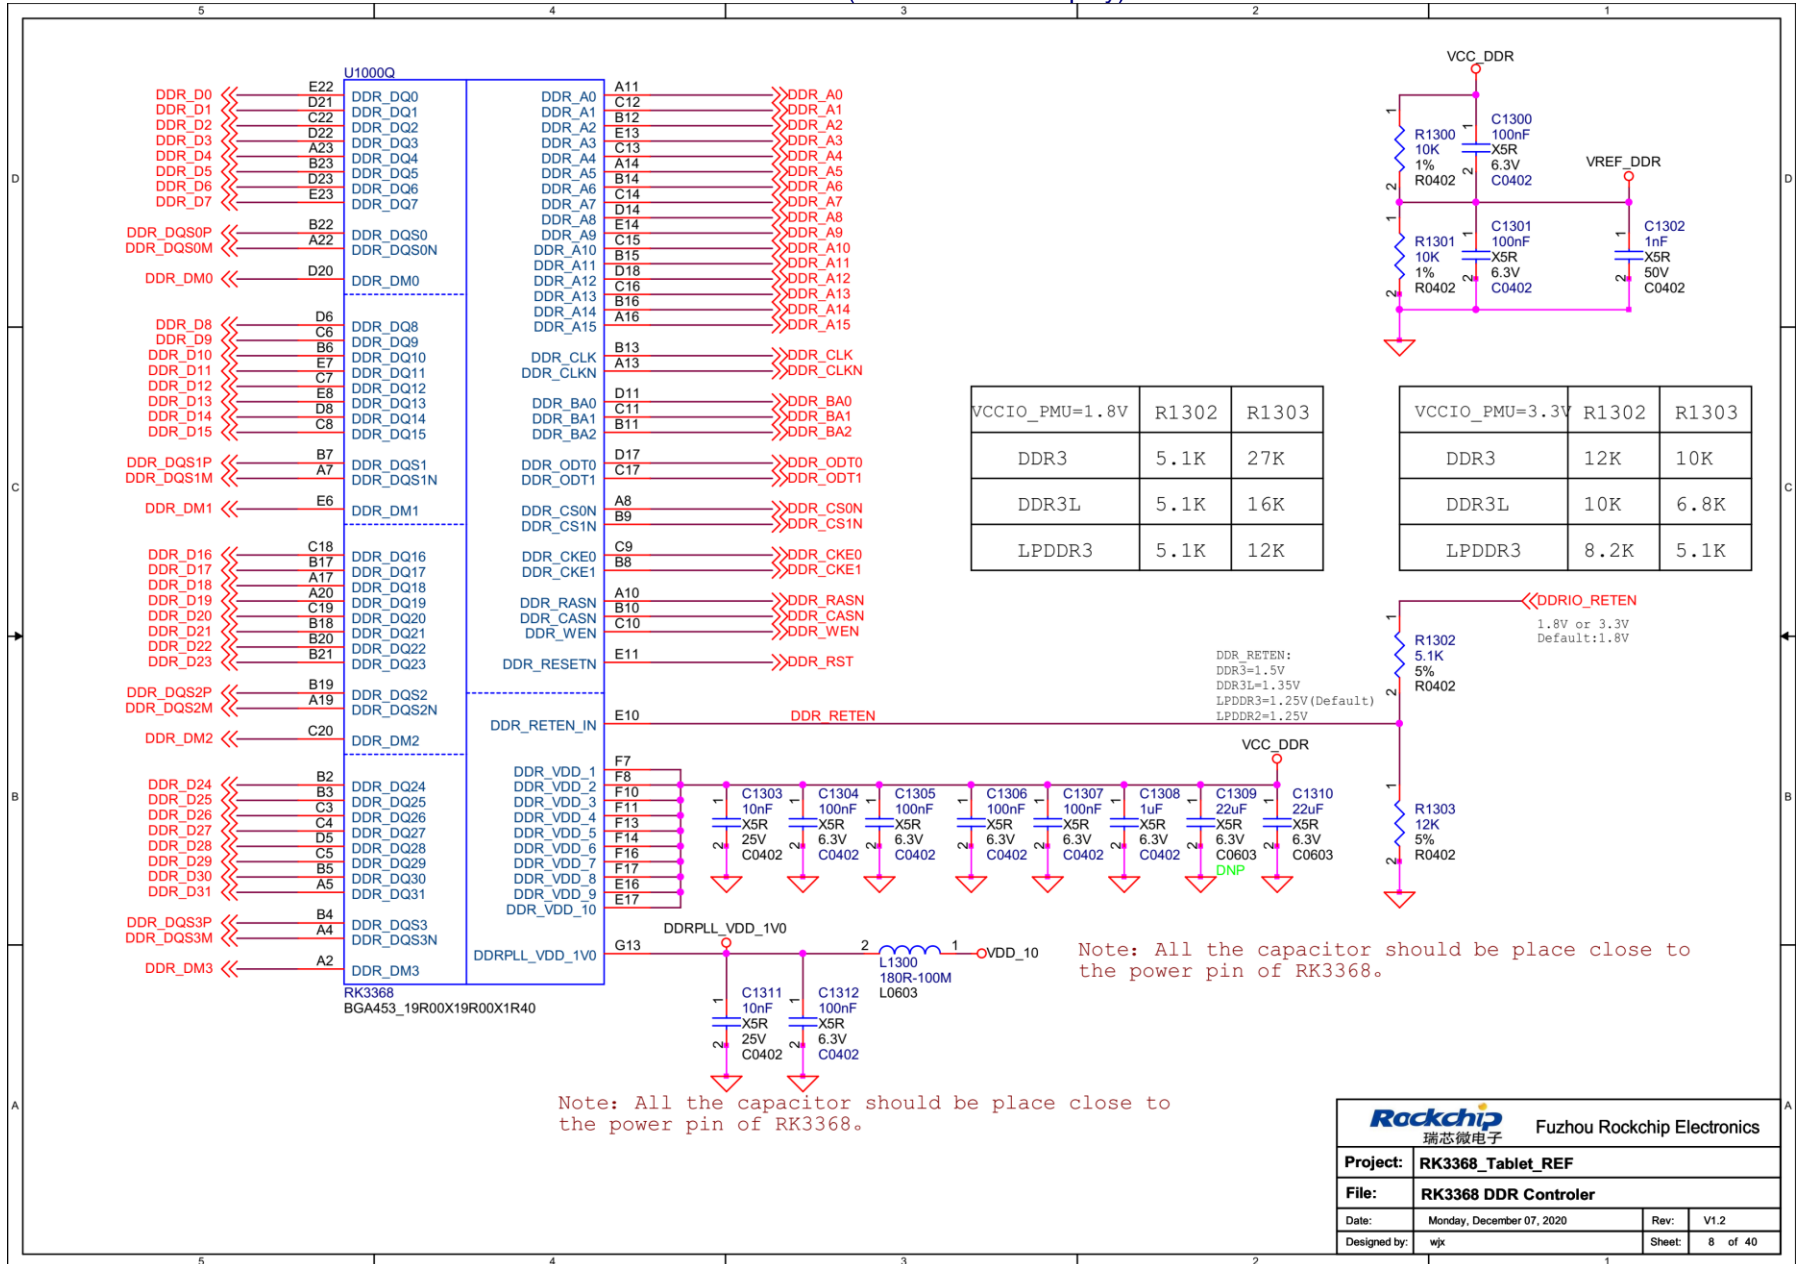

**Rackchip** 瑞芯微电子 Fuzhou Rockchip Electronics


Project: RK3368\_Tablet\_REF

File: RK3368 DDR Controler

Date: Monday, December 07, 2020 Rev: V1.2

Designed by: wjx Sheet: 8 of 40

Control Panel (Multi-Function Display)

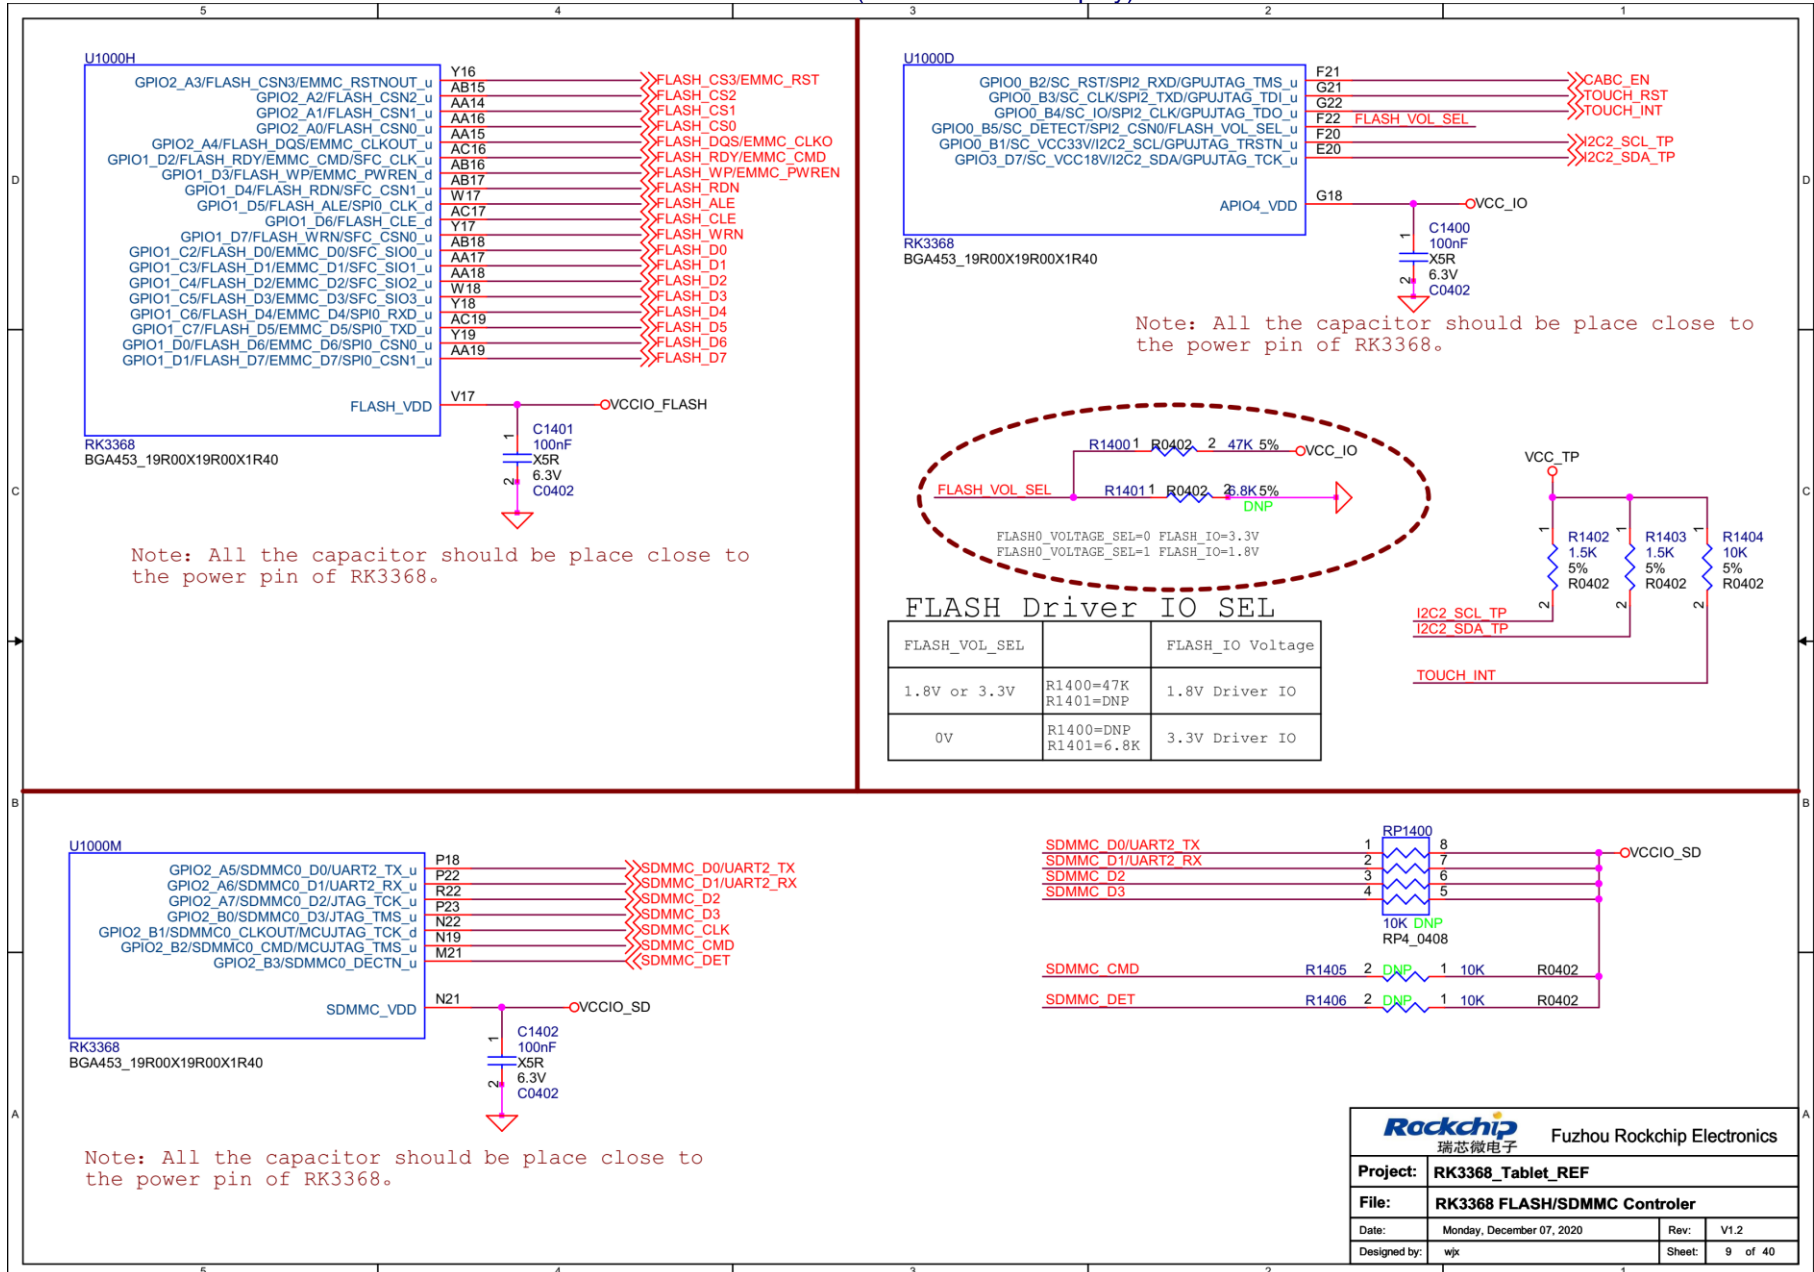

**Rockchip** 瑞芯微电子 Fuzhou Rockchip Electronics


Project: RK3368\_Tablet\_REF

File: RK3368 FLASH/SDMMC Controler

Date: Monday, December 07, 2020 Rev: V1.2


Designed by: wjx Sheet: 9 of 40

Control Panel (Multi-Function Display)

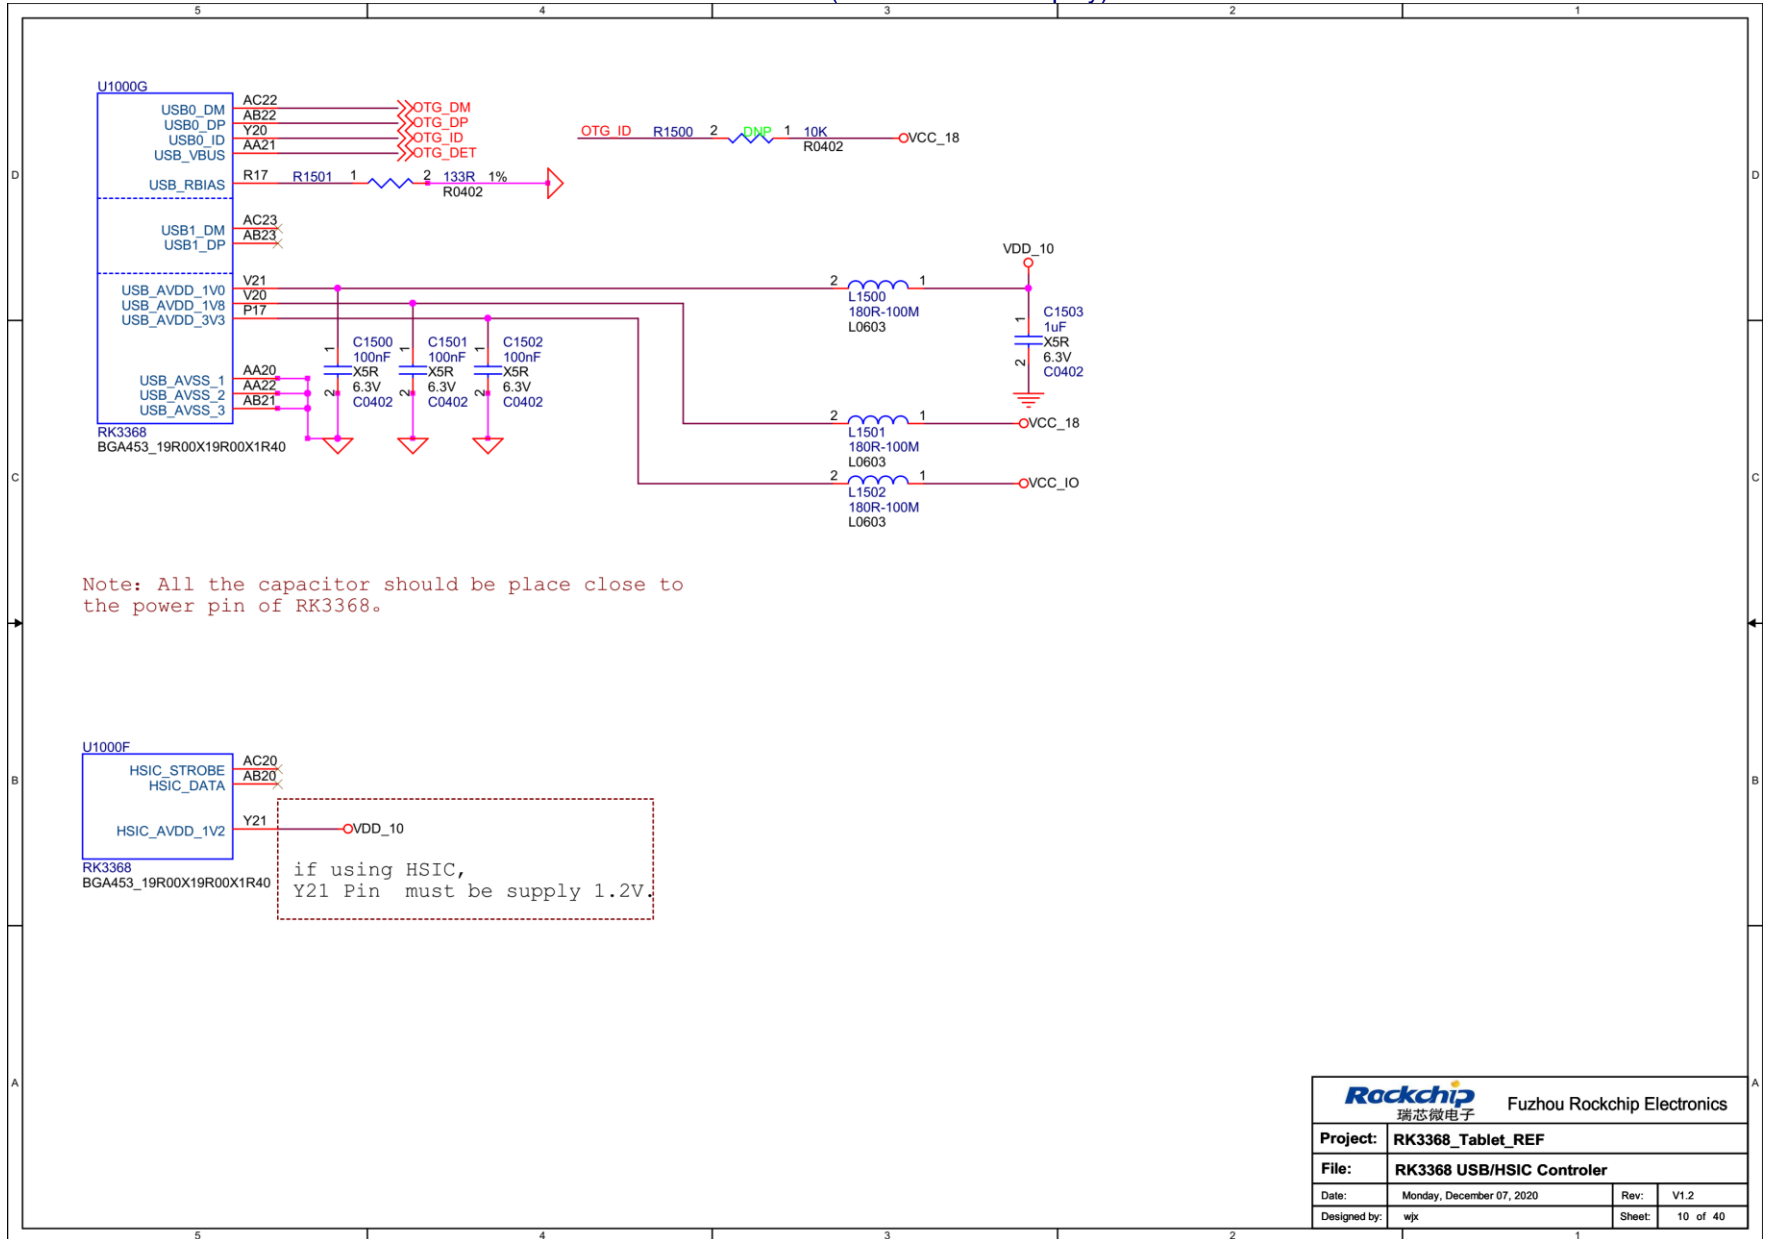


<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b> RK3368_Tablet_REF			
<b>File:</b> RK3368_USB/HSIC Controler			
<b>Date:</b> Monday, December 07, 2020	<b>Rev:</b> V1.2		
<b>Designed by:</b> wjx	<b>Sheet:</b> 10 of 40		

Control Panel (Multi-Function Display)

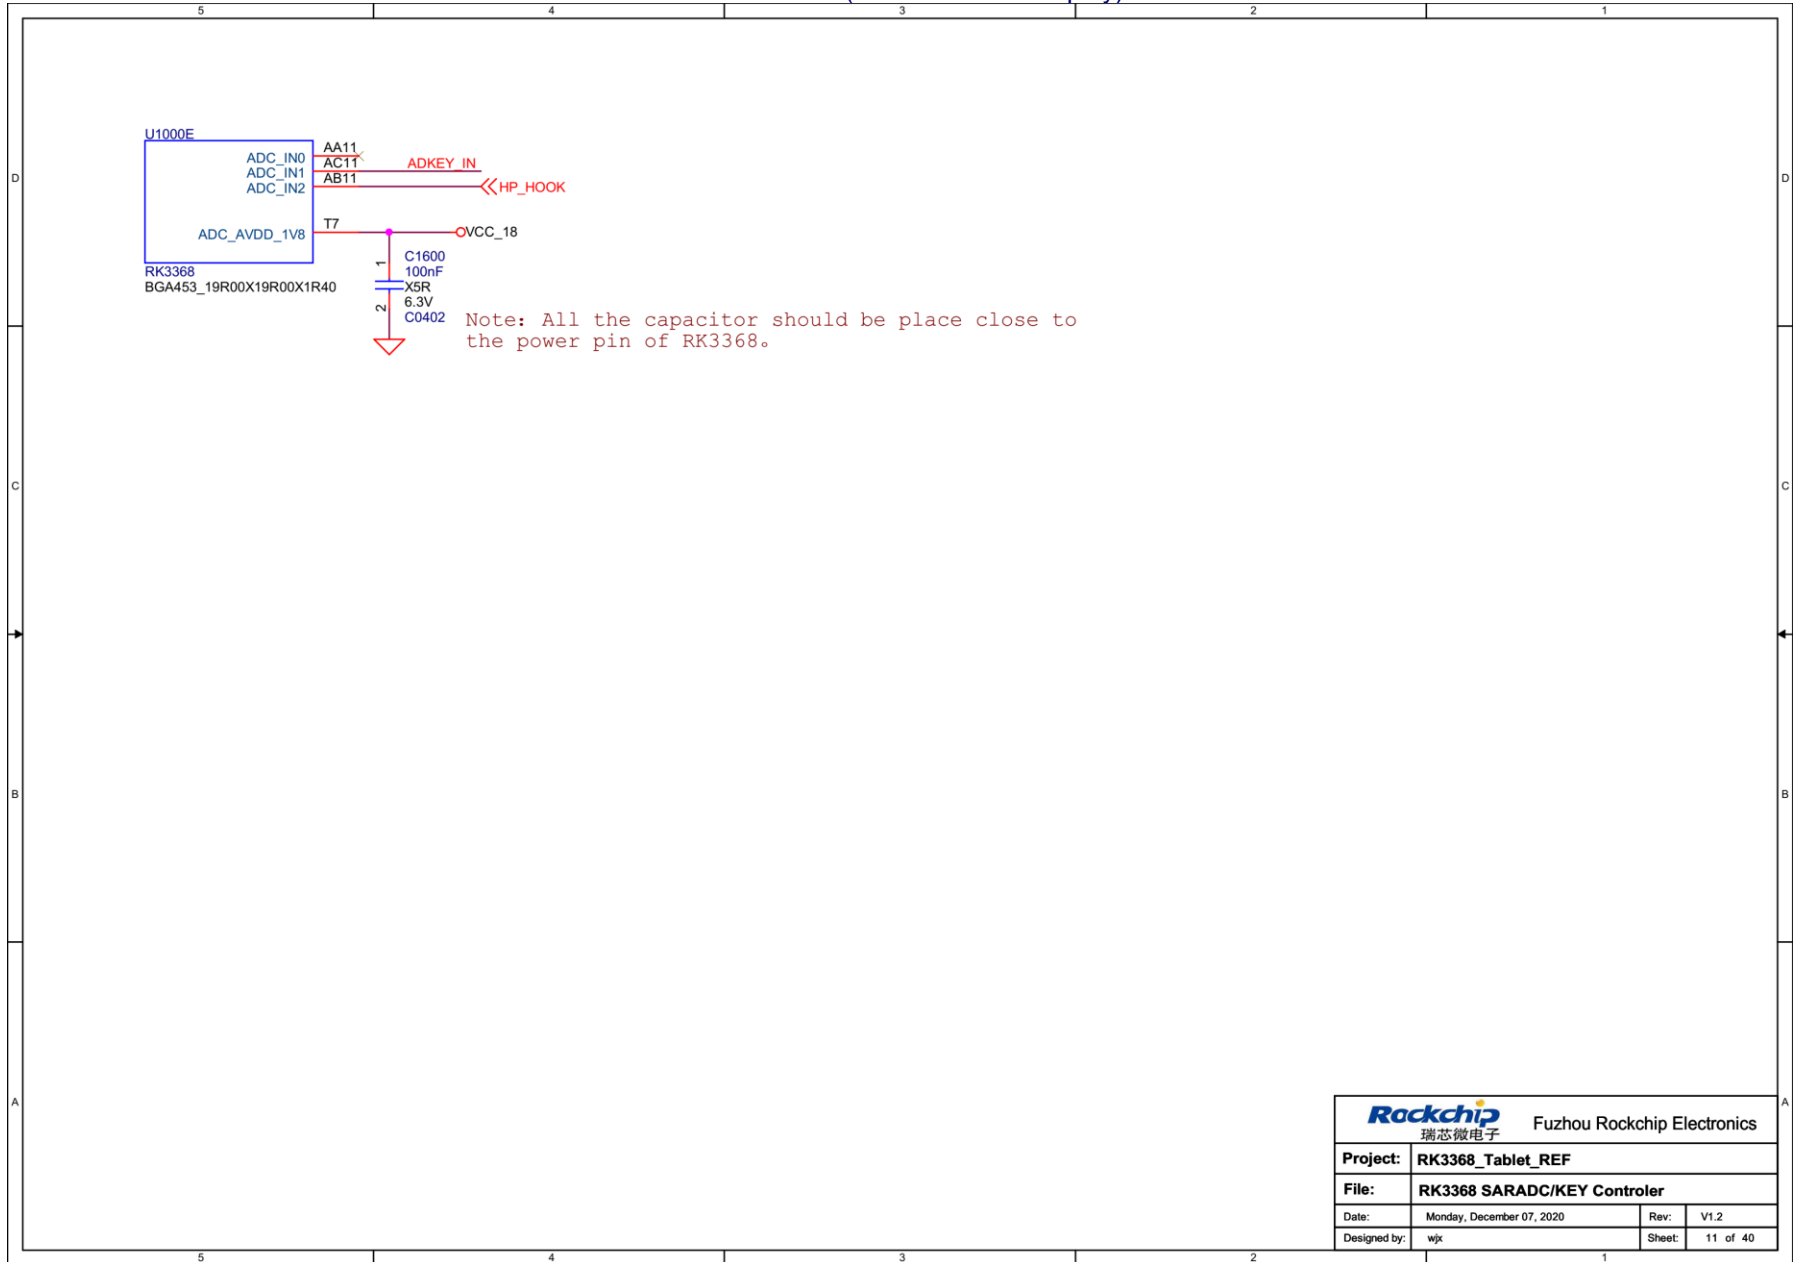

<b>Rackchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	RK3368 SARADC/KEY Controler		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	11 of 40


Control Panel (Multi-Function Display)

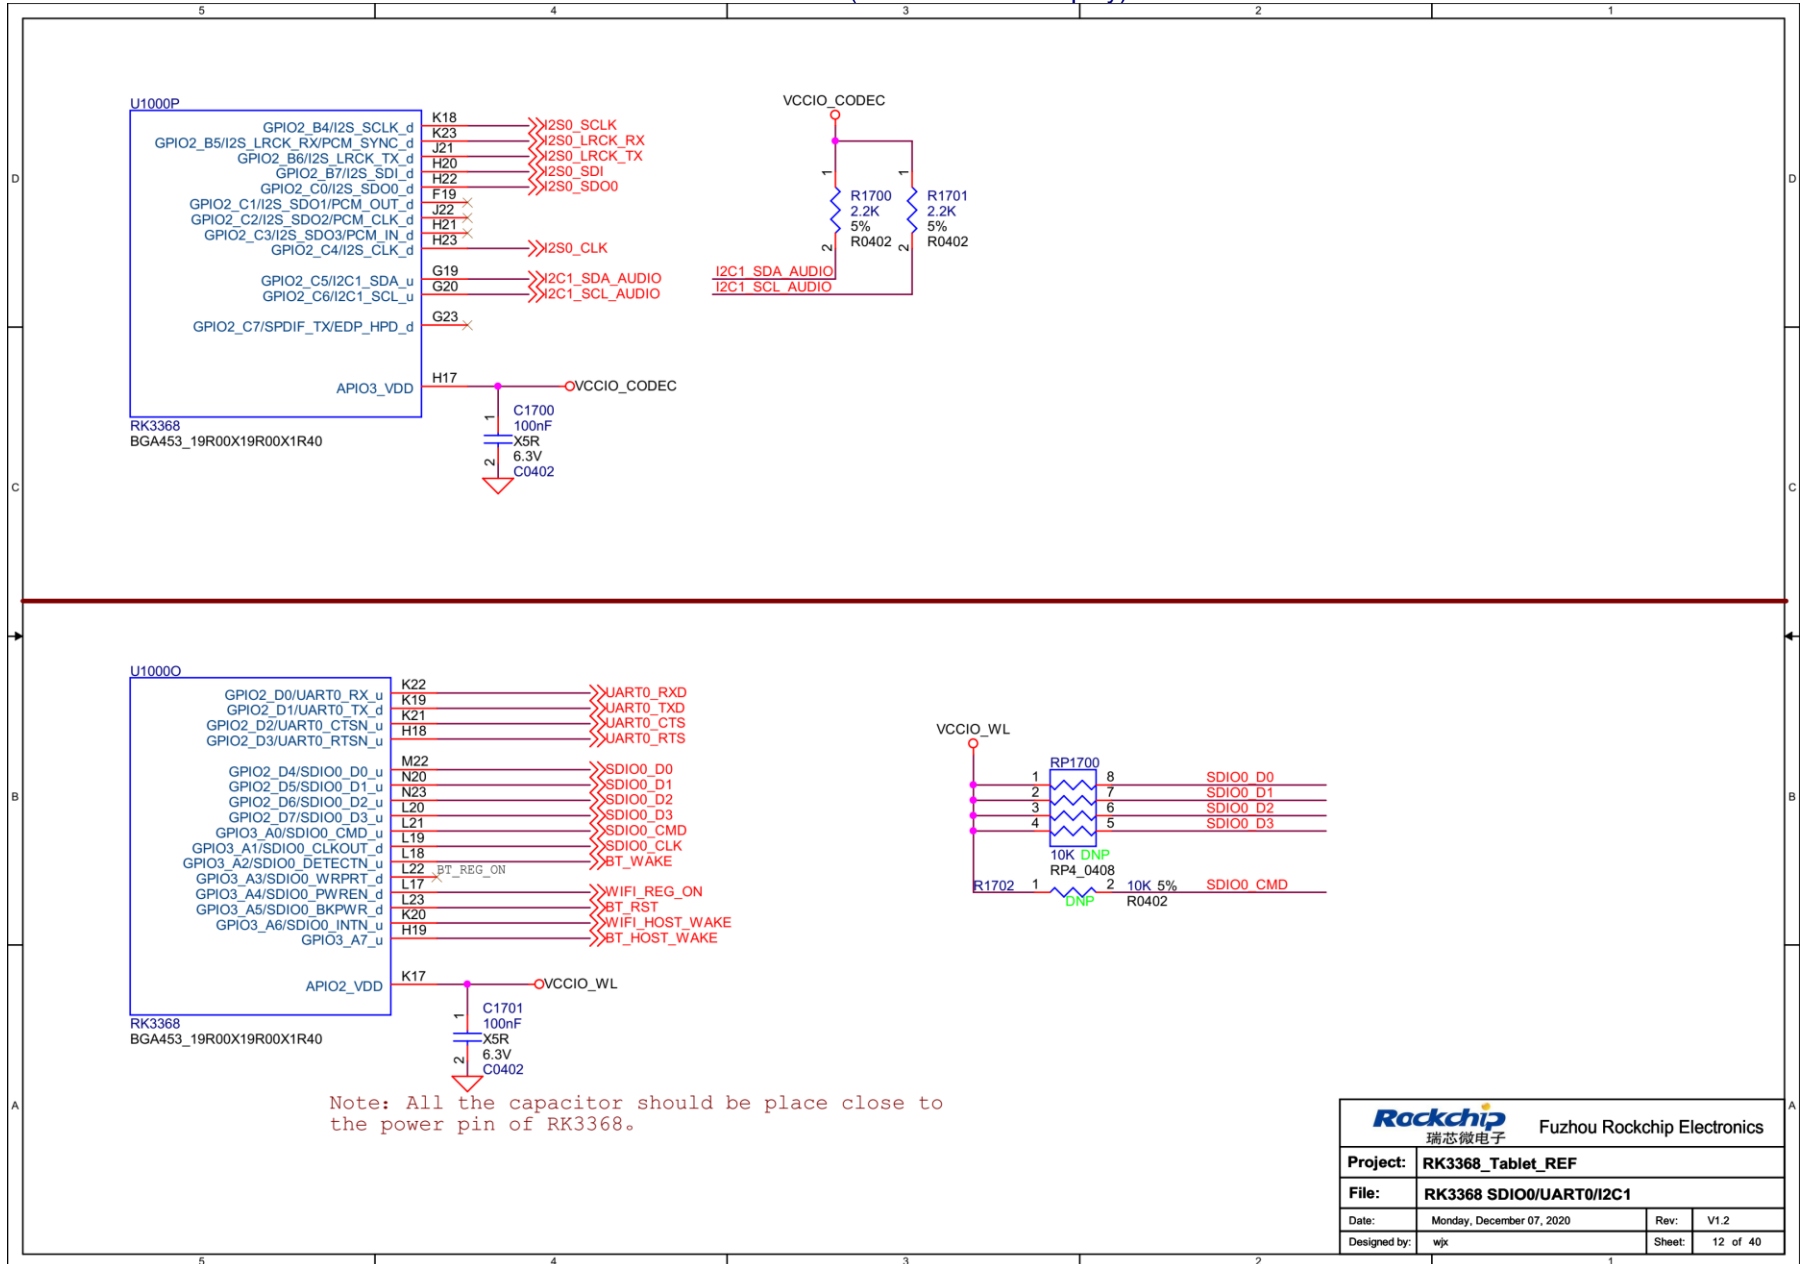

Note: All the capacitor should be place close to the power pin of RK3368.

<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	RK3368_SDIO0/UART0/I2C1		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	12 of 40

Control Panel (Multi-Function Display)

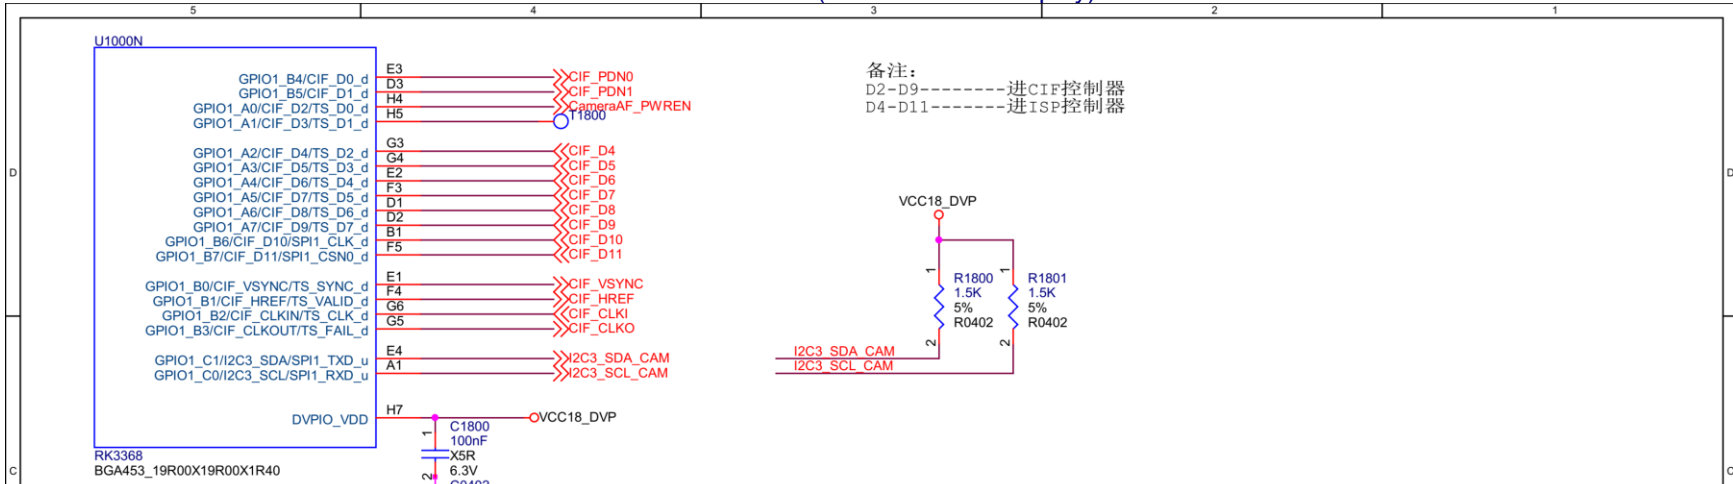

CIF Note: All the capacitor should be place close to the power pin of RK3368.


MIPI\_CSI



Note: All the capacitor should be place close to the power pin of RK3368.


<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	RK3368 DVP/MIPICSI Interface		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	13 of 40

Control Panel (Multi-Function Display)

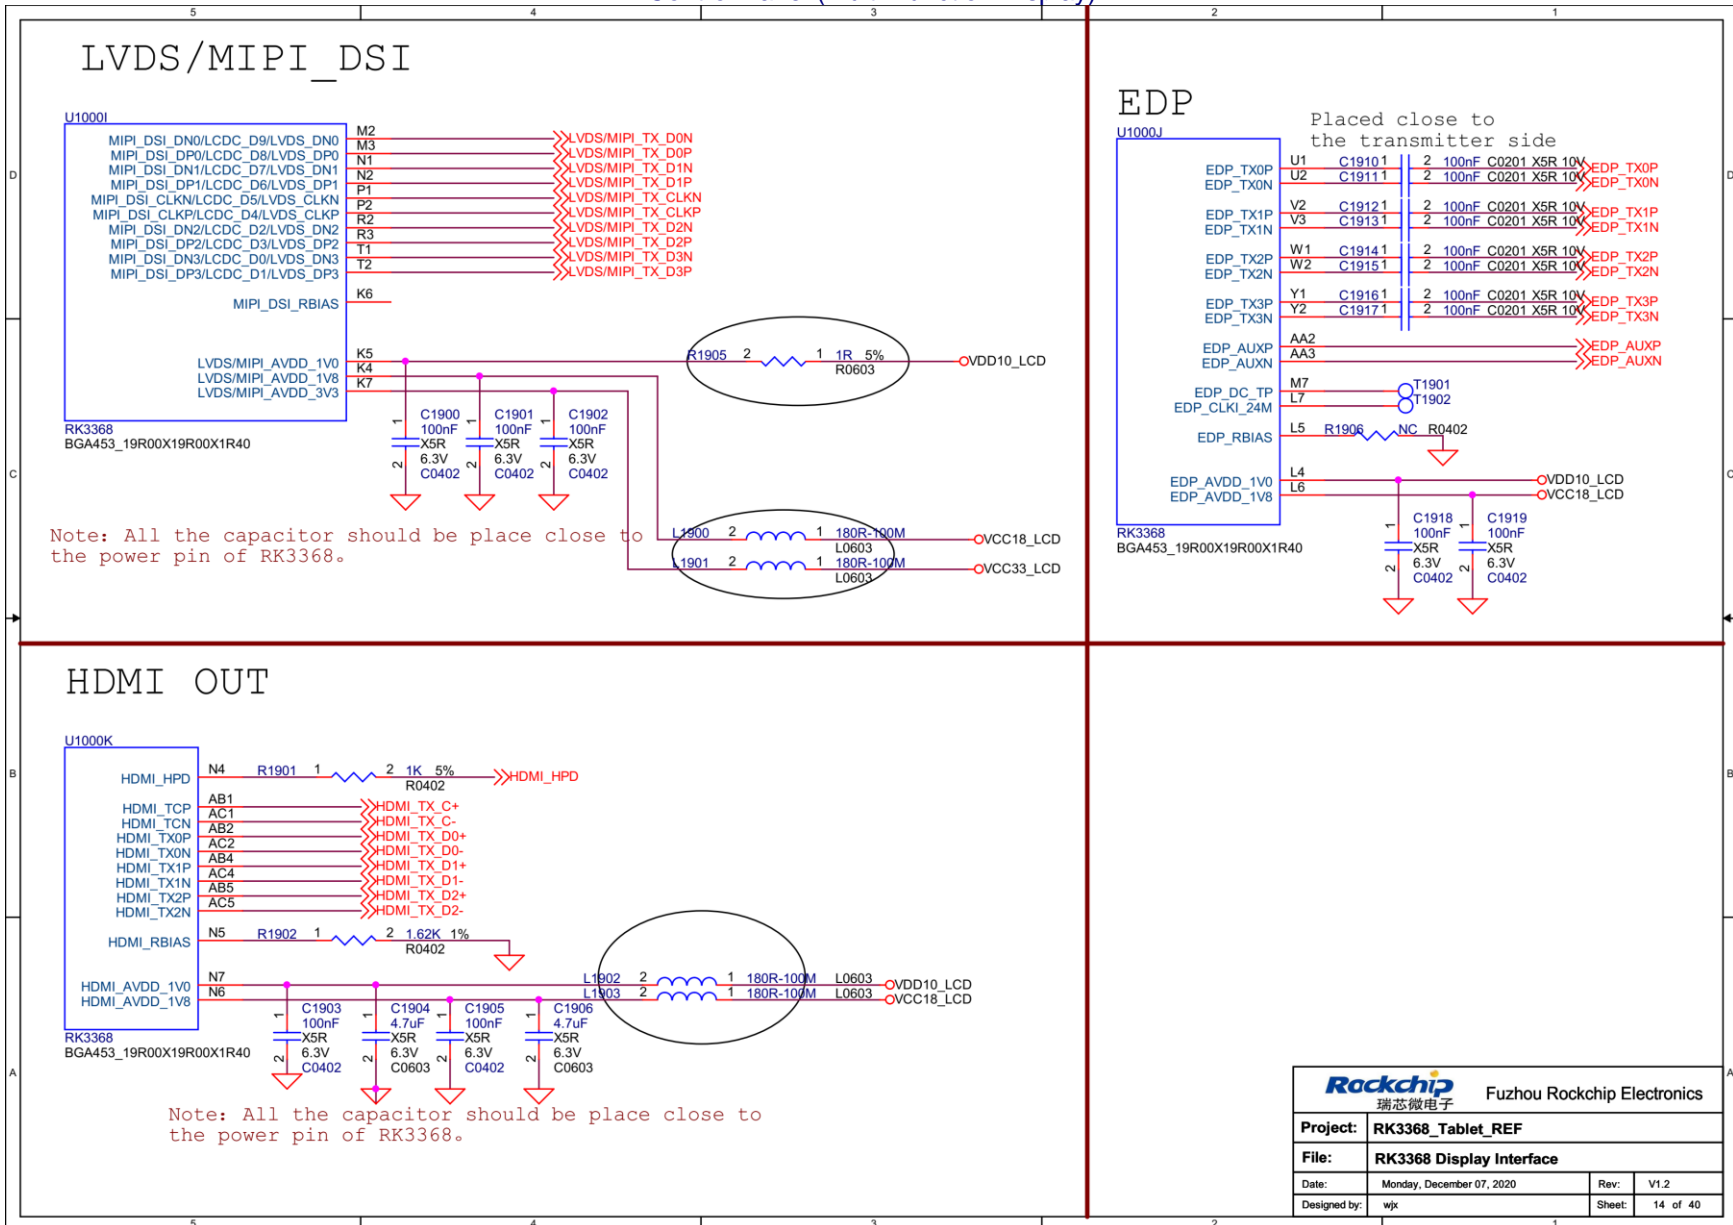


<b>Rackchip</b> 瑞芯微电子 Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF
<b>File:</b>	RK3368 Display Interface
<b>Date:</b>	Monday, December 07, 2020
<b>Designed by:</b>	wjx
<b>Rev:</b>	V1.2
<b>Sheet:</b>	14 of 40

Control Panel (Multi-Function Display)

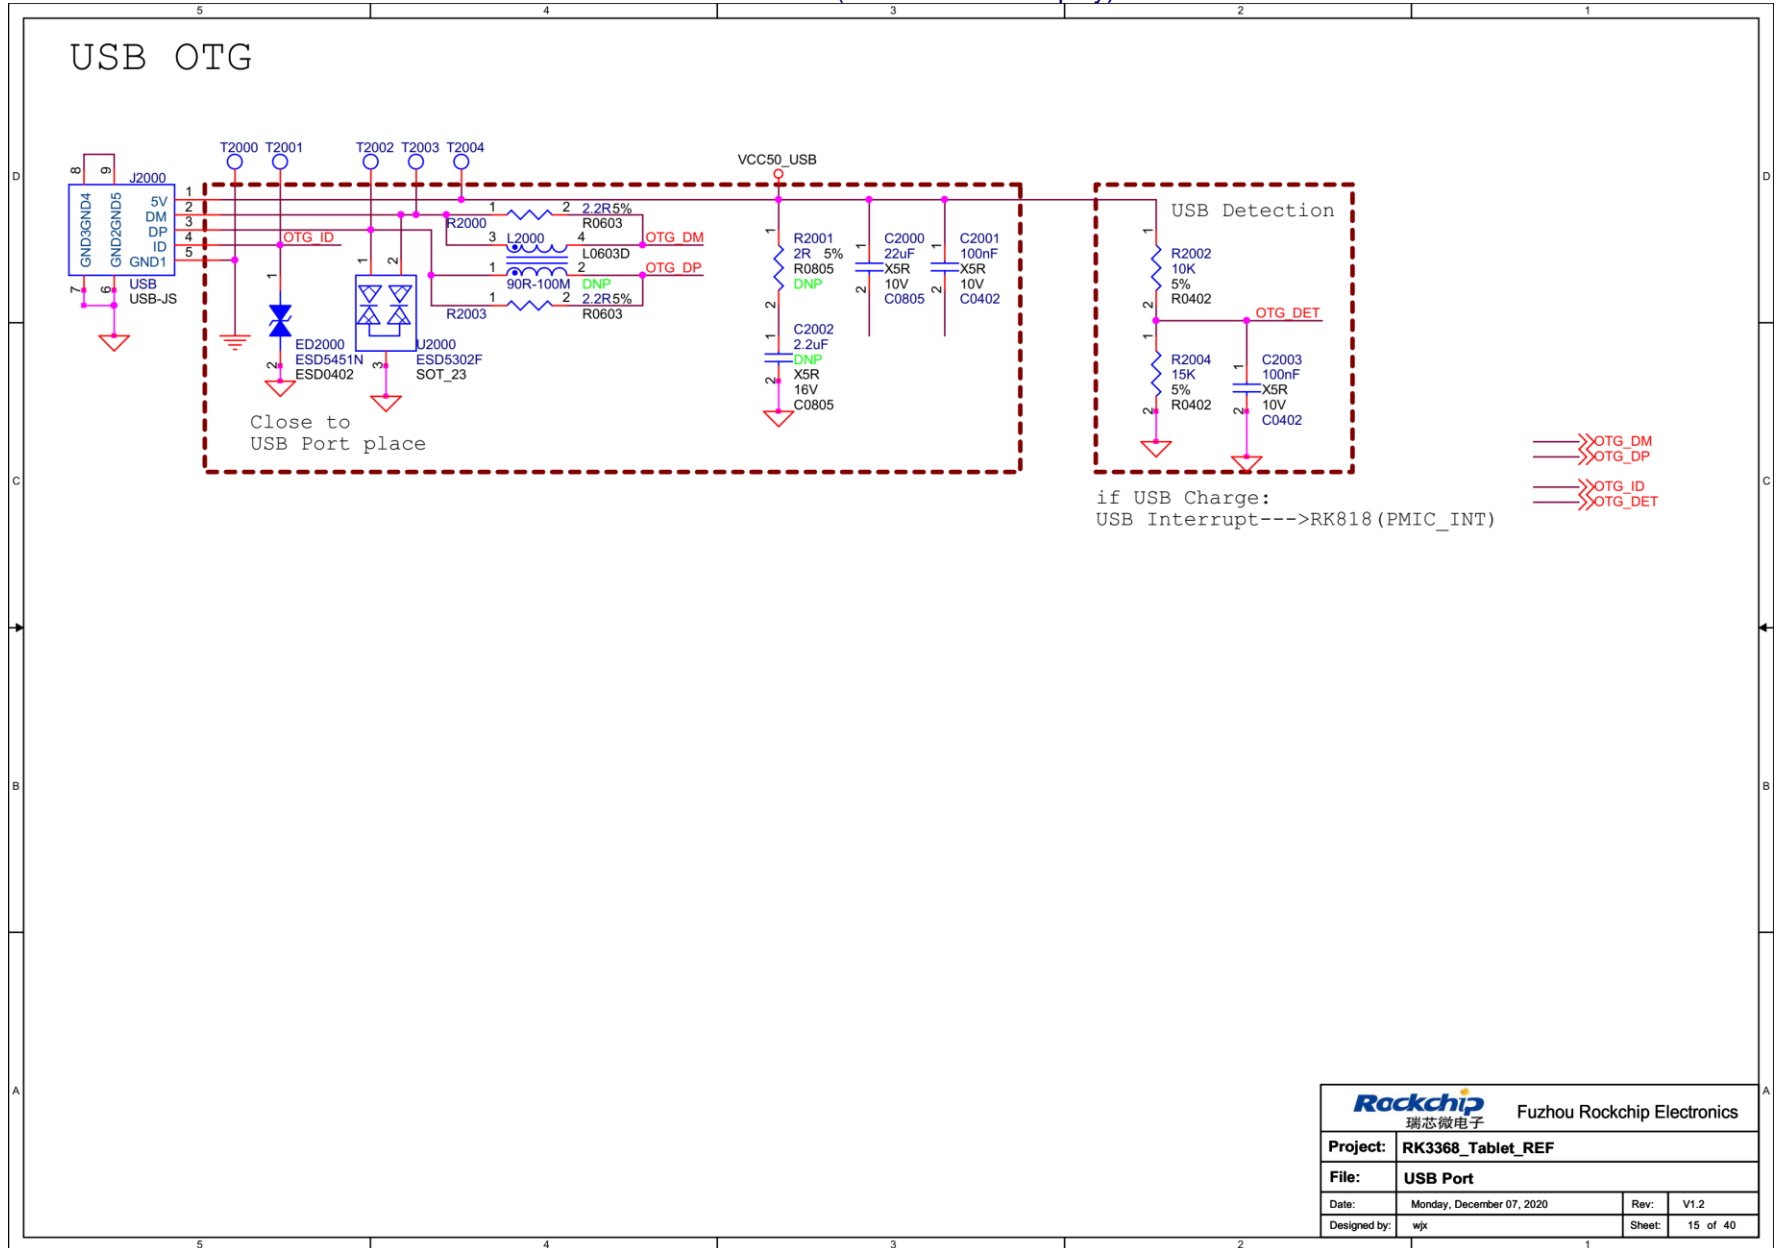





Control Panel (Multi-Function Display)

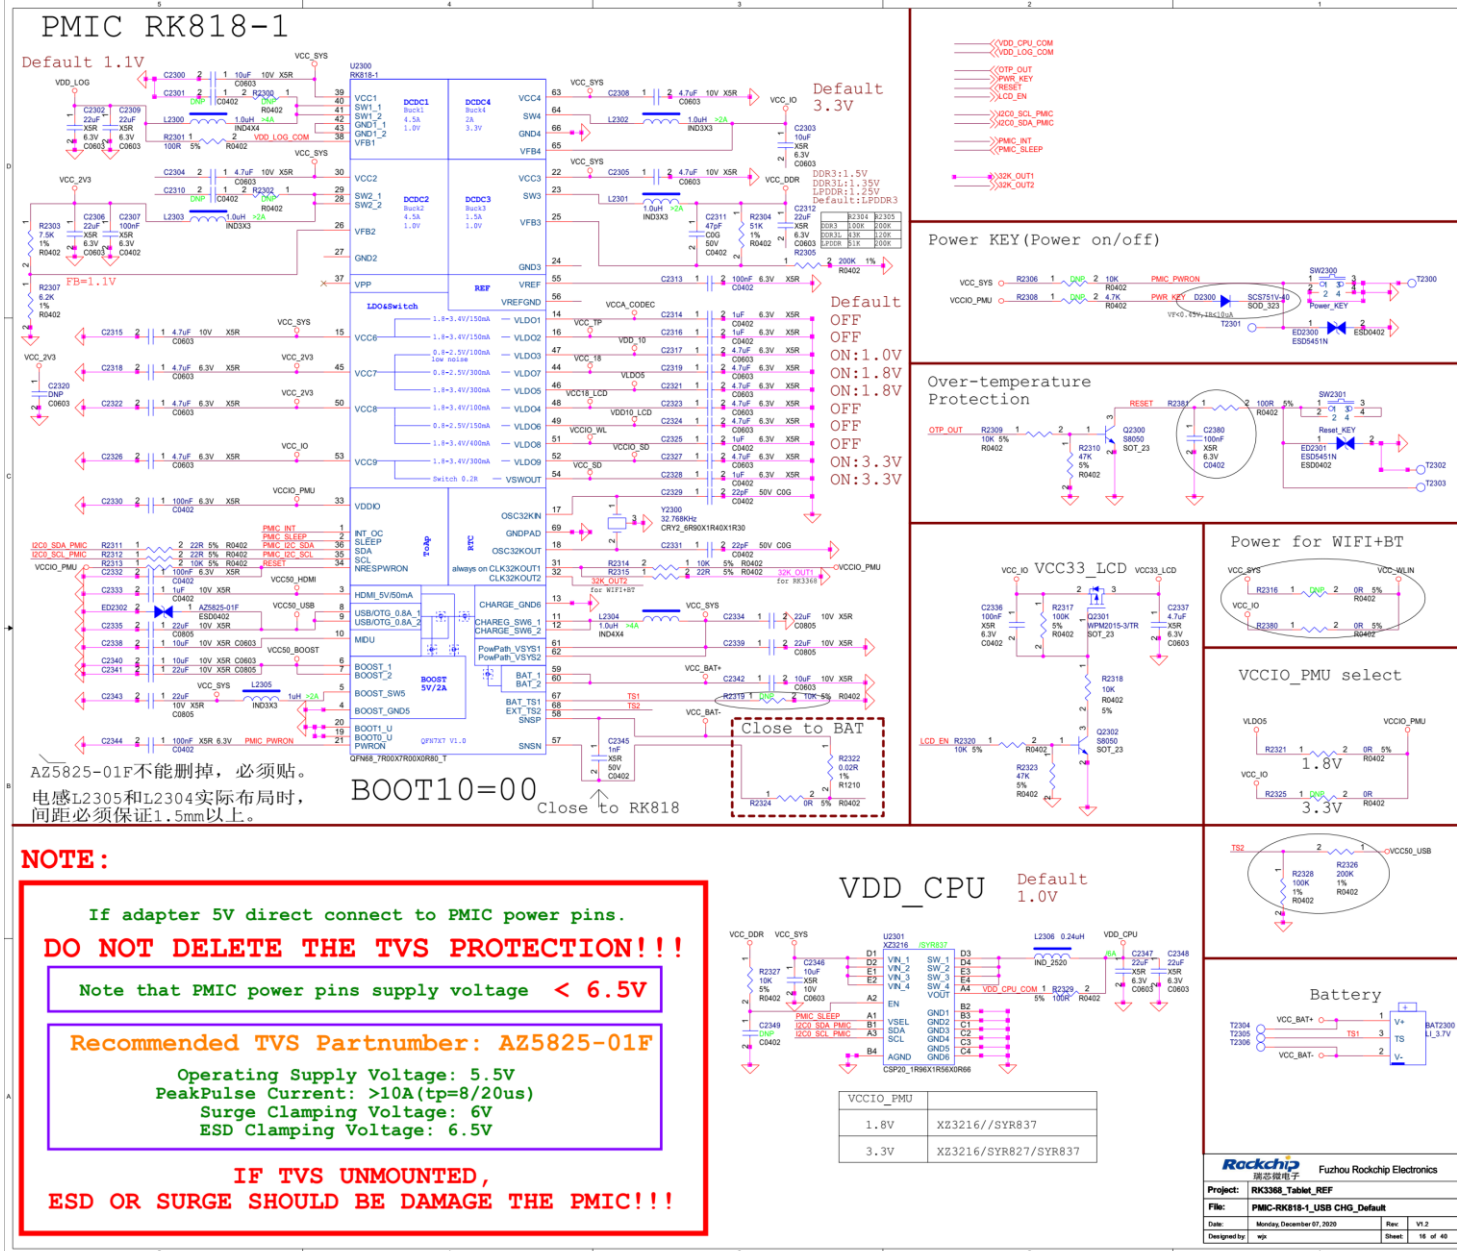

Control Panel (Multi-Function Display)

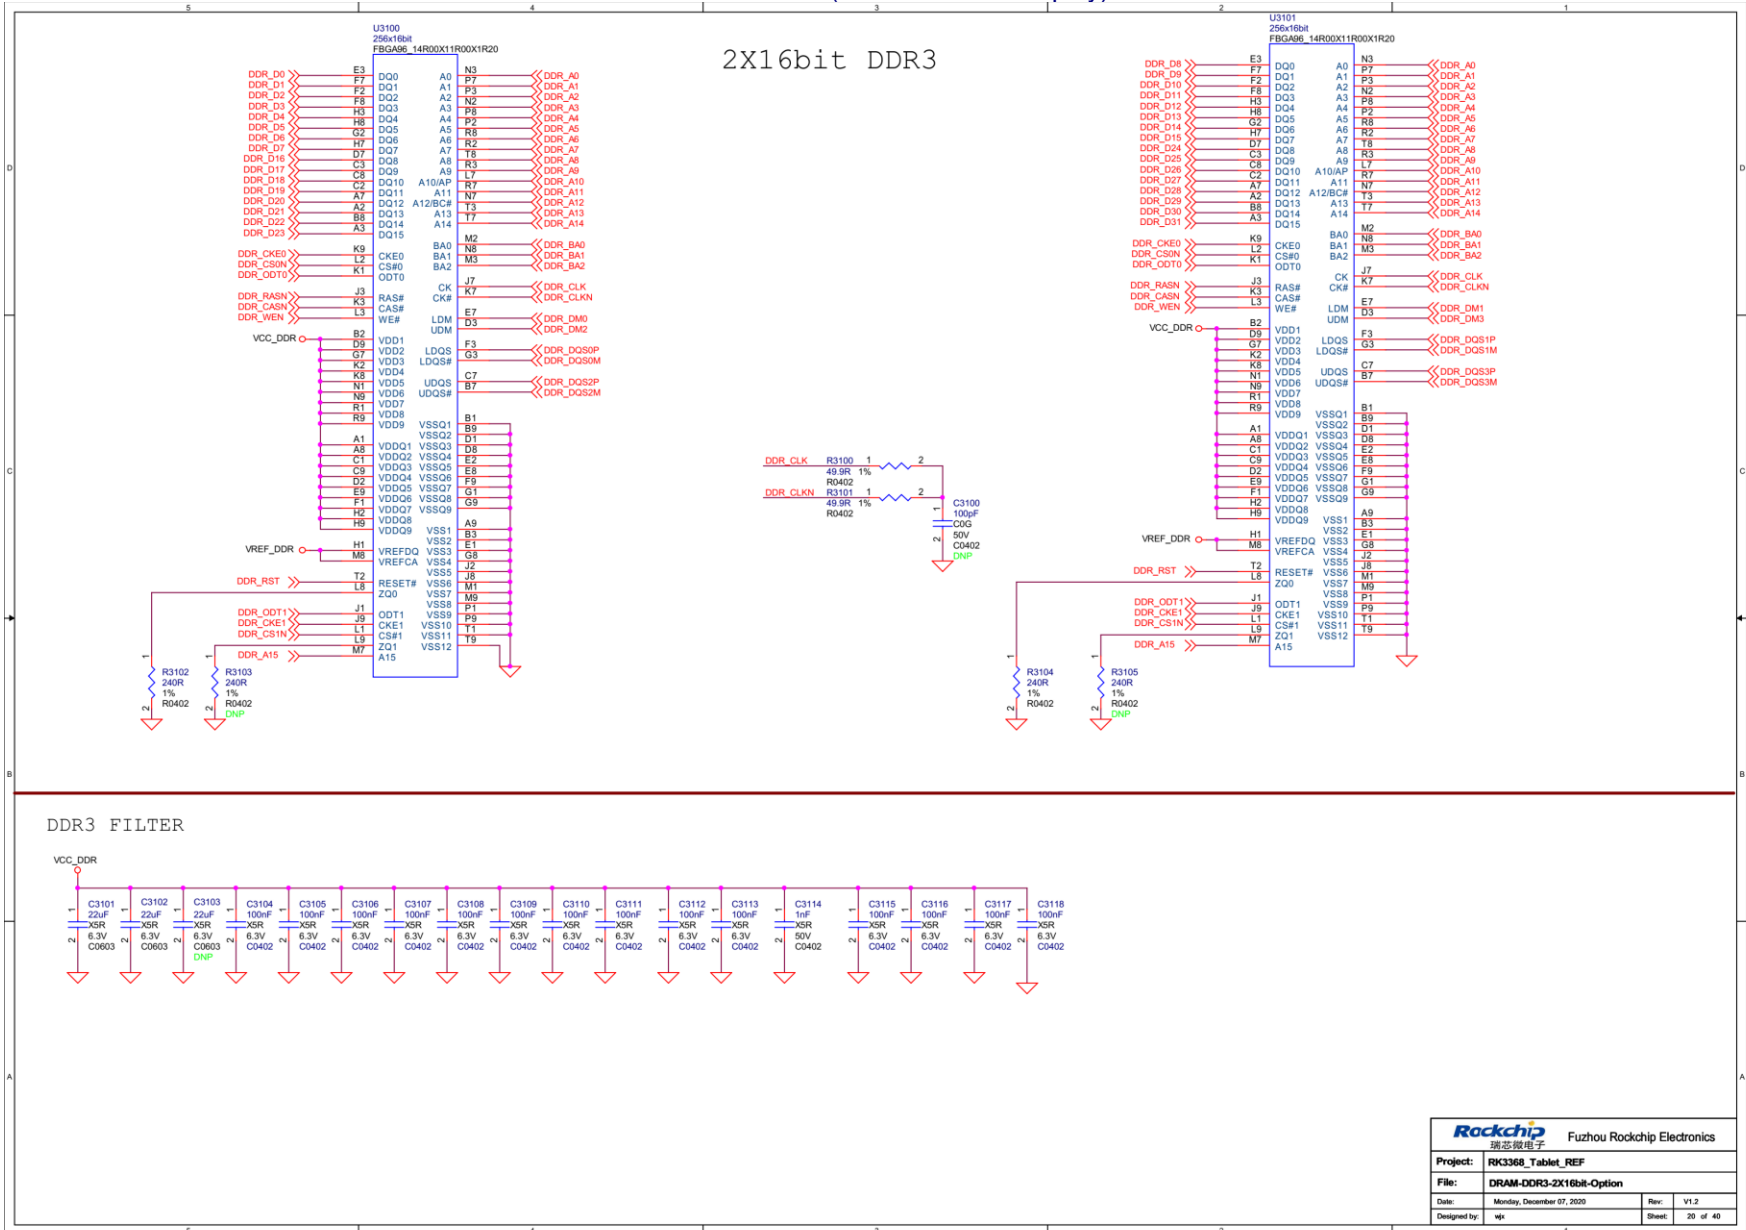

Control Panel (Multi-Function Display)

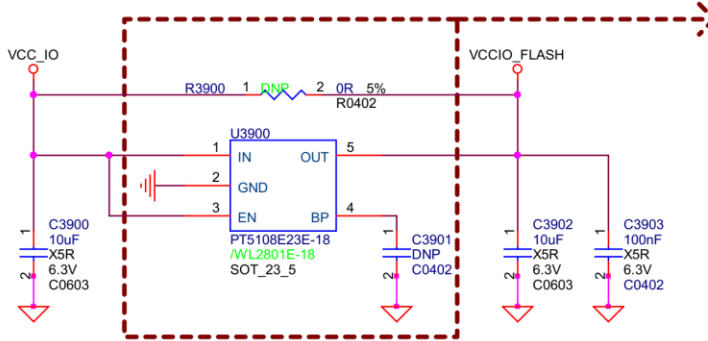

	Flash IO voltage		
eMMC (Default)	1.8V	U3900:PT5108E23E-18 R3900:DNP	Default
	3.3V	U3900:DNP R3900:0R	
Nand Flash	1.8V	U3900:PT5108E23E-18 R3900:DNP	
	3.3V	U3900:DNP R3900:0R	

Note:  
Close to eMMC or Nand Flash



Note:  
Reserve PAD for Nand Flash Update.


Note:  
默认建议使用1.8V IO eMMC  
如果使用Nand FLASH, 默认是3.3V IO  
如果使用的Nand FLASH支持1.8V IO, 要注意修改成1.8V IO.

FLASH\_VOL\_SEL管脚状态 (IO驱动设置) 也要配合修改。  
在14.RK3368 FLASH/SDMMC Controller页里。

U3900替换成其它型号的LDO,  
需评估一下使用的eMMC颗粒的VCCQ最大峰值电流,  
LDO的最大电流是否满足其要求,  
如果对功耗要求比较高, 建议换成DC/DC  
给VCCIO\_FLASH供电。

瑞芯微电子 Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF
<b>File:</b>	Flash-Power manage
<b>Date:</b>	Monday, December 07, 2020
<b>Designed by:</b>	wjx
<b>Rev:</b>	V1.2
<b>Sheet:</b>	22 of 40




Control Panel (Multi-Function Display)

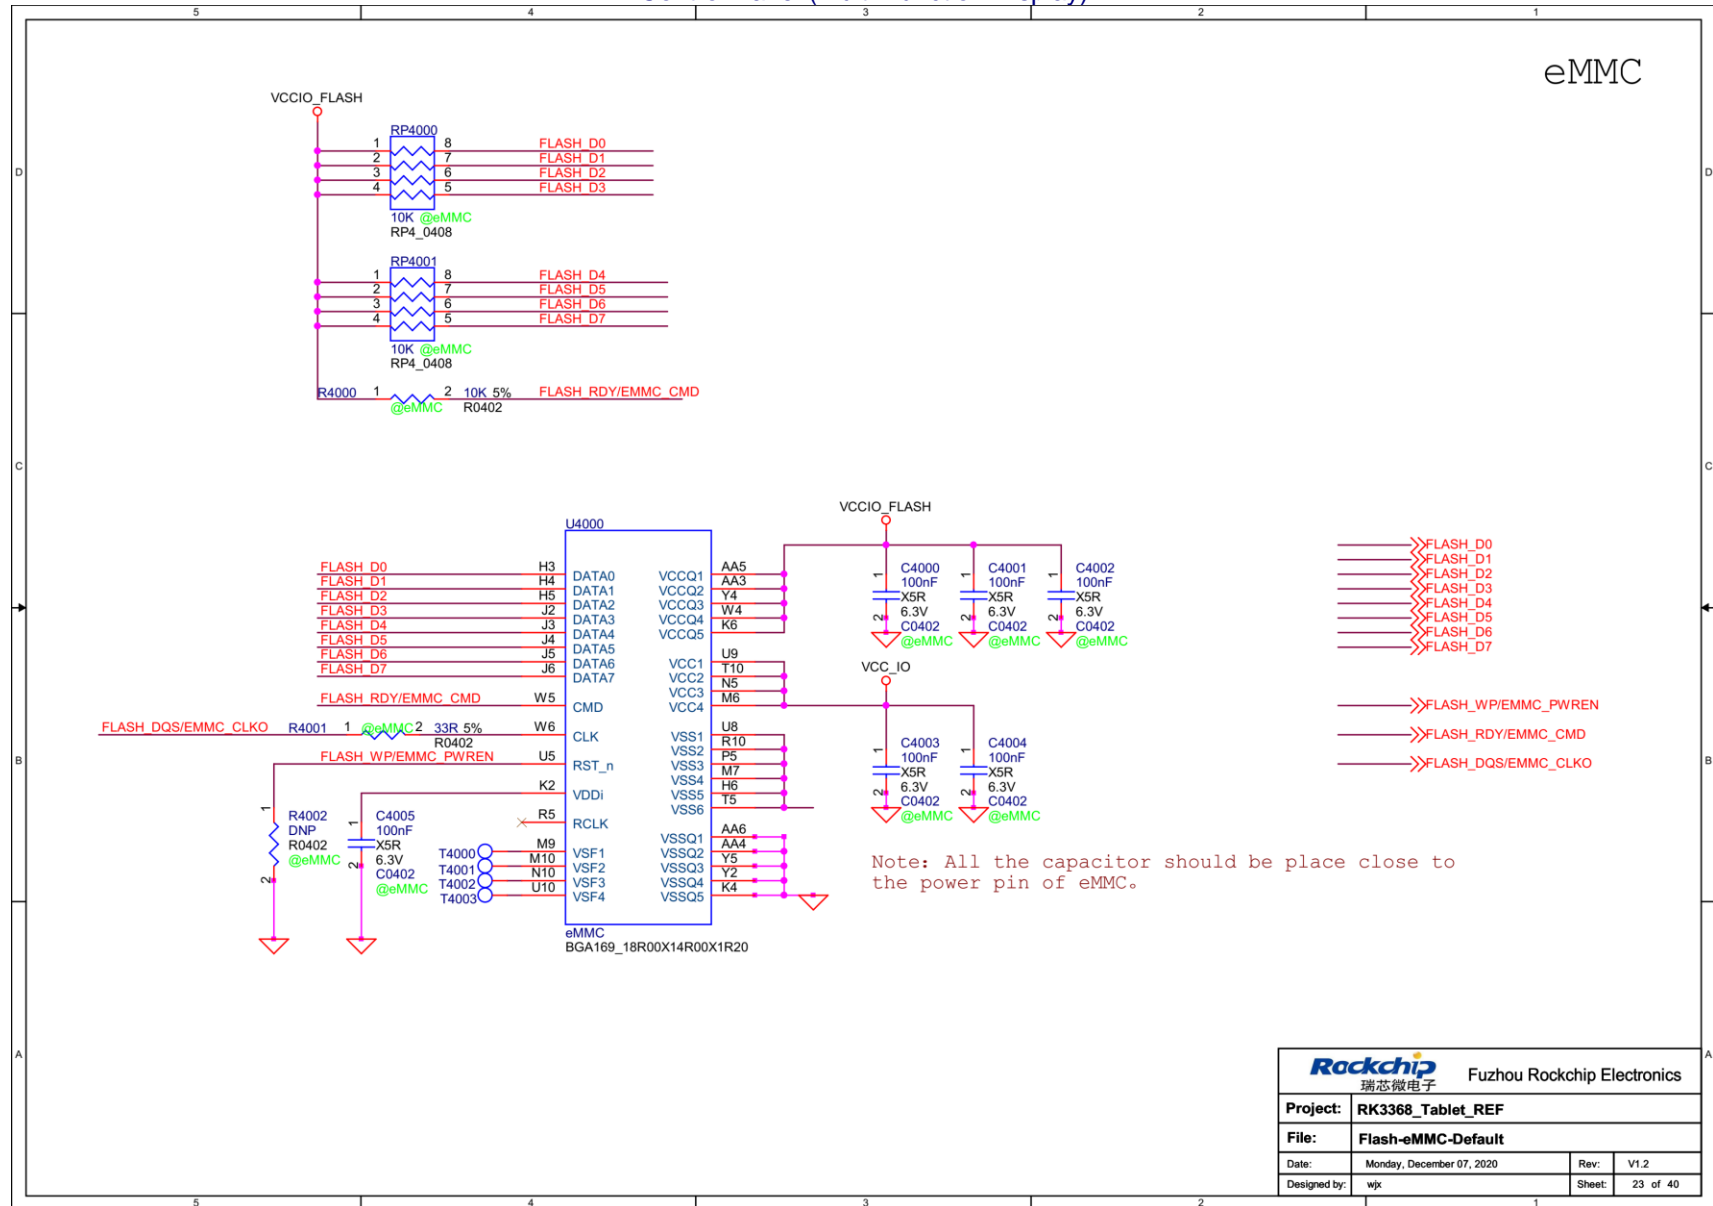

		Fuzhou Rockchip Electronics 瑞芯微电子	
<b>Project:</b> RK3368_Tablet_REF			
<b>File:</b> Flash-eMMC-Default			
Date:	Monday, December 07, 2020	Rev:	V1.2
Designed by:	wjx	Sheet:	23 of 40


Control Panel (Multi-Function Display)

Carmera (MIPI CSI)  
MAX 8MP

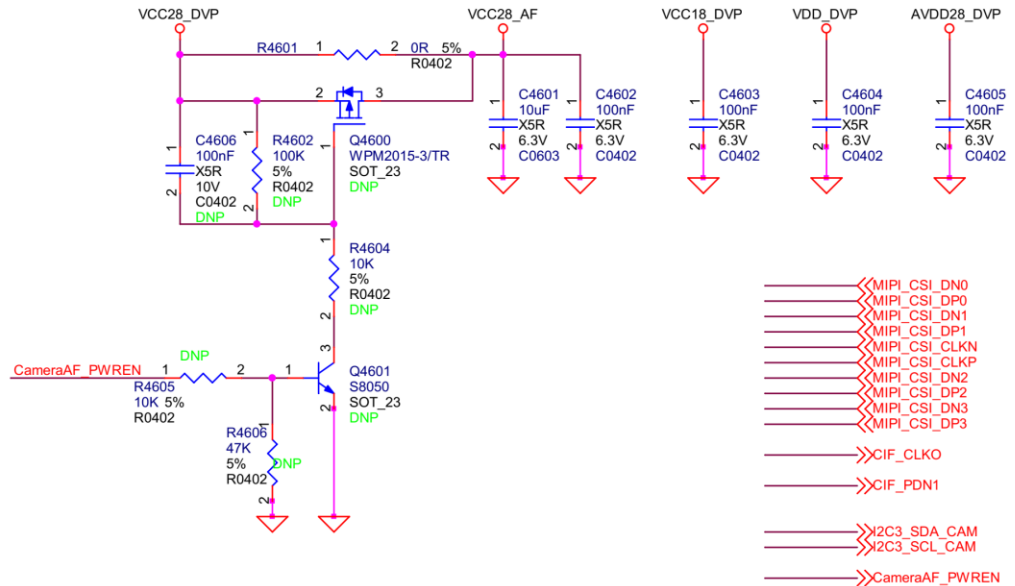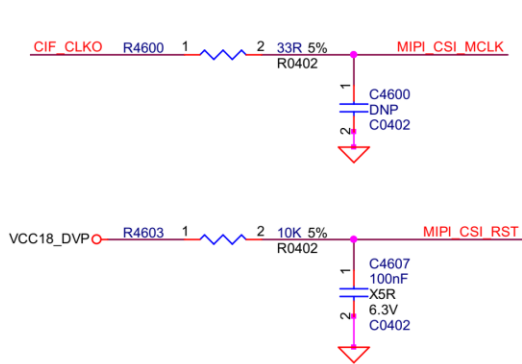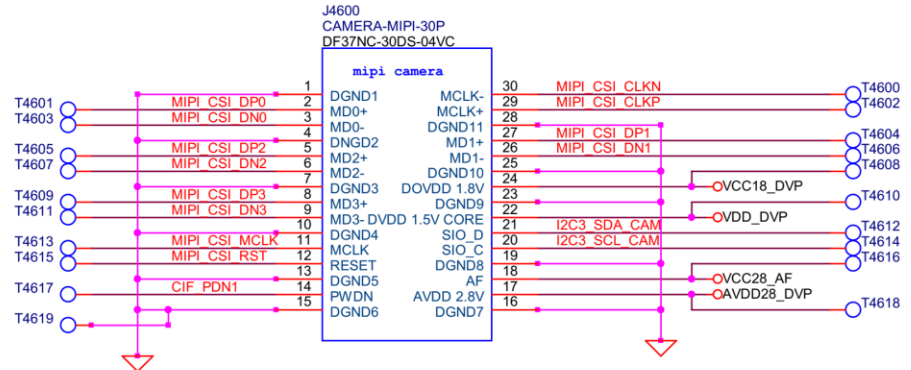



<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	Camera-MIPI CSI		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	26 of 40

Control Panel (Multi-Function Display)

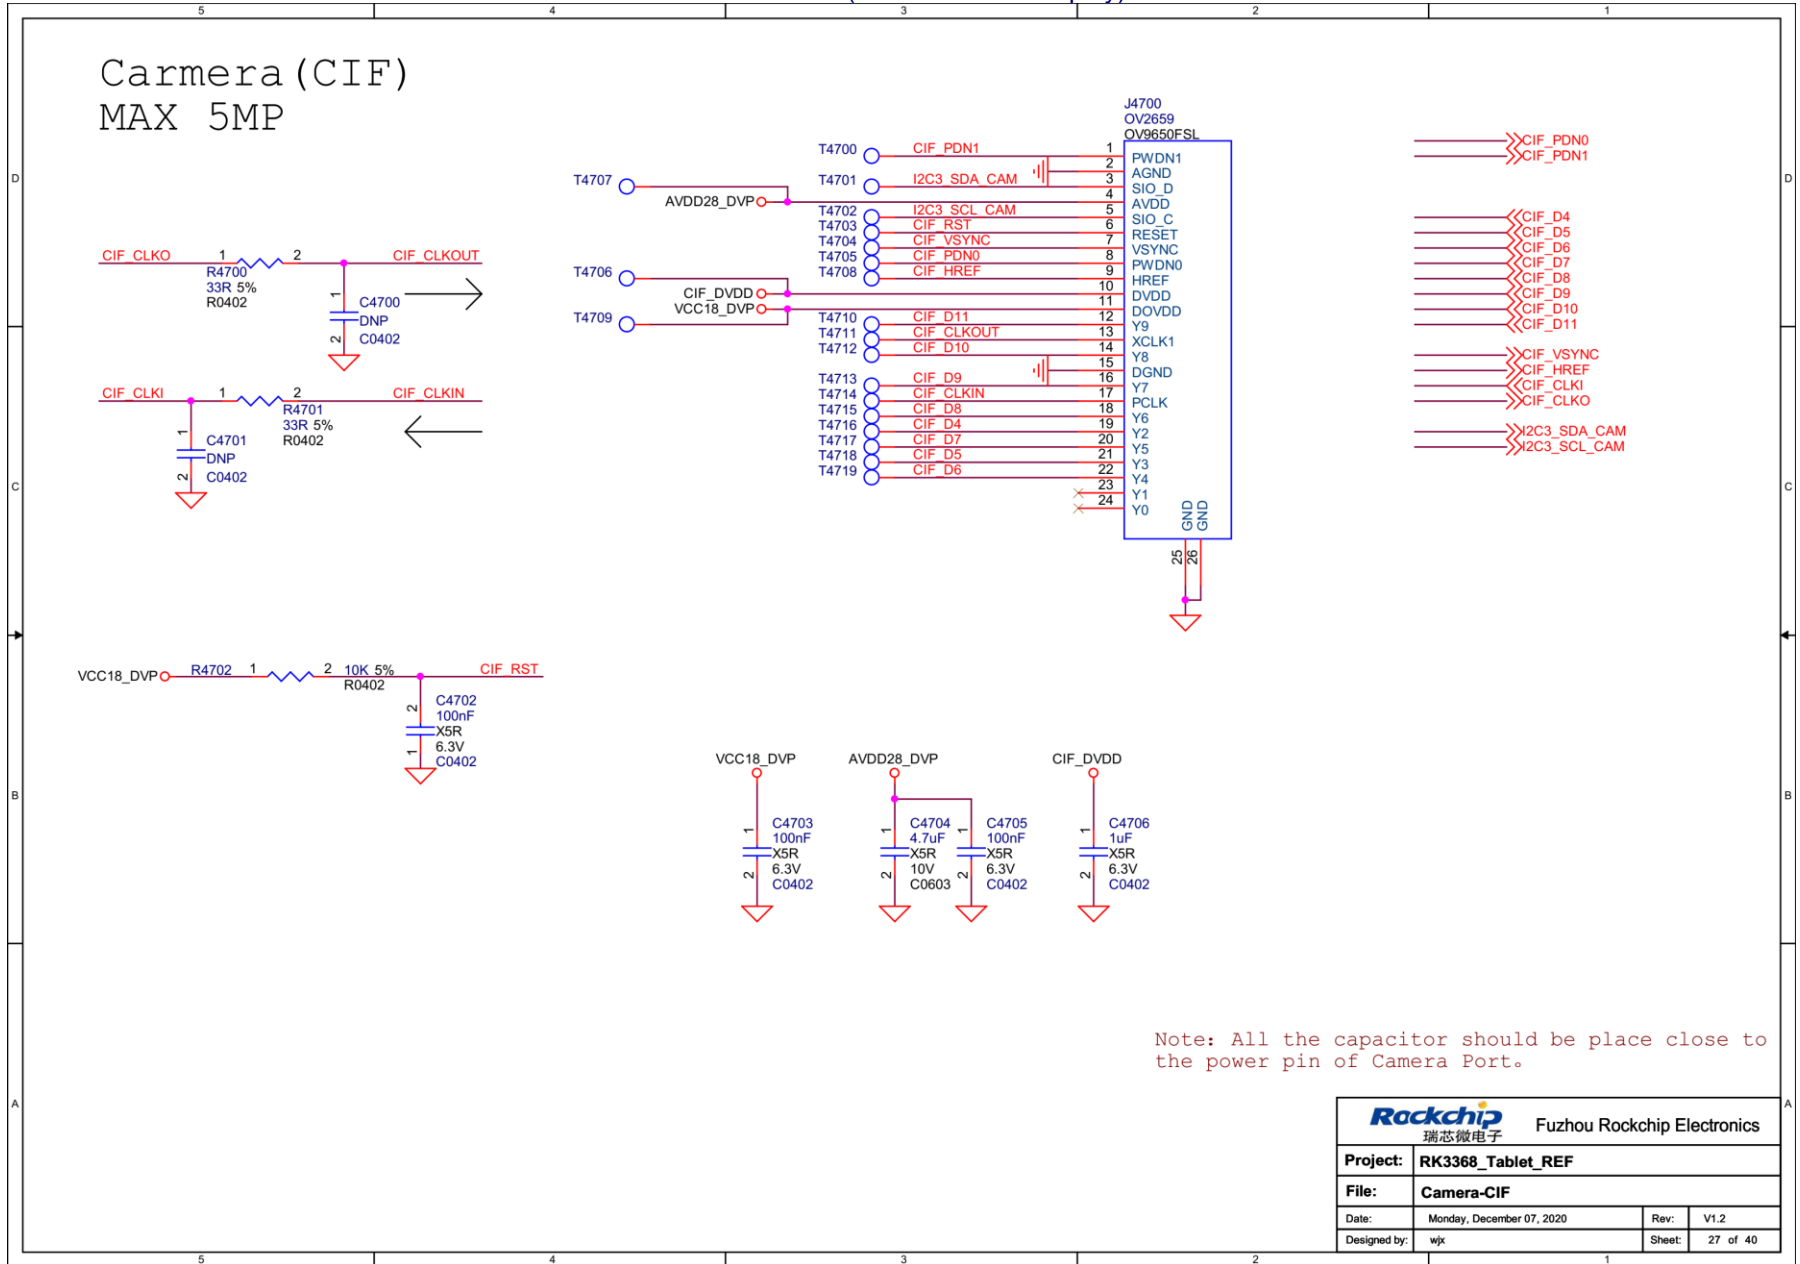


Control Panel (Multi-Function Display)

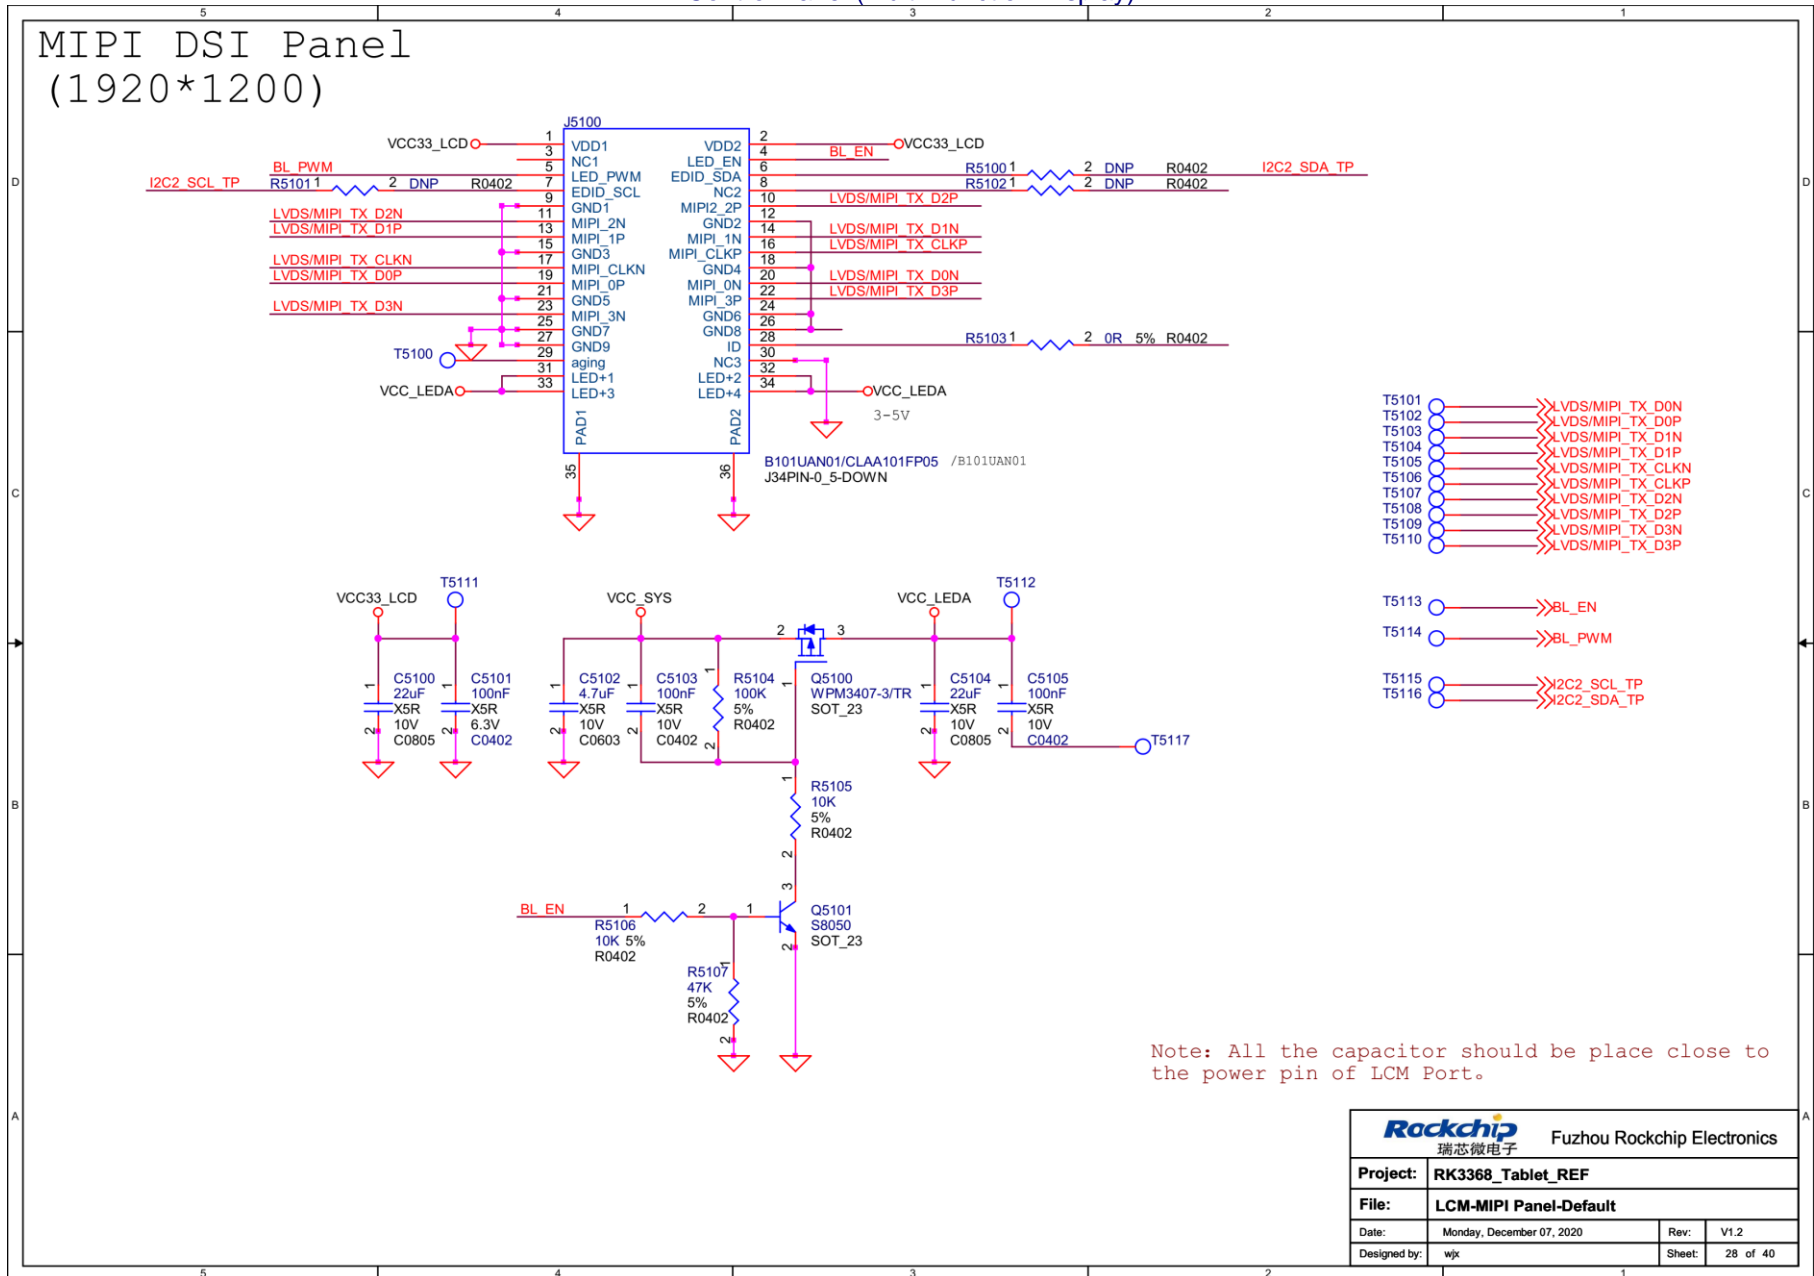

		Fuzhou Rockchip Electronics 瑞芯微电子	
<b>Project:</b> RK3368_Tablet_REF			
<b>File:</b> LCM-MIPI Panel-Default			
<b>Date:</b> Monday, December 07, 2020		<b>Rev:</b> V1.2	
<b>Designed by:</b> wxj		<b>Sheet:</b> 28 of 40	





Control Panel (Multi-Function Display)

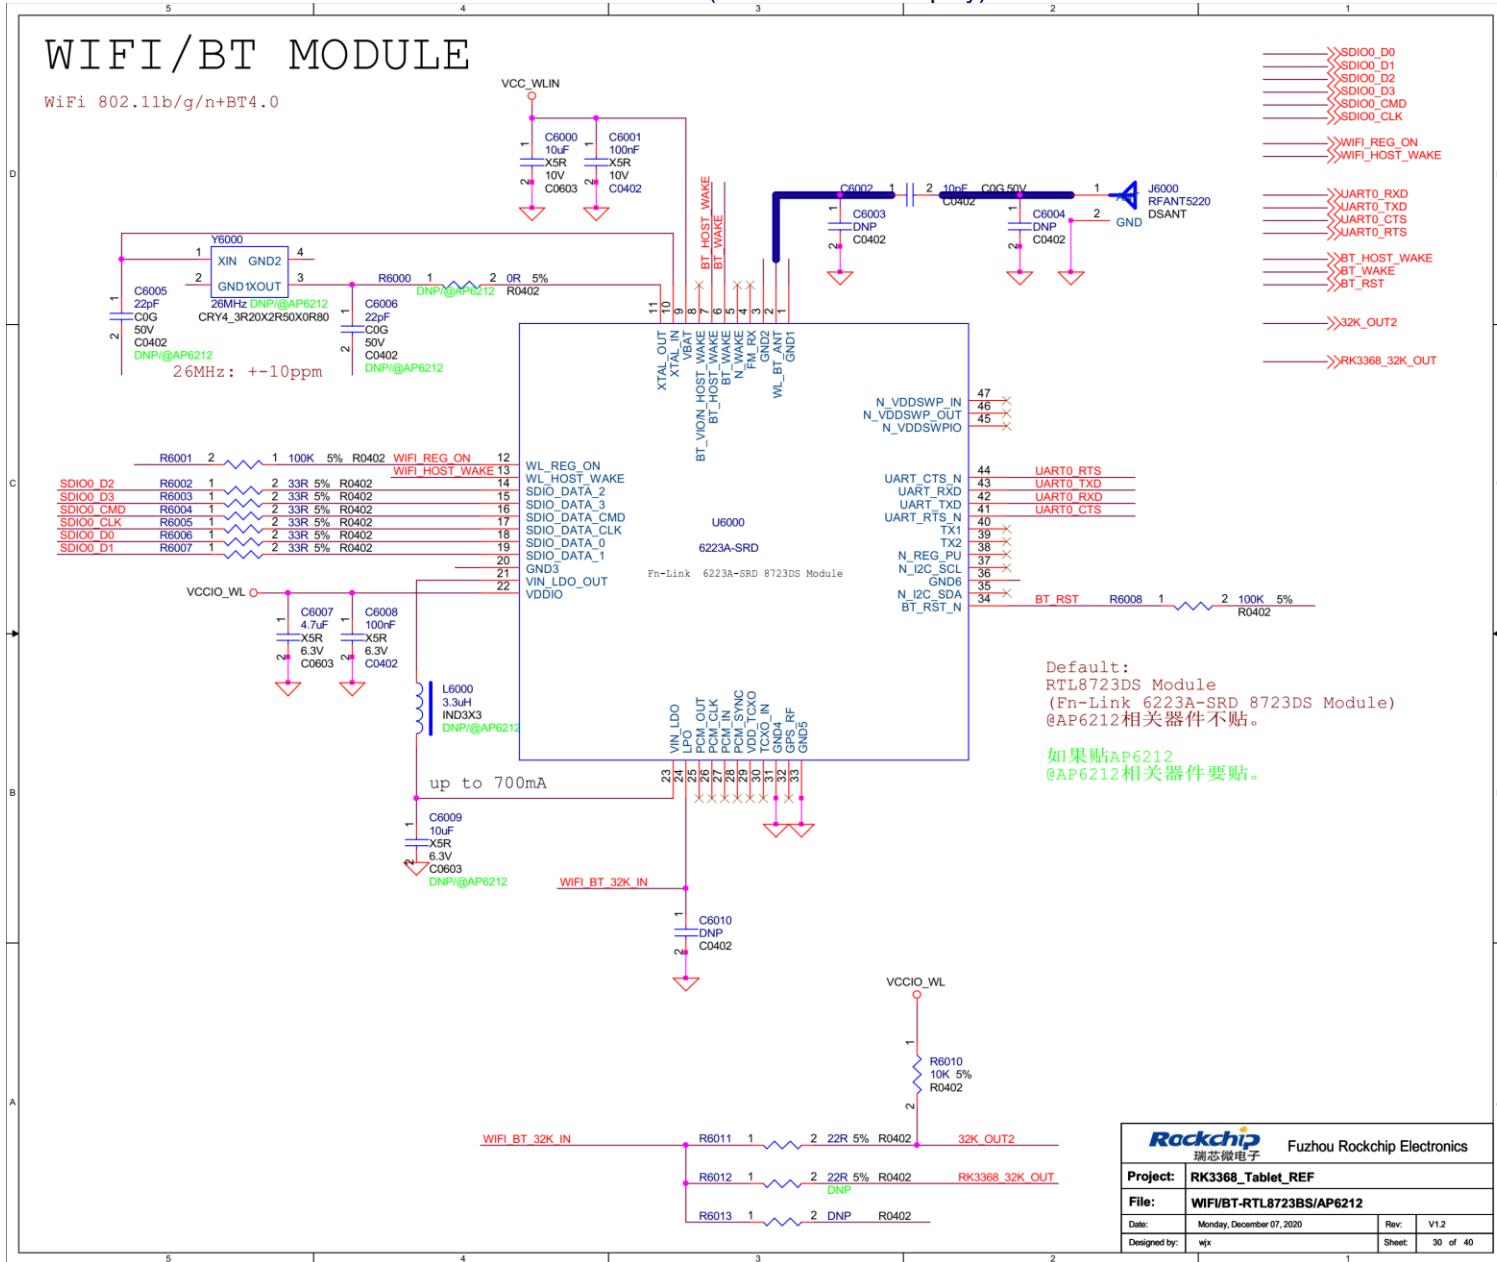

<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	WIFI/BT-RTL8723BS/AP6212		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	30 of 40




Control Panel (Multi-Function Display)

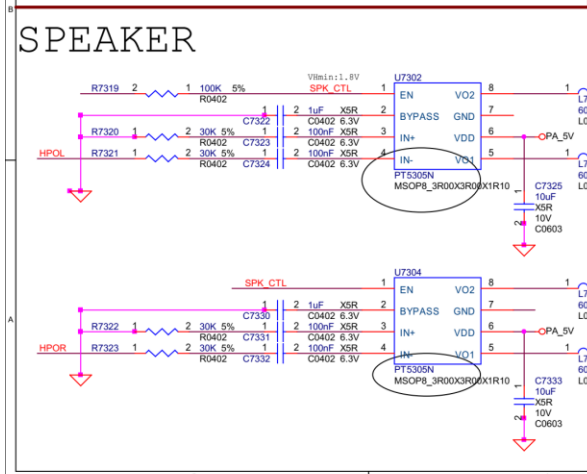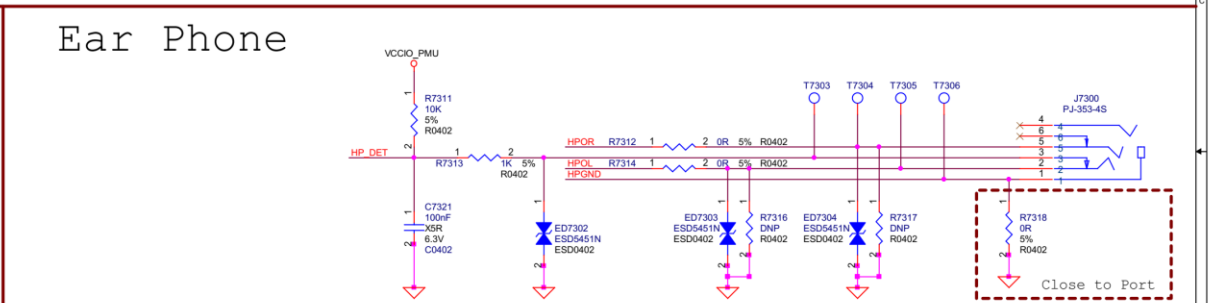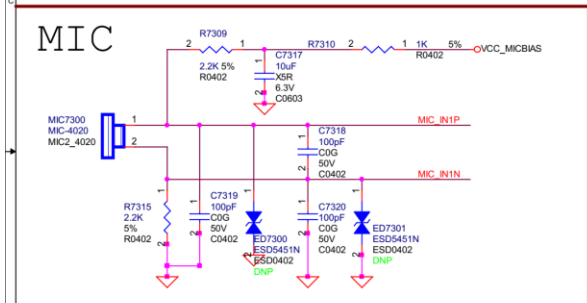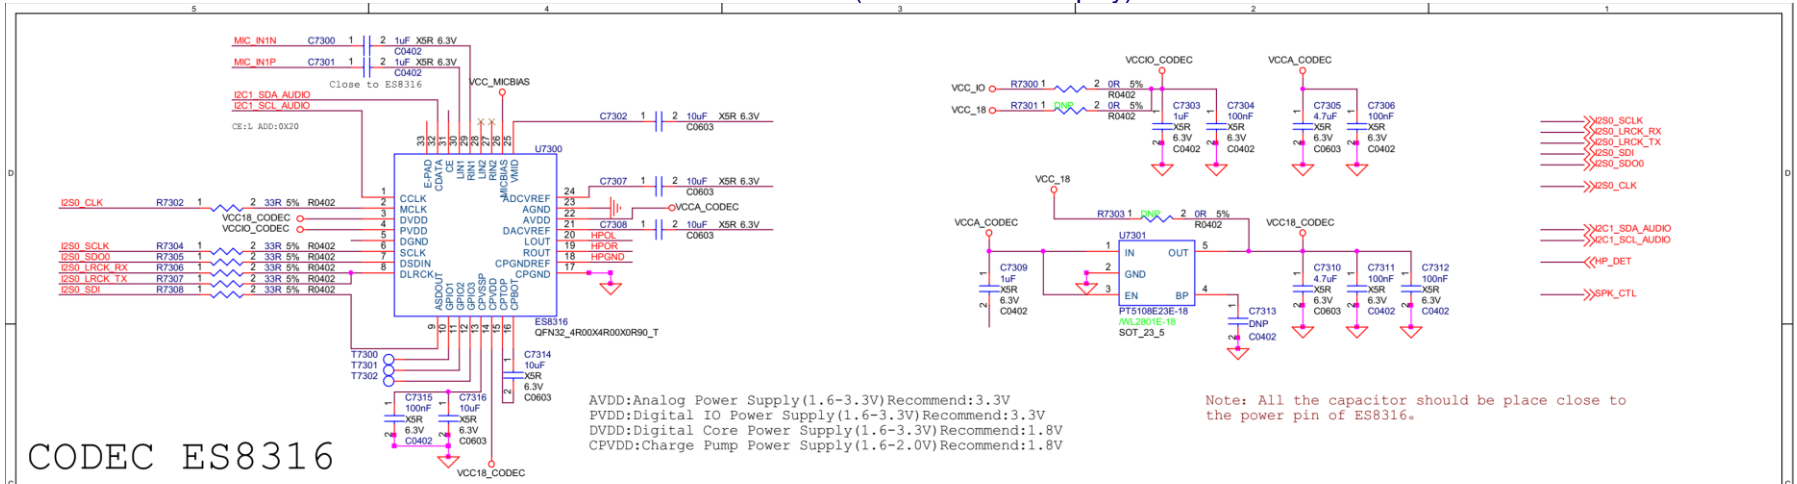


<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
Project: RK3368_Tablet_REF			
File: Audio Codec-ES8316-Default			
Date: Monday, December 07, 2020	Rev: V1.2		
Designed by: wjx	Sheet: 33 of 40		

Control Panel (Multi-Function Display)

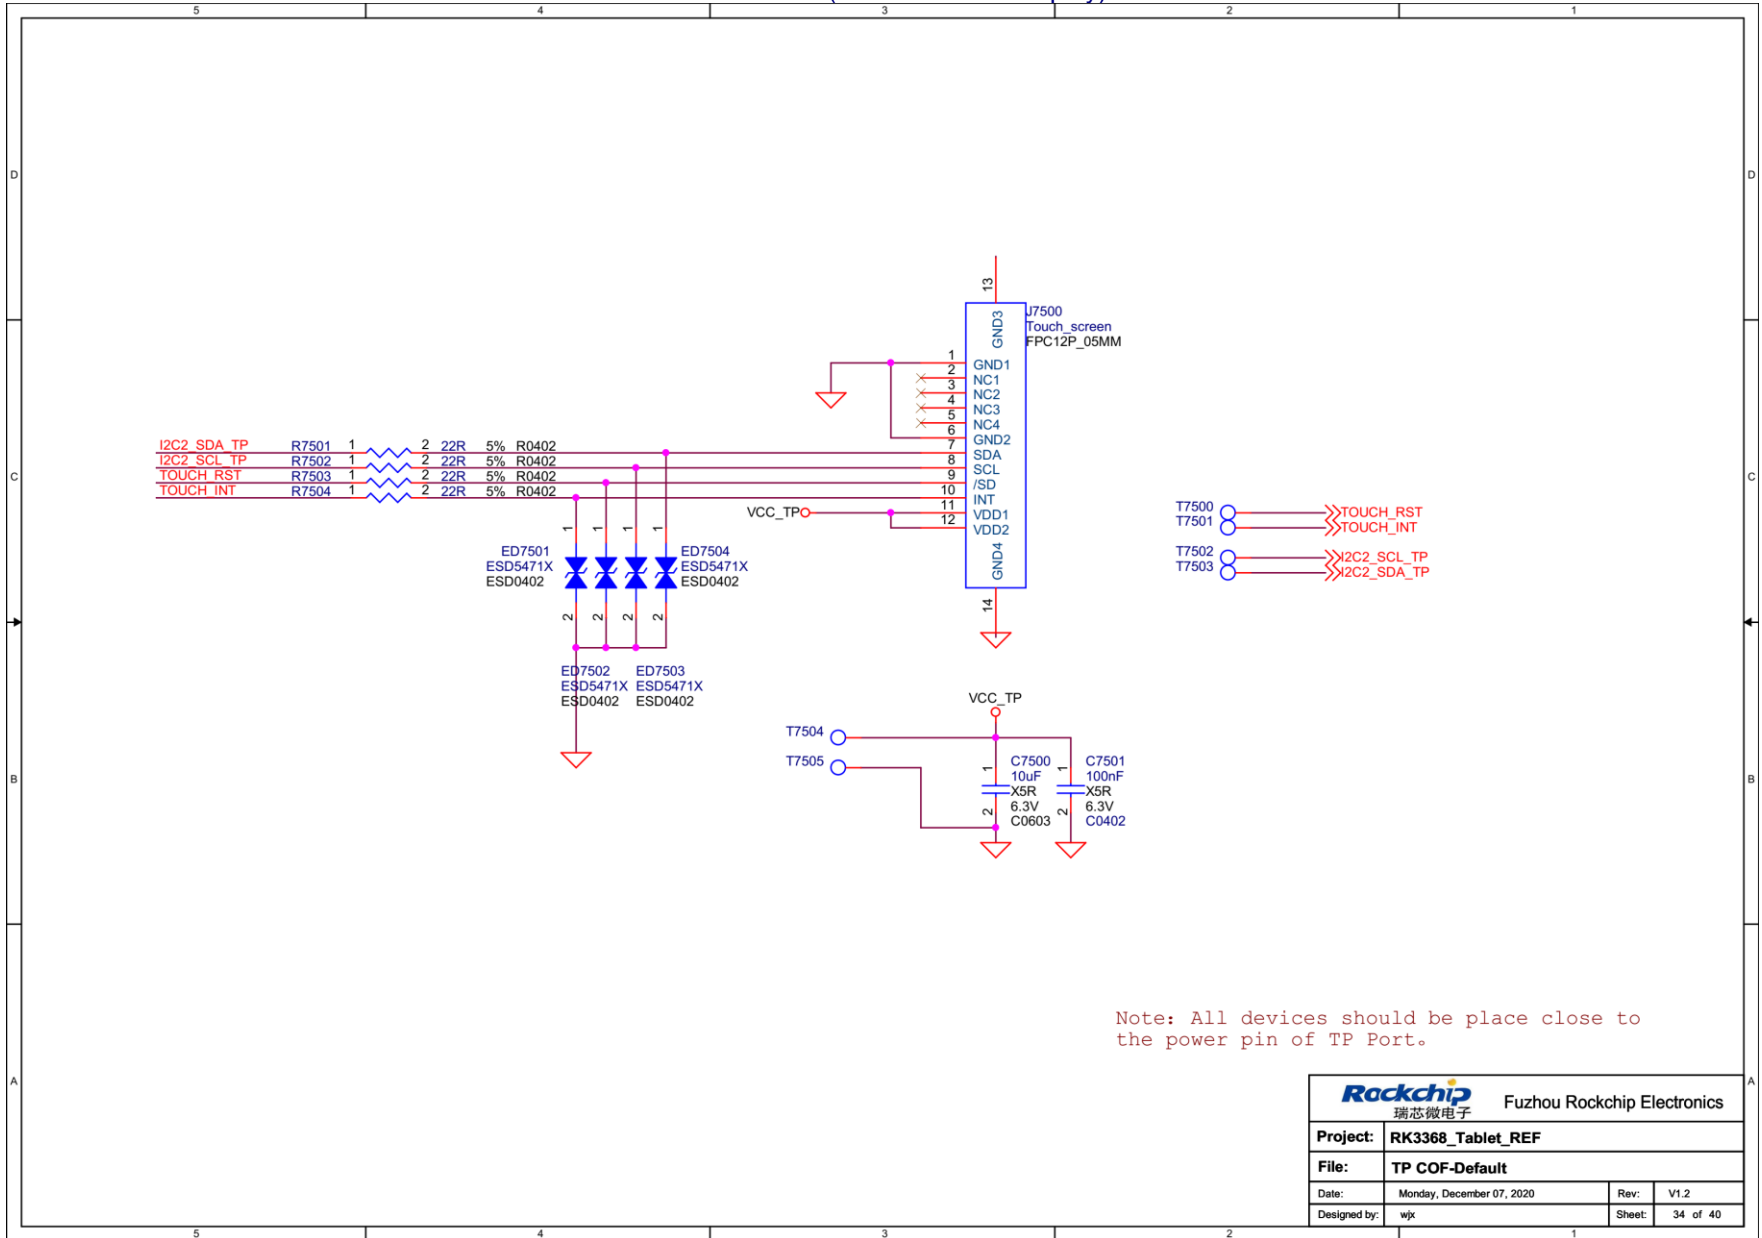


<b>Rockchip</b> 瑞芯微电子		Fuzhou Rockchip Electronics	
<b>Project:</b>	RK3368_Tablet_REF		
<b>File:</b>	TP COF-Default		
<b>Date:</b>	Monday, December 07, 2020	<b>Rev:</b>	V1.2
<b>Designed by:</b>	wjx	<b>Sheet:</b>	34 of 40

Alternative Control Panel

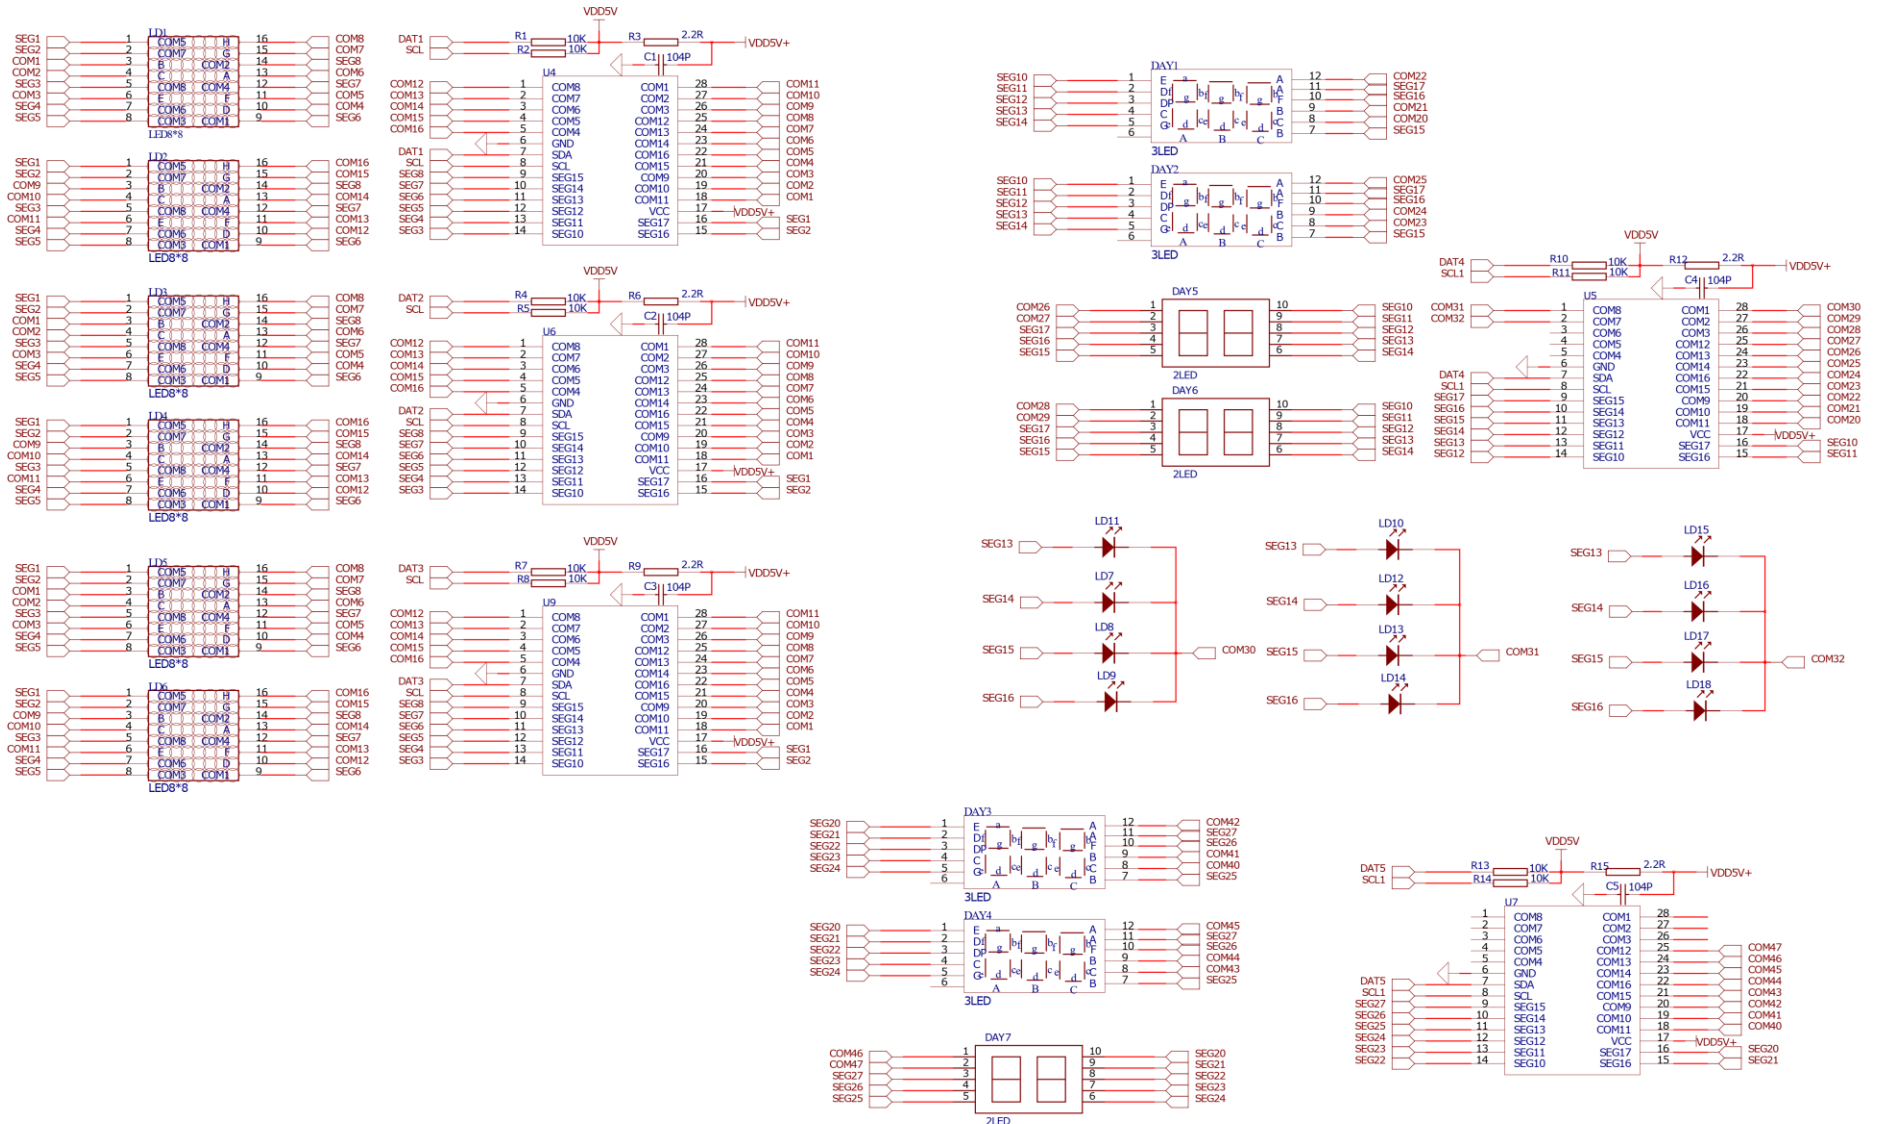

Alternative Control Panel

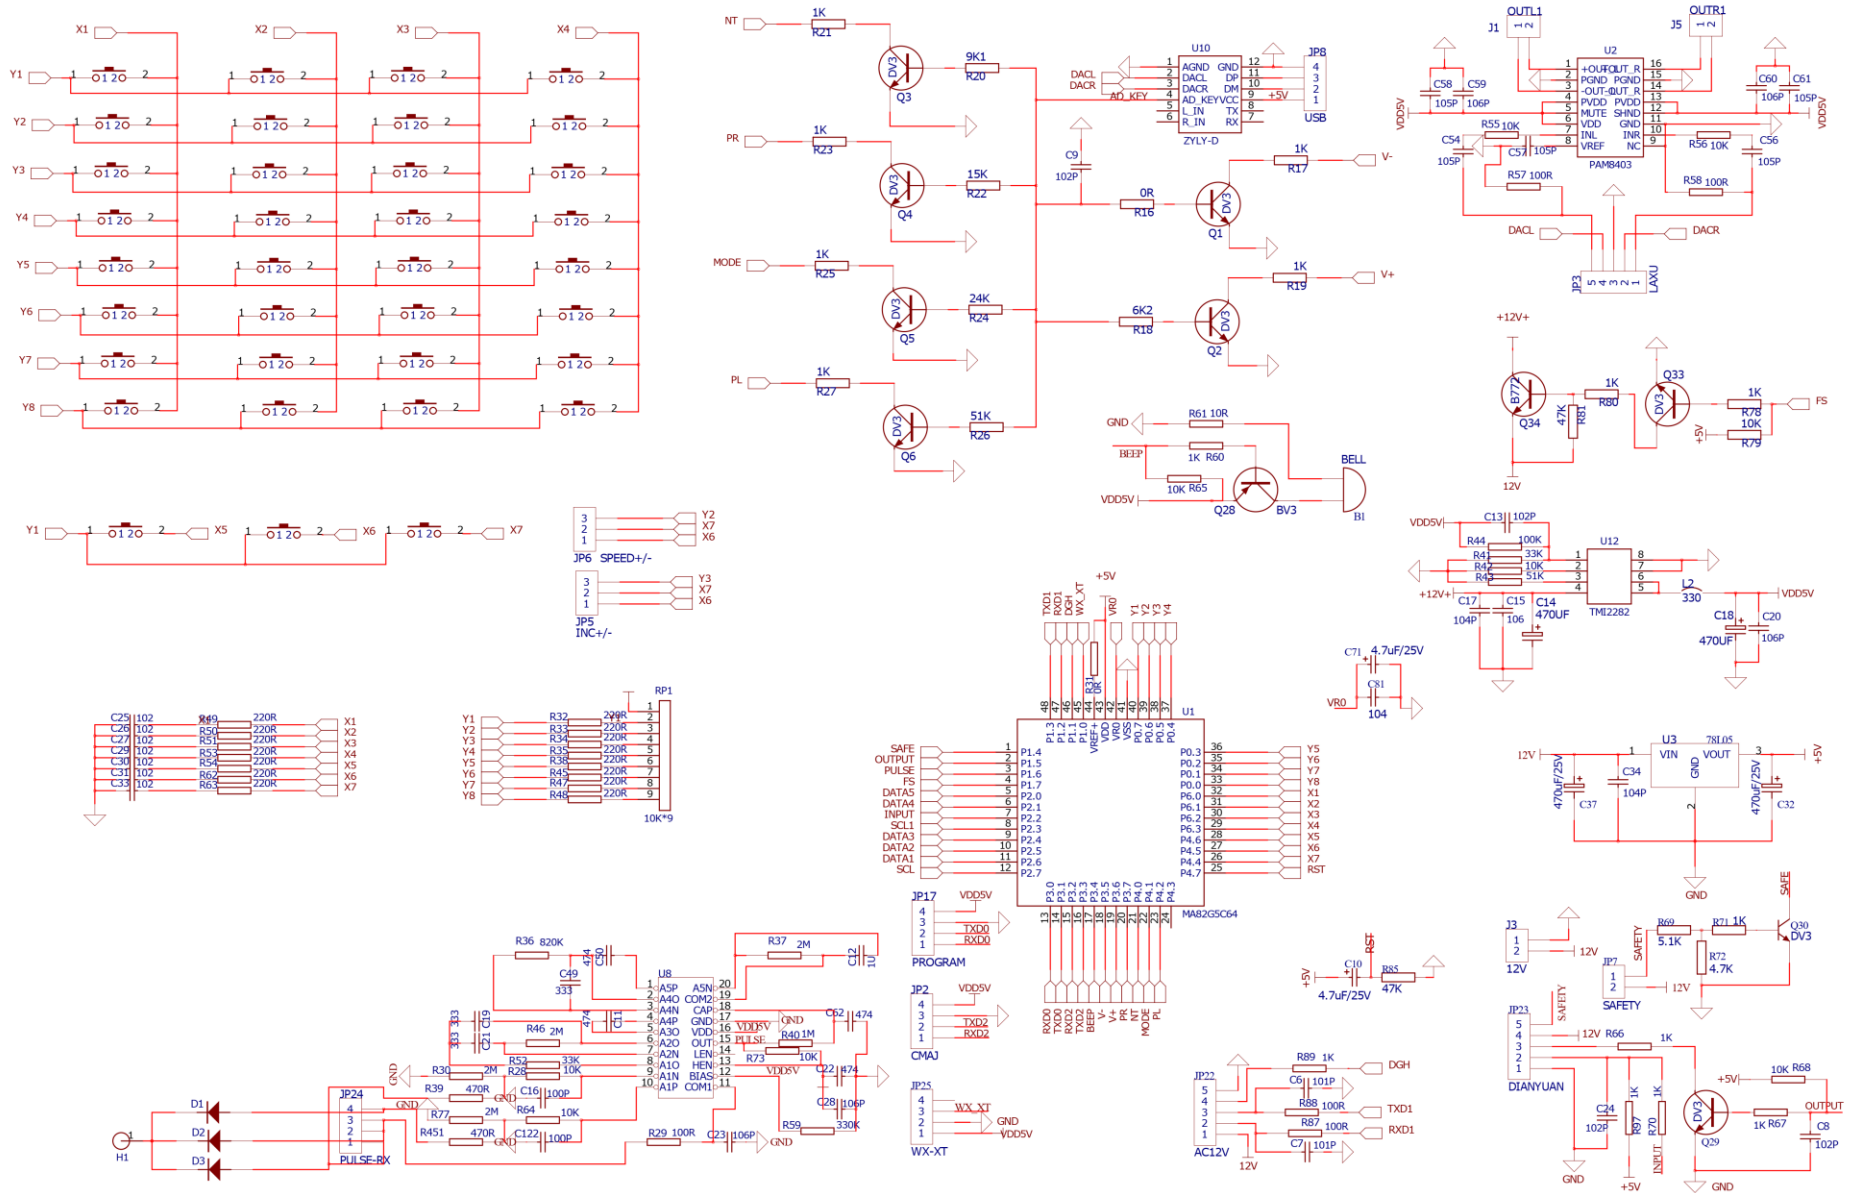

.....End of Attachment 1.....

**Photo documentation**

Type of equipment, model: Stair Trainer / K5311A, TF-ST105-T/Taurus Stair Trainer ST10.5 Touch, K5311, TF-ST105/Taurus Stair Trainer ST10.5, K5311B

Details of: General view for model K5311A, model (TF-ST105-T/Taurus Stair Trainer ST10.5 Touch) have the same construction

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	---

Details of: General view for model K5311A, model (TF-ST105-T/Taurus Stair Trainer ST10.5 Touch) have the same construction

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--

Details of: Control panel and handle for model K5311A, model (TF-ST105-T/Taurus Stair Trainer ST10.5 Touch) have the same construction

---

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>A close-up photograph of the control panel and handles of a stair trainer. The control panel is black and features a large rectangular screen. Below the screen, there are several buttons and a small display. The handles are black and have a silver-colored grip area. A red emergency stop button is visible on the right handle. The background is a plain light blue surface.</p>
---	--

Details of: General view for model K5311, models (TF-ST105/Taurus Stair Trainer ST10.5, K5311B) have the same construction

---

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>A photograph showing a general view of a stair trainer machine. The machine is silver and black, with a large, curved frame. It is positioned on a grey floor against a light blue background. A yellow measuring tape is visible on the left side of the machine, indicating its height. The machine has a control panel and handles on top.</p>
---	---



Details of: General view for model K5311, models (TF-ST105/Taurus Stair Trainer ST10.5, K5311B) have the same construction

<p>View:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> General</li> <li><input type="checkbox"/> Front</li> <li><input type="checkbox"/> Rear</li> <li><input type="checkbox"/> Right</li> <li><input type="checkbox"/> Left</li> <li><input type="checkbox"/> Top</li> <li><input type="checkbox"/> Bottom</li> <li><input type="checkbox"/> Internal</li> </ul>	 <p>A photograph showing a front view of a black and silver stair trainer. The machine has a central console with a digital display and several buttons. The steps are black with orange accents. The machine is positioned on a grey floor against a light blue background.</p>
--	--

Details of: General view for model K5311, models (TF-ST105/Taurus Stair Trainer ST10.5, K5311B) have the same construction

<p>View:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> General</li> <li><input type="checkbox"/> Front</li> <li><input type="checkbox"/> Rear</li> <li><input type="checkbox"/> Right</li> <li><input type="checkbox"/> Left</li> <li><input type="checkbox"/> Top</li> <li><input type="checkbox"/> Bottom</li> <li><input type="checkbox"/> Internal</li> </ul>	 <p>A close-up photograph of the console area of the stair trainer. The console is black and features a digital display showing 'TIME STEPS', 'HEIGHT/POD', 'CALORIES', 'LEVEL', 'PULSE', and 'SPM'. Below the display is a numeric keypad (1-9, 0, ON) and several function buttons. The console is mounted on a black frame with silver accents.</p>
--	--

Details of: General view (inlet, switch)

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--

Details of: General view


<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--




Details of: Electric part view after removing the guard

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	
--	--


Details of: EMI

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>Jenny Electronics EMI FILTER JN4-4A-T(206) 115/250V 80/50Hz CE L1 2x10mH Cx1 1.0uF Cy2x4.7nF L2 4.0mH Cx2 0.47uF R 1.0MΩ</p>
---	--

Details of: Electromagnetic brake
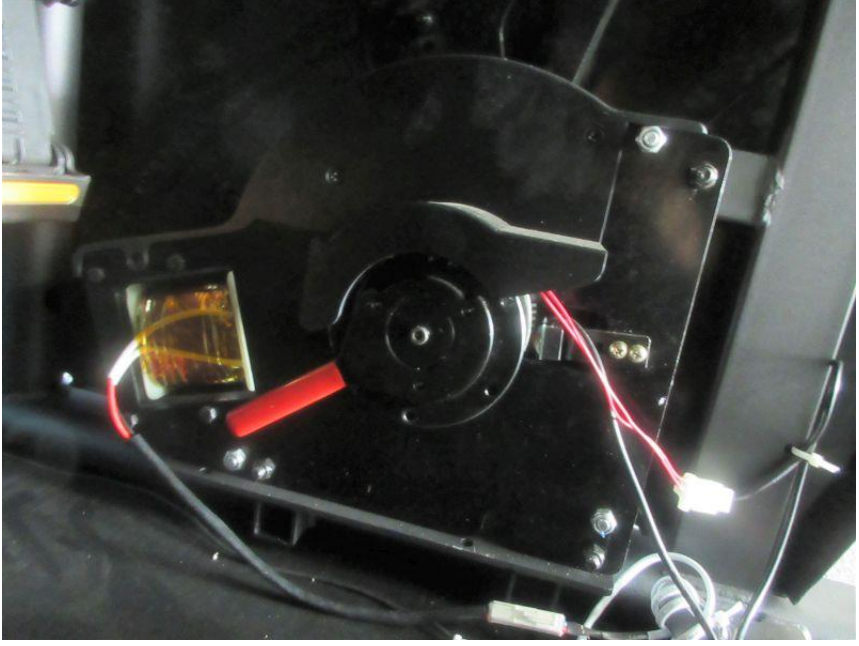
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--


Details of: Earthed connection
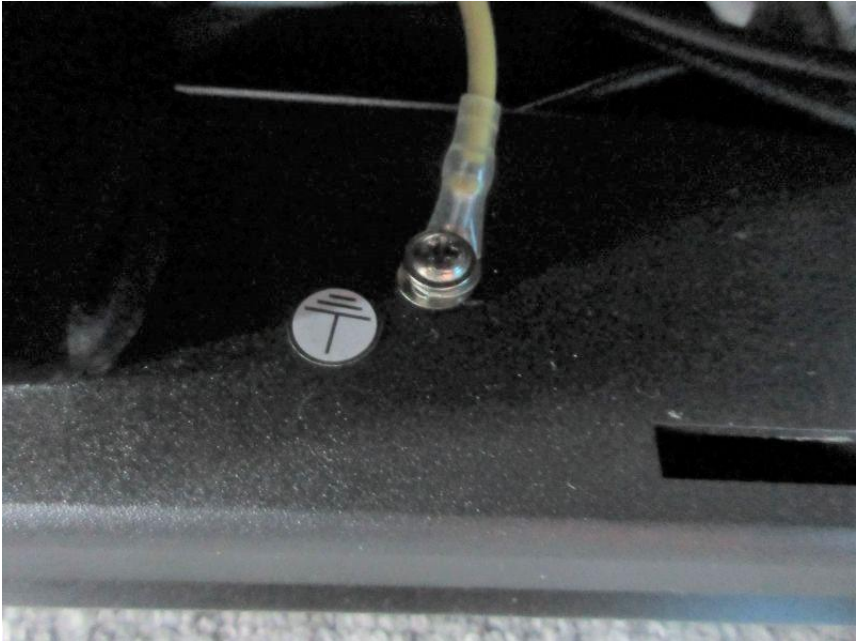
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--

Details of: Power board


<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>A photograph showing the top view of a green printed circuit board (PCB) power board. The board is populated with various electronic components, including a large black electrolytic capacitor on the left, a yellow electrolytic capacitor in the center, and several smaller capacitors and integrated circuits. A silver metal heat sink is mounted on the right side of the board. A white label with the text "110V-240V" is attached to the heat sink. The board is placed on a blue surface next to a black ruler with white markings, which shows the board's dimensions are approximately 100mm by 60mm.</p>
---	--

Details of: Power board

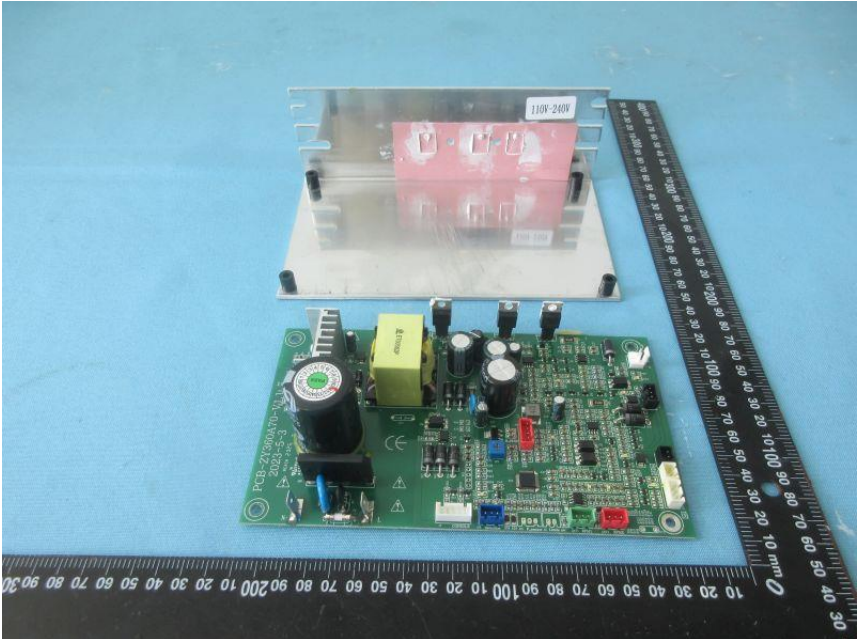
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>A photograph showing the bottom view of the same green PCB power board. This view highlights the underside of the board, showing the reverse side of the components and the mounting holes. The silver metal heat sink is visible from below, and the white "110V-240V" label is also present. The board is positioned next to the same black ruler as in the top view, providing a consistent scale for comparison.</p>
---	--




Details of: Power board

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>The image shows the top view of a green PCB power board. It features a large black electrolytic capacitor on the left, a yellow transformer in the center, and several other capacitors and integrated circuits. A ruler is placed at the bottom and right for scale, showing the board is approximately 100mm wide and 60mm high. The PCB has the text 'PCB-Z1360A70-2023-5-3' printed on it.</p>
---	--


Details of: Power board
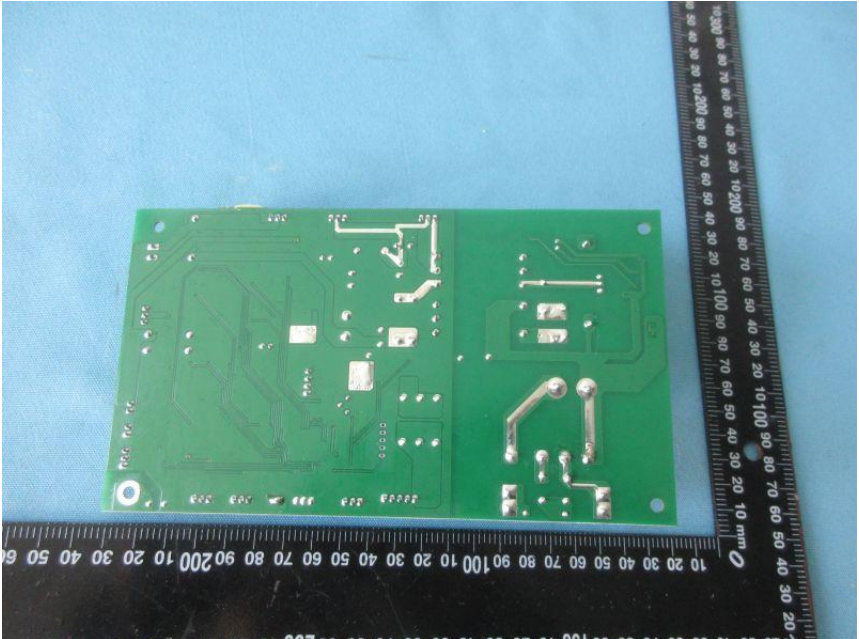
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>The image shows the bottom view of the green PCB power board. It displays the intricate copper traces and various components like capacitors and resistors. A ruler is placed at the bottom and right for scale, showing the board is approximately 100mm wide and 60mm high.</p>
---	---


Details of: Transformer
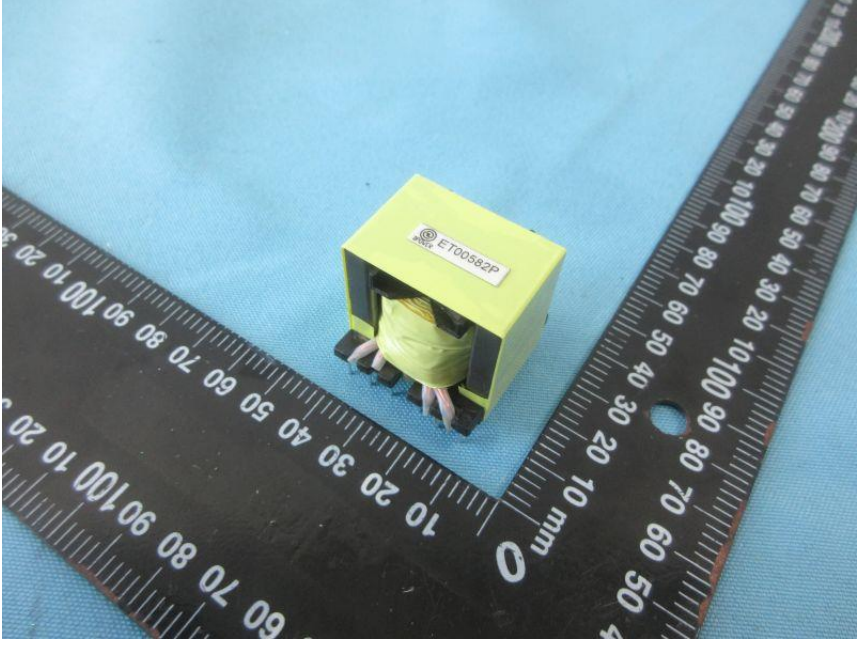
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--


Details of: Transformer
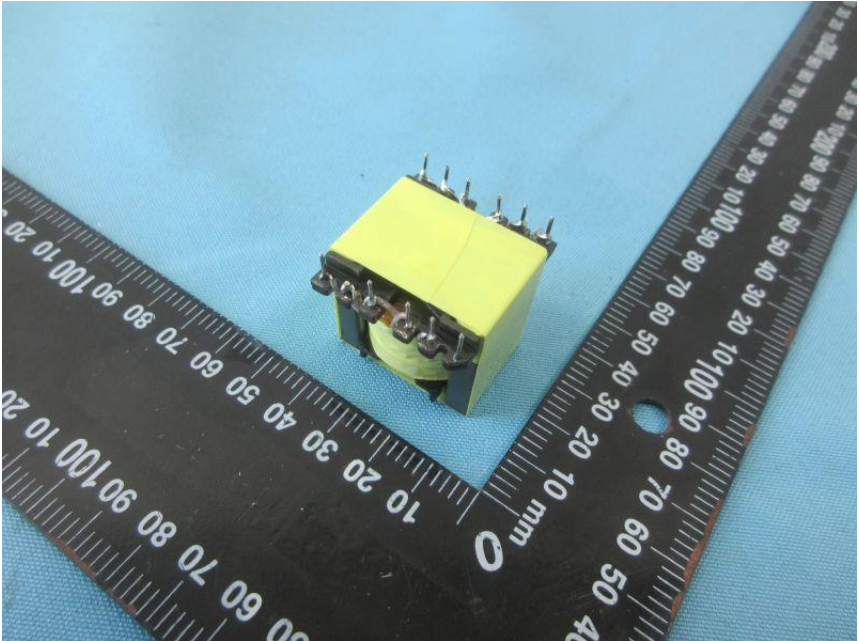
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	
---	--

Details of: Transformer

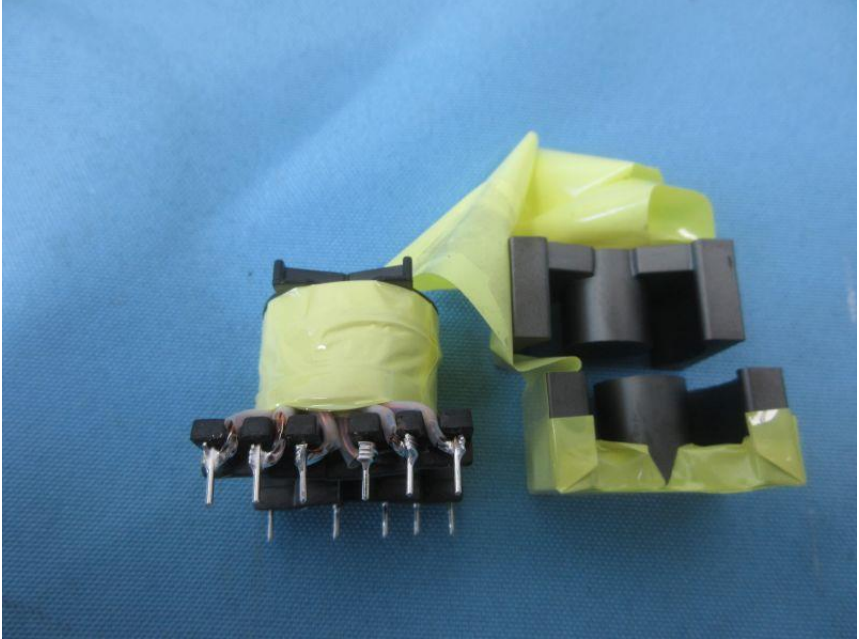
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input type="checkbox"/> Internal</li></ul>	 <p>A photograph of a transformer component on a blue background. The component is a black plastic housing with several pins protruding from the bottom. A piece of yellow tape is wrapped around the top part of the component. To the right of the component is a separate piece of yellow tape.</p>
---	--

Details of: Winding of Transformer

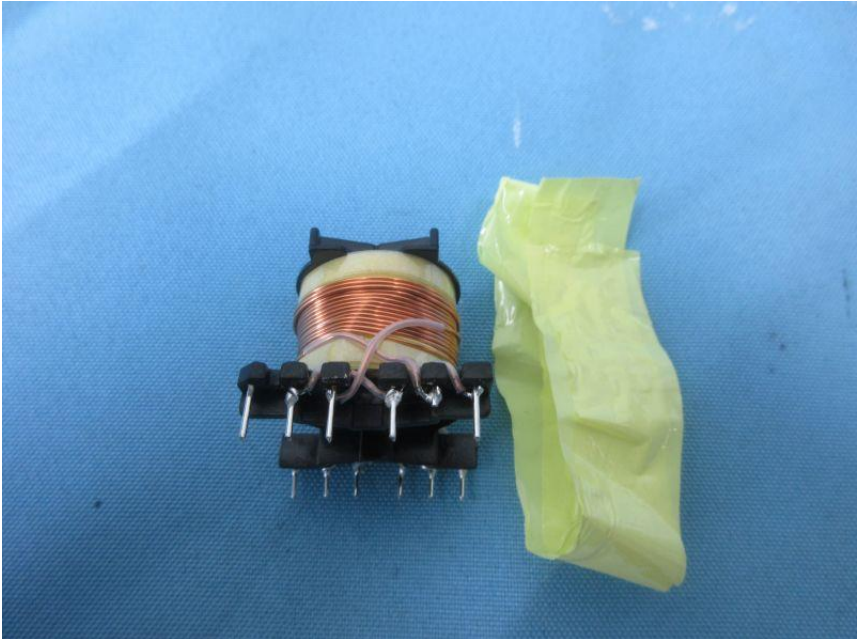
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	 <p>A photograph of the transformer winding on a blue background. The component is a black plastic housing with several pins protruding from the bottom. The winding is visible as a series of copper coils wrapped around a central core. A piece of yellow tape is wrapped around the top part of the component. To the right of the component is a separate piece of yellow tape.</p>
--	--




Details of: Winding of Transformer

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	 <p>A photograph of a transformer winding assembly. The assembly consists of a black plastic base with several silver pins protruding from the bottom. On top of the base, there are several layers of copper wire wound around a central core. The entire assembly is partially covered with a piece of yellow tape. The background is a blue textured surface.</p>
--	--


Details of: Winding of Transformer
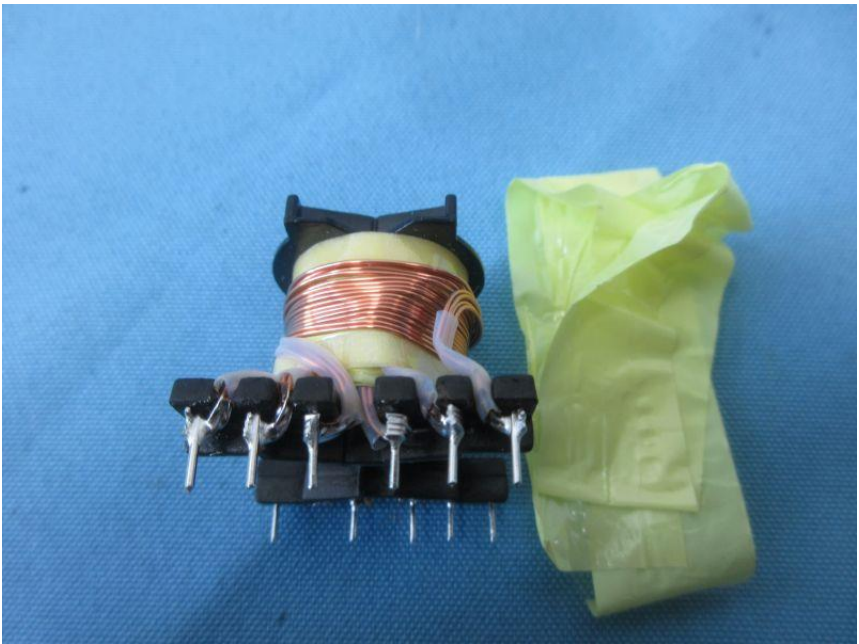
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	 <p>A photograph of a transformer winding assembly, identical to the one in the first image. It shows a black plastic base with silver pins, copper wire windings, and a piece of yellow tape. The background is a blue textured surface.</p>
--	---

Details of: Winding of Transformer

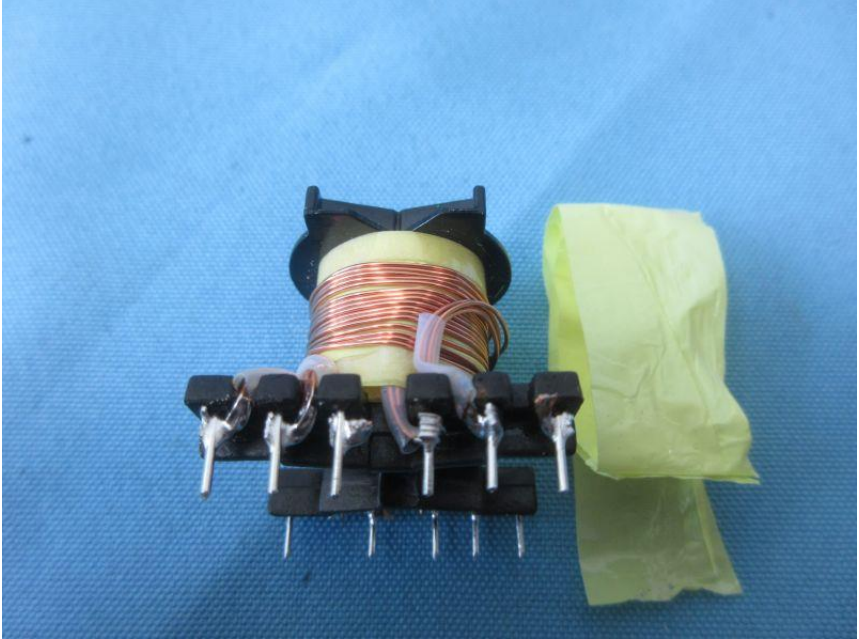
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	 A photograph of a transformer winding assembly. It features a central core with multiple layers of copper wire wound around it. The assembly is mounted on a black base with several silver-colored pins extending downwards. To the right of the assembly is a piece of yellowish-green translucent tape. The background is a blue textured surface.
--	--

Details of: Winding of Transformer
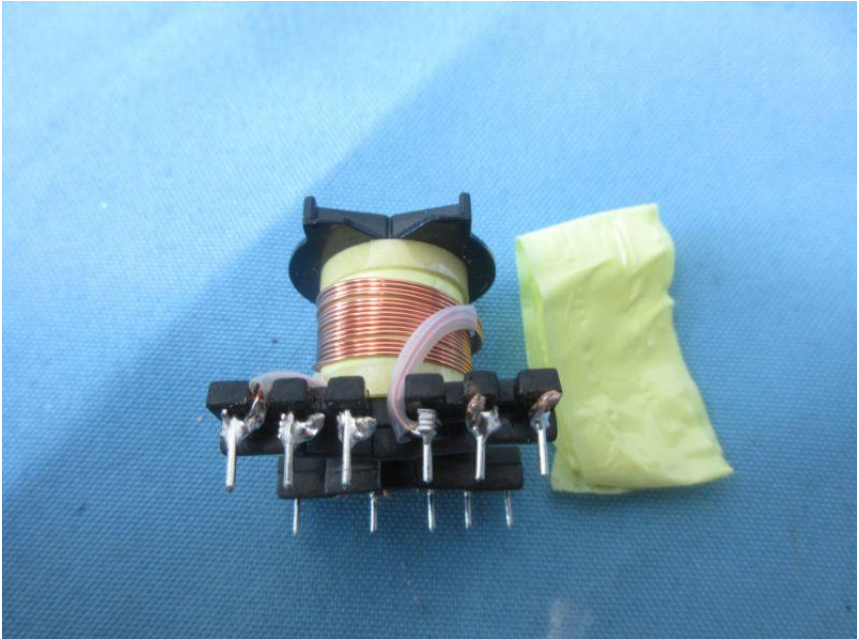
<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	 A photograph of a transformer winding assembly, identical to the one in the first image. It shows a central core with copper wire windings, mounted on a black base with silver pins. A piece of yellowish-green tape is visible to the right. The background is blue textured.
--	--



Details of: Winding of Transformer

<p>View:</p> <ul style="list-style-type: none"><li><input checked="" type="checkbox"/> General</li><li><input type="checkbox"/> Front</li><li><input type="checkbox"/> Rear</li><li><input type="checkbox"/> Right</li><li><input type="checkbox"/> Left</li><li><input type="checkbox"/> Top</li><li><input type="checkbox"/> Bottom</li><li><input checked="" type="checkbox"/> Internal</li></ul>	
--	--

— End of This Attachment 2—

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ATTACHMENT TO TEST REPORT</b> <b>IEC 60335-1:2010 + A1:2013 + A2:2016</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> Household and similar electrical appliances – Safety – Part 1: GENERAL REQUIREMENTS			
<b>Differences according to</b> .....: EN 60335-1:2012 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 EN 62233:2008			
<b>TRF template used</b> .....: IECEE OD-2020-F2:2020, Ed. 1.1			
<b>Attachment Form No</b> .....: EU_GD_IEC60335_1X_II			
<b>Attachment Originator</b> .....: Nemko Group AS			
<b>Master Attachment</b> .....: 2022-03-04			
<b>Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>			
<b>CENELEC COMMON MODIFICATIONS (EN)</b>			—
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.12	The instructions include the substance of the following:		—
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test, except that		P
	appliances normally used on the floor and having a mass exceeding 40 kg are not tilted		P
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P
8.1.3	Instead of test probe B, test probe 18 and test probe 13, for appliances other than those of class II, test probe 41 of IEC 61032 is applied with a force not exceeding 1 N to live parts of visibly glowing heating elements, all poles of which can be disconnected by a single switching action		N/A
8.2	Compliance is checked by inspection and by applying the test probes of EN 61032 in accordance with the conditions specified in 8.1.1		P
	Test probe B and probe 18 of EN 61032 are applied to built-in appliances and fixed appliances only after installation		N/A
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
20.2	For appliances having hazardous moving parts, due to their working function, e.g. the needle of a sewing machine, tools of kitchen machines or the blade of an electrical knife, full protection is not possible for performing their intended use		P
	When using a test probe similar to test probe B of EN 61032, having a circular stop face and applied with a force of 5N, the accessories and detachable covers are removed		P
	When using test probe 18 it is applied with a force of 2,5N on the appliance fully assembled		P
22.12	Other parts intended to be detached during use, maintenance or cleaning (e.g. batteries, battery covers, lids, attachments, steam nozzles) are not considered as parts providing a similar function as handles, knobs, grips, levers		N/A
22.17	The requirement is not applicable to built-in appliances		N/A
22.44	An appliance is child-appealing if one of the following criteria is present:		—
	- appliance decorated using faces, cartoon like characters, or similar images	no used such decorated	N/A
	- appliance using shapes representing animals, characters, persons or scale models	no such shapes	N/A
	An appliance is child-appealing if more than one of the following criteria are present:		—

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- using non-functional light (functional light is e.g. illumination of an object or area, signal indicating status of an appliance)	functional indicator	N/A
	- using non-functional sound (e.g. music)		N/A
	- using non-functional movement		N/A
	If the appliance is child-appealing, has a mass less than 4 kg or is mounted or normally intended for use at a height less than 850 mm, the following conditions shall be met:		N/A
	- surface temperature rise requirements not exceeded		N/A
	- hazardous moving parts not accessible		N/A
	- live parts not accessible		N/A
	- liquid temperature requirement not exceeded,		N/A
	unless for vessels in which two independent and sequential actions are needed to access the liquid		N/A
	- the requirement of 22.12 is applicable for all accessible parts of the appliance		N/A
24.1	Components comply with the safety requirements specified in the relevant EN standards as far as they reasonably apply		P
	Motors are not required to comply with EN 60034-1, but tested as part of the appliance according to this standard		N/A
	Relays are tested as part of the appliance according to this standard		N/A
	Relays may be alternatively tested to EN 60730-1 and the additional requirements in EN 60335-1		N/A
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		P
	Components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	Components that have not been tested and shown to comply with the EN standard for the relevant component are tested according to the requirements of 30.2 of this standard		P

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Components that have been tested and shown to comply with the resistance to fire requirements in the EN standard for the relevant component need not be retested provided that:		—
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		N/A
	- the test report for the component states the values of $t_e$ and $t_i$ acc. to EN 60695-2-11		N/A
	If the above two conditions are not satisfied, the component is tested as part of the appliance		P
	Power electronic converter circuits are not required to comply with EN 62477-1, but tested as part of the appliance according to this standard		N/A
	Unless components have been tested and found to comply with the relevant EN standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N/A
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant EN standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been tested and found to comply with the relevant EN standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		P
	Lamp-holders and starter-holders that have not been tested and found to comply with the relevant EN standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant EN standard under the conditions occurring in the appliance		N/A
	Where the relevant EN standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		N/A
	There are no additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of EN 60320-1 and EN 60309, unless they are specifically mentioned in the text of this standard		P

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		N/A
	with connectors and appliance inlets complying with the standard sheets of EN 60320-1, if		P
	direct supply to these parts from the supply mains gives rise to a hazard		P
	For plugs used in CENELEC countries Annex ZH applies		P
24.Z1	Type S2 and S3 capacitors according to EN 60252-1 are not required to undergo the testing as required by 30.2.2 and 30.2.3.1		N/A
25.1	Plugs and pins for insertion into socket outlets follow the relevant standards sheets in Annex ZH		P
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors, or		N/A
	when they are liable to be exposed to significant amount of ultraviolet radiation		N/A
25.25	Instead of IEC/TR 60083, dimensions of the pins and engagement face of plugs of appliances that are inserted into socket-outlets are in accordance with the dimensions of the relevant plug standard		N/A
	Common plugs and socket-outlets types in CENELEC countries as shown in Annex ZH		N/A
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position,		N/A
	unless they are held in place near the terminals independently of the solder		N/A
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A
	The duration of any of the tests is as specified in 19.7		N/A
<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS (EN)</b>		—

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<b>Denmark, Sweden, Norway and Finland</b>		N/A
7.12.8	The maximum inlet water pressure is at least 1,0 MPa .....		N/A
	<b>Norway</b>		N/A
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	<b>Norway</b>		N/A
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	<b>Denmark</b>		N/A
22.47	The maximum inlet water pressure is at least 1,0 MPa .....		N/A
	<b>Ireland, United Kingdom and Cyprus</b>		N/A
25.8	In the table, the line >10 A and ≤16 A is replaced with:		N/A
	> 10 and ≤ 13 1,25 (1,0) <sup>b</sup>		N/A
	> 13 and ≤ 16 1,5 (1,0) <sup>b</sup>		N/A
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A-DEVIATIONS</b>		—
	<b>Ireland</b>		N/A
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A
	<b>United Kingdom</b>		N/A
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances.		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N/A
<b>ZC</b>	<b>ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>		—
	A list of documents referred to in the text of this standard in such a way that some or all of their content constitutes requirements of this document		P
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>		—
	List of IEC and CENELEC code designations for flexible cords		P
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>		—
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative .....		N/A
	Model or type reference .....		N/A
	Serial number, if any		N/A
	Production year		N/A
	Designation of the appliance .....		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		—
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A
	- specific precautions required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A



IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A
7.12.ZE1	If needed for specific appliances, the following information to be given:		—
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		N/A
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N/A
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N/A
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		—
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A).....;		N/A
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa).....;		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A).....;		N/A
7.12.ZE2	The instructions include a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug is such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		—
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		—
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2.....:		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		—
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>		—
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive) .....	LVD	P
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE) UV APPLIANCES</b>		—
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
<b>ZH</b>	<b>ANNEX ZH (INFORMATIVE) Common plug and socket-outlet types in CENELEC countries</b>		—
	In general, supply cords of single-phase appliances having a rated current not exceeding 16 A are fitted with a plug complying with the following standard sheets:		—

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- for class I appliances or class II appliances with functional earth, standard sheet EU2, EU3 or EU4 .....	EU2 or EU4	P
	- for class II appliances, standard sheet EU5, EU6 or EU7 .....		N/A
	There are exemptions or differences in certain CENELEC countries		P
<b>ZI</b>	<b>ANNEX ZI (INFORMATIVE) Information on the application of A11:2014 to EN 60335-1:2012 CENELEC CLC/TC 61(SEC)2096A</b>		—
	Clarification of the application of parts 2 in conjunction with the 2002 or 2012 version of EN 60335-1		P
<b>ZZA</b>	<b>ANNEX ZZA (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED</b>		—
	This standard provides one means of conforming to safety objectives of Directive 2014/35/EU		P
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZA.1 confers a presumption of conformity with the safety objectives of that Directive and associated EFTA regulations		P
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the safety objectives		P
<b>ZZB</b>	<b>ANNEX ZZB (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE ESSENTIAL REQUIREMENTS OF DIRECTIVE 2006/42/EC AIMED TO BE COVERED</b>		—
	This standard provides one means of conforming to essential requirements of EU Directive 2006/42/EC		N/A
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZB.1 confers a presumption of conformity with the essential requirements of that Directive and associated EFTA regulations		N/A

IEC60335_1X ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the essential health and safety requirements		N/A
	<b>ANNEX EN 62233:2008 + AC:2008 EMF- ELECTROMAGNETICS FIELDS</b>		—
	The tested product also complies with the requirements of EN 62233:2008		—
	Limit .....100%	For model K5311A measured max.: 3,8 % For model K5311 measured max.: 3,6 %	P

--End of this Attachment 3--

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict

<b>ATTACHMENT TO TEST REPORT IEC 60335-1</b> <b>Household and similar electrical appliances – Safety –</b> <b>Part 1: General requirements</b>	
<b>Differences according to:</b>	IEC 61558-2-16:2009+A1: 2013
<b>Attachment Form No.:</b>	IEC61558-2-16 Annex BB _A
<b>Attachment Originator:</b>	SGS-CSTC
<b>Master Attachment:</b>	Date 2015-05

<b>BB</b>	<b>Annex BB</b>		P
	<b>Particular requirements for associated transformers for switch mode power supplies with internal frequencies &gt; 500 Hz</b>		—
	See separate test report-form for these Annex.		P
<b>BB.8</b>	<b>MARKING AND OTHER INFORMATION</b>		N/A

<b>BB.9</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		N/A
-------------	--	--	-----

<b>BB.10</b>	<b>CHANGE OF INPUT VOLTAGE SETTING</b>		N/A
--------------	--	--	-----

<b>BB.11</b>	<b>OUTPUT VOLTAGE AND OUTPUT CURRENT UNDER LOAD</b>		N/A
--------------	---	--	-----

<b>BB.12</b>	<b>NO-LOAD OUTPUT VOLTAGE (see supplementary requirements in Part 2)</b>		N/A
--------------	--	--	-----

<b>BB.13</b>	<b>SHORT-CIRCUIT VOLTAGE</b>		N/A
--------------	------------------------------	--	-----

<b>BB.14</b>	<b>HEATING</b>		P
BB.14.2	Application of 14.1 or 14.3 according to the insulation system		P
BB.14.2.1	Class of isolating system (classified materials according to IEC 60 085 and IEC 60 216)		P
BB.14.2.2	No classified material, or system but the measured temperature does not exceed the value of Class A		N/A
BB.14.2.3	No classified material or system but the measured temperature exceeds the value for Class A, the live parts of the transformers are submitted to the test of 14.3		N/A
BB.14.3	Accelerated ageing test for undeclared class of isolating system		N/A
	Cycling test (10 cycles):		N/A



<b>IEC 61558-2-16:2009+A1:2013</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	– measuring of the no-load input current (mA)		N/A
BB.14.3.1	– heat run (temperature in table 2)		N/A
BB.14.3.2	– vibration test: 30 min; amplitude 0,35 mm; frequency range: 10 Hz, 55 Hz, 10 Hz		N/A
BB.14.3.3	– moisture treatment (48 h, 17.2)		N/A
BB.14.3.4	Measurements and tests at the beginning and after each test:		N/A
	– deviation of the no-load input current, measured at the beginning of the test is $\leq 30\%$		N/A
	– insulation resistance acc. cl.18.1 and 18.2		N/A
	– electric strength, no breakdown (18.3); 2 min; test voltage 35% of specified value (table VI)		N/A
	– Transformers (50 or 60 Hz version) are tested after the dielectric strength test as follows: under no load; duration: 5 min; Upri(V):1,2 times rated supply voltage; frequency (Hz): 2 times rated frequency		N/A
<b>BB.15</b>	<b>SHORT-CIRCUIT AND OVERLOAD PROTECTION</b>		N/A
<b>BB.16</b>	<b>MECHANICAL STRENGTH</b>		N/A
<b>BB.17</b>	<b>PROTECTION AGAINST HARMFUL INGRESS OF WATER AND MOISTURE</b>		N/A
<b>BB.18</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		P
BB.18.2	Insulation resistance between:		P
	– live parts and body for basic insulation $\geq 2 \text{ M}\Omega$		N/A
	– live parts and body for reinforced insulation $\geq 7 \text{ M}\Omega$		N/A
	– input circuits and output circuits for basic insulation $\geq 2 \text{ M}\Omega$		N/A
	– input circuits and output circuits for double or reinforced insulation $\geq 5 \text{ M}\Omega$	500 M $\Omega$	P
	– each input circuit and all other input circuits connected together $\geq 2 \text{ M}\Omega$		N/A
	– each output circuit and all other output circuits connected together $\geq 2 \text{ M}\Omega$		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– hazardous live parts and metal parts with basic insulation (Class II transformers) $\geq 2 \text{ M}\Omega$		N/A
	– body and metal parts with basic insulation (Class II transformers) $\geq 5 \text{ M}\Omega$		N/A
	– metal foil in contact with inner and outer surfaces of enclosures $\geq 2 \text{ M}\Omega$		N/A
BB.18.3	Electric strength test (1 min): no flashover or breakdown:		P
	1) basic insulation between input circuits and output circuits; working voltage (V); test voltage (V) .....		N/A
	2) double or reinforced insulation between input circuits and output circuits; working voltage (V); test voltage (V) .....	4200 V	P
	3) basic or supplementary insulation between:		N/A
	a) live parts of different polarity; working voltage (V); test voltage (V) .....		N/A
	b) live parts and the body if intended to be connected to protective earth .....		N/A
	c) inlet bushings and cord guards and anchorages .....		N/A
	d) live parts and an intermediate conductive part .....		N/A
	e) intermediate conductive parts and body :		N/A
	4) Reinforced insulation between the body and live parts; working voltage (V); test voltage (V) .....		N/A
	5) Functional insulation for windings intended to be connected in series or parallel (test voltage = working voltage + 500 V) (IEC 61558-2-16:2009)		N/A
18.102 (A1)	Partial discharge tests according IEC 60664-1 , if the working voltage is $> 750 \text{ V peak}$		N/A
	Partial discharge is $\leq 10 \text{ pC}$ at time P2 See Fig. 19.101		N/A

<b>BB.19</b>	<b>CONSTRUCTION</b>		<b>P</b>
BB.19.1	Separation of input and output circuits		P
BB.19.1.1	SMPS incorporating auto-transformers (IEC 61558-2-16:2009)		N/A
BB.19.1.2	SMPS incorporating separating transformers (IEC 61558-2-16:2009)		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
BB.19.1.2.1	Input and output circuits electrically separated. (IEC 61558-2-16:09)		N/A
BB.19.1.2.2	The insulation between input and output winding(s) consist of basic insulation (IEC 61558-2-16:09)		N/A
	Class I SMPS		N/A
	– Insulation between input windings and body consist of basic insulation		N/A
	– Insulation between output windings and body consist of basic insulation		N/A
	Class II SMPS (IEC 61558-2-16:09)		N/A
	– Insulation between input windings and body consist of double or reinforced insulation		N/A
	– Insulation between output windings and body consist of double or reinforced insulation		N/A
BB.19.1.2.3	The insulation between input windings and intermediate conductive parts and the output windings and intermediate part consist of basic insulation (IEC 61558-2-16:09)		N/A
	For class I SMPS the insulation between input and output windings via the intermediate conductive parts consist of basic insulation (IEC 61558-2-16:09)		N/A
	For class II SMPS the insulation between input winding and the body and between the output windings and the body via the intermediate conductive parts consist of double or reinforced insulation (IEC 61558-2-16:09)		N/A
BB.19.1.2.4	Parts of output circuits may be connected to protective earth (IEC 61558-2-16:09)		N/A
BB.19.1.2.5	No direct contact between output circuits and the body, unless: (IEC 61558-2-16:2009)		N/A
	– Allowed for associated transformers by the equipment standard		N/A
	– Clause 19.8 of part 1 is fulfilled		N/A
BB.19.1.3	SMPS incorporating isolating transformers and safety isolating transformers (IEC 61558-2-16:09)		P
BB.19.1.3.1	Input and output circuits electrically separated (IEC 61558-2-16:09)		P
	No possibility of any connection between these circuits		P
BB.19.1.3.2	The insulation between input and output winding(s) consist of double or reinforced insulation (exception see 19.1.3.4) (IEC 61558-2-16:09)		P

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	Class I SMPS <b>not</b> intended for connection to the mains by a plug:		—
	– Insulation between input windings and body connected to earth consist of basic insulation rated to the input voltage		N/A
	– Insulation between output windings and body, connected to earth consist of basic insulation rated for the output voltage		N/A
	Class I SMPS intended for connection to the mains by a plug (EN 61558-2-16:09):		N/A
	– Insulation between input windings and body connected to earth consist of basic insulation rated to the working voltage		N/A
	– Insulation between output windings and body, connected to earth consist of supplementary insulation rated for the working voltage		N/A
	Class II SMPS (IEC 61558-2-16:09)		P
	– Insulation between input windings and body consist of double or reinforced insulation rated to the input voltage		P
	– Insulation between output windings and body consist of double or reinforced insulation, rated to the output voltage		P
BB.19.1.3.3	SMPS with intermediate conductive parts not connected to the body (between input/output) (EN 61558-2-16:09):		N/A
19.1.3.3.1	For class I and class II SMPS the insulation between input and output windings, via intermediate conductive parts, consist of double or reinforced insulation, rated to the working voltage (EN 61558-2-16:09)		P
	– For class II SMPS the insulation between input winding and the body and between the output windings and the body via the intermediate conductive parts consist of double or reinforced insulation. (rated to the input voltage, for SELV circuits only basic insulation to the body))		P
	– For transformers, different from independent, the insulation between input and output windings, via intermediate conductive parts, consist of double or reinforced insulation, rated to the working voltage.		P
BB.19.1.3.3.2	Class I transformers with earthed core, and not allowed for class II equipment (EN 61558-2-16:09)		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– Insulation from the input to the earthed core: basic insulation rated for the input voltage		N/A
	– Insulation from the output voltage to the earthed core: basic insulation rated for the output voltage		N/A
BB.19.1.3.3.3	Insulation between : input to intermediate conductive parts and output and intermediate parts consist of at least basic insulation (EN 61558-2-16:09)		N/A
	– If the insulation from input or output to the intermediate metal part is less than basic insulation, the part is considered to be connected to input or output.		N/A
BB.19.1.3.4	For class I SMPS, with protective screen, <b>not</b> connected to the mains by a plug the following conditions comply (EN 61558-2-16:09):		N/A
	– The insulation between input winding and protective screen consist of basic insulation (rated input voltage)		N/A
	– The insulation between output winding and protective screen consist of basic insulation (rated output voltage)		N/A
	– The protective screen consist of metal foil or a wire wound screen extending the full width of the windings and has no gaps or holes		N/A
	– Where the protective screen does not cover the entire width of the input winding, additional insulation to ensure double insulation in this area, is used.		N/A
	– If the screen is made by a foil, the turns are isolated, overlap at least 3 mm		N/A
	– The cross-section of the screen and the lead out wire is at least corresponding to the rated current of the overload device		N/A
	– The lead our wire is soldered or fixed to the protective screen.		N/A
	Protective screening is not allowed for SMPS with plug connection to the mains (EN 61558-2-16:09)		N/A
BB.19.1.3.5	No connection between output circuit and protective earth, except of associated transformers (allowed by equipment standard) or 19.8 is fulfilled (EN 61558-2-16:09)		N/A
BB.19.1.3.6	No connection between output circuit and body, except of associated transformers (allowed by equipment standard) (EN 61558-2-16:09)		P

<b>IEC 61558-2-16:2009+A1:2013</b>			
Clause	Requirement - Test	Result - Remark	Verdict
BB.19.1.3.7	The distance between input and output terminals for the connection of external wiring is 25 mm		N/A
BB.19.1.3.8	Portable SMPS having an rated output $\leq$ 630 VA (EN 61558-2-16:09)		N/A
BB.19.1.3.9	No connection between output circuit, and body except of associated transformers (allowed by equipment standard) (EN 61558-2-16:09)		N/A
BB.19.1.3.10	Protective screening is not allowed for SMPS with plug connection to the mains (EN 61558-2-16:09)		N/A
BB.19.11	Handles, levers, knobs, etc.:		N/A
	– insulating material		N/A
	– supplementary insulation covering		N/A
	– separated from shafts or fixing by supplementary insulation		N/A
BB.19.12	Windings construction		P
BB.19.12.1	Undue displacement in all types of transformers not allowed:		P
	– of input or output windings or turns thereof		P
	– of internal wiring or wires for external connection		N/A
	– of parts of windings or of internal wiring in case of rupture or loosening		N/A
BB.19.12.2	Serrated tape:		N/A
	– distance through insulation according to table 13		N/A
	– one additional layer of serrated tape, and		N/A
	– one additional layer without serration		N/A
	– in case of cheek less bobbins the end turns of each layer shall be prevented from being displaced		N/A
BB.19.12.3 (A1)	Insulated windings wires providing basic, supplementary or reinforced insulation, meet the following requirements:		P
	<ul style="list-style-type: none"> <li>• Multi-layer extruded or spirally wrapped insulation, passed the tests of annex K</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>• Basic insulation: two wrapped or one extruded wire</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>• Supplementary insulation: two layers, wrapped or extruded</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>• Reinforced insulation: three layers wrapped or extruded</li> </ul>		P

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	Spirally wrapped insulation:		N/A
	<ul style="list-style-type: none"> <li>creepage distances between wrapped layers &gt; cl. 26 _ P1 values</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>path between wrapped layers sealed, the test voltage of K2 is multiplied with 1,35</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>test 26.2.3 – Test A, passed for wrapped layers</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>the finished component pass the electric strength test according to cl. 18.3</li> </ul>		N/A
a)	Insulated winding wire used for basic or supplementary insulation in a wound part:		N/A
	<ul style="list-style-type: none"> <li>comply with annex K</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>two layers for supplementary insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for basic insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation between the insulated wires of primary and secondary. This layer fulfils the requirement of basic insulation.</li> </ul>		N/A
b)	Insulated winding wire used for reinforced insulation in a wound part:		P
	<ul style="list-style-type: none"> <li>comply with annex K</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>three layers</li> </ul>		P
	<ul style="list-style-type: none"> <li>relevant dielectric strength test of 18.3</li> </ul>		P
	Where the insulated winding wire is wound:		N/A
	<ul style="list-style-type: none"> <li>upon metal or ferrite cores</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>upon enamelled wire</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>under enamelled wire</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation between the insulated wires and the core or the enamelled wires is required. This layer fulfils the requirement of basic insulation.</li> </ul>		P
	<ul style="list-style-type: none"> <li>both windings shall not touch each other and also not the core.</li> </ul>		P
	100 % routine test of Annex K3 of part 1 is fulfilled		N/A
	no creepage distances and clearances for insulated winding wirers		P
	for TIW wires values of box 2) c) of table 13, table C.1 and table D.1 of part 1 and of clause 26.106 are not required		P

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
<b>FIW</b>	<u>Transformers which use FIW wire</u>		N/A
BB 19.12.101 (A1)	Max. class F for transformers which use FIW-wire		N/A
BB 19.12.102 (A1)	FIW wires comply with IEC 60851-5, Ed.4.1; IEC 60317-0-7 and IEC 60317-56, Ed.1.		N/A
	<ul style="list-style-type: none"> <li>other nominal diameter as mentioned in table 19.101 can be calculated with the formula after table 19.111</li> </ul>		N/A
	FIW wire used for basic or supplementary insulation for transformers according 19.1.2 (separating-transformers) of IEC 61558-2-16:		N/A
	<ul style="list-style-type: none"> <li>the test voltage of table 8a – part 1, based on the working voltage of basic or supplementary insulation, comply with the min. voltage strength of table 19.111</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation is located between the insulated wires of primary and secondary. This layer fulfil the requirement of basic insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>between FIW and enamelled wire, no requirements of creepage distances and clearances</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>no touch of FIW and enamelled wires (grad 1, or grad 2 ...)</li> </ul>		N/A
	FIW wire used for double or reinforced insulation for transformers according 19.1.3 (isolating and safety isolating transformers) of IEC 61558-2-16 (PRI and SEC basic insulated FIW-wire):		N/A
	<ul style="list-style-type: none"> <li>the test voltage of table 8a – part 1, based on the working voltage of basic or supplementary insulation, comply with the min. voltage strength of table 19.111</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>for primary and secondary winding FIW-wire for basic insulation is used</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation is located between the insulated wires of primary and secondary. This layer fulfil the requirement of basic insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>no touch between the basic insulated PRI and SEC FIW-wires</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>between PRI- and SEC-FIW wires, no requirements of creepage distances and clearances</li> </ul>		N/A
	Alternative construction used for reinforced insulation (reinforced insulated FIW wire and enamelled wire)		N/A



<b>IEC 61558-2-16:2009+A1:2013</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> <li>the test voltage of table 8a – part 1, based on the working voltage reinforced insulation, comply with the min. voltage strength of table 19.111</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation is located between the reinforced insulated FIW wire and the enamelled wire. This layer fulfil the requirement of basic insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>no touch between the FIW wire and the enamelled wire</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>between the reinforced FIW wire and any other parts, no requirements of creepage distances and clearances exist</li> </ul>		N/A
	Alternative construction with FIW wires, basic or supplementary insulated for transformers with double or reinforced insulation according to 19.1.3 (basic/supplementary insulated FIW wire + enamelled wire + creepage distance and clearances for basic insulation)		N/A
	<ul style="list-style-type: none"> <li>the test voltage of table 8a – part 1, based on the working voltage of basic or supplementary insulation, comply with the min. voltage strength of table 19.111</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>PRI or SEC basic insulated FIW wire and to the other winding (enamelled wire) requirements of supplementary insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>creepage distances and clearances between the basic insulated FIW wire and the enamelled wire for basic or supplementary insulation are required.</li> </ul>		N/A
	Where the FIW wire is wound		N/A
	<ul style="list-style-type: none"> <li>upon metal or ferrite cores</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>one layer for mechanical separation between the insulated wires and the core or the enamelled wires is required. This layer fulfils the requirement of basic insulation.</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>both windings shall not touch each other and also not the core.</li> </ul>		N/A
<b>BB.20</b>	<b>COMPONENTS</b>		N/A
<b>BB.21</b>	<b>INTERNAL WIRING</b>		N/A
<b>BB.22</b>	<b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CABLES AND CORDS</b>		N/A

<b>IEC 61558-2-16:2009+A1:2013</b>			
Clause	Requirement - Test	Result - Remark	Verdict
<b>BB.23</b>	<b>TERMINALS FOR EXTERNAL CONDUCTORS</b>		N/A
<b>BB.24</b>	<b>PROVISION FOR PROTECTIVE EARTHING</b>		N/A
<b>BB.25</b>	<b>SCREWS AND CONNECTIONS</b>		N/A
<b>BB.26</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		P
BB.26.1	See 26.101		P
BB.26.2	Creepage distances (cr) and clearances (cr)		P
BB.26.2.1	Windings covered with adhesive tape		P
	– the values of pollution degree 1 are fulfilled		N/A
	– all isolating material are classified acc. to IEC 60085 and IEC 60216		N/A
	– test A of 26.2.3 is fulfilled		N/A
BB.26.2.2	Uncemented insulating parts pollution degree P2 or P3		P
	– all isolating material are classified acc. to IEC 60085 and IEC 60216		N/A
	– values of pollution degree 1 are not applicable		N/A
BB.26.2.3	Cemented insulating parts		N/A
	– all isolating materials are classified acc. to IEC 60085 and IEC 60216		N/A
	– values of distance through insulation (dti) are fulfilled		N/A
	– creepage distances and clearances are not required		N/A
	– test A of this sub clause is fulfilled		N/A
	Test A		N/A
	– thermal class		N/A
	– working voltage		N/A
	– Test with three specially specimens, with uninsulated wires, without impregnation or potting		N/A
	Two of the three specimens are subjected to:		N/A
	– the relevant humidity treatment according to 17.2 (48 h)		N/A
	– the relevant dielectric strength test of 18.3 multiplied with factor 1,35		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– One of the three specimens is subjected to the relevant dielectric strength test of 18.3 multiplied by the factor 1,35 immediately at the end of the last cycle with high temperature		N/A
	Impulse dielectric test according to 4.1.1.2.1 of IEC 60 664-1 (1,2 / 50 s waveform) – see Annex R of IEC 61558-1		N/A
BB.26.2.4	Enclosed parts, by impregnation or potting		N/A
BB.26.2.4.1	– The requirements of reduced values as stated for pollution degree 1 (P1) are fulfilled		N/A
	– all isolating materials are classified acc. to IEC 60085 and IEC 60216		N/A
	Test B		N/A
	– thermal class		N/A
	– working voltage		N/A
	– Test with three specially specimens, potted or impregnated. The dielectric strength test is applied directly to the joint.		N/A
	Two of the three specimens are subjected to:		N/A
	– the relevant humidity treatment according to 17.2 (48 h)		N/A
	– the relevant dielectric strength test of 18.3 multiplied with factor 1,25		N/A
	– One of the three specimens is subjected to the relevant dielectric strength test of 18.3 multiplied by the factor 1,25 immediately at the end of the last cycle with high temperature		N/A
	The three spacemen pass the Impulse dielectric test according to 4.1.1.2.1 of IEC 60 664-1 (1,2 / 50 s waveform) – see Annex R of IEC 61558-1		N/A
BB.26.2.4.2	– The requirements of distance through insulation (dti) are fulfilled. (P1 values are not required)		N/A
	– all isolating materials are classified acc. to IEC 60085 and IEC 60216		N/A
	Test C		N/A
	– thermal class		N/A
	– working voltage		N/A
	– Test with three specimens, potted or impregnated. (finished components)		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– Neither cracks, nor voids in the insulating compounds		N/A
	Two of the three specimens are subjected to:		N/A
	– the relevant humidity treatment according to 17.2 (48 h)		N/A
	– the relevant dielectric strength test of 18.3 multiplied with factor 1,35		N/A
	– One of the three specimens is subjected to the relevant dielectric strength test of 18.3 multiplied by the factor 1,35 immediately at the end of the last cycle with high temperature		N/A
	The three spacemen pass the Impulse dielectric test according to 4.1.1.2.1 of IEC 60 664-1 (1,2 / 50 s waveform) – see Annex R of IEC 61558-1		N/A
BB.26.3	Distance through insulation		P
	For double or reinforced insulation, the required values of Tables 13, C1, and D1 – boxes 2b, 2c and 7 are fulfilled		P
	The insulation fulfil the material classification according IEC 60085 or 60216 or the test of 14.3		P
BB.26.3.1	Reduced values of the thickness of insulation for supplementary or reinforced insulation are allowed if the following conditions are fulfilled:		N/A
	– the isolating materials are classified acc. to IEC 60085 and IEC 60216		N/A
	– the test of 14.3 is fulfilled		N/A
	– If both requirements are fulfilled, the required values for solid insulation can be multiplied by 0,4		N/A
	– Minimum thickness of reinforced insulation $\geq 0,2$ mm		N/A
	– Minimum thickness of supplementary insulation $\geq 0,1$ mm		N/A
BB.26.3.2	Insulation in thin sheet form		P
	– If the layers are non-separable (glued together):		N/A
	– The requirement of 3 layers is fulfilled		N/A
	– The mandrel test according 26.3.3 is fulfilled with 150 N		N/A
	– The required values for d.t.i. of Tables 13, C.1 and D.1 – marked by index "e" is fulfilled.		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– If the layers are separated:		N/A
	– The requirement of 2 layers is fulfilled		N/A
	– If serrated tape is used, 1 additional layer (serrated) and one additional layer without serration is required		N/A
	– The mandrel test according 26.3.3 is fulfilled on each layer with 50 N		N/A
	– The required values for d.t.i. of Tables 13, C.1 and D.1 – marked by index "e" is fulfilled.		N/A
	– If the layers are separated (alternative:		P
	- The requirement of 3 layers is fulfilled		P
	– If serrated tape is used, 1 additional layer (serrated) and one additional layer without serration is required		N/A
	– The mandrel test according 26.3.3 is fulfilled on 2/3 of the layers with 100 N		P
	– The required values for d.t.i. of Tables 13, C.1 and D.1 – marked by index "e" is fulfilled.		P
	Test according to 14.3 and if the isolating materials are classified acc. to IEC 60085 and IEC 60216 no distances through insulation are required for insulation in thin sheet form		N/A
	The figures within square brackets in box 2 and 7 of table 13 (C.1/D.1) are used for insulation in thin sheet form as follows:		N/A
	– rated output > 100 VA values in square brackets apply		N/A
	– rated output 25 VA 100 VA 2/3 of the value in square brackets apply		N/A
	– rated output _ 25 VA 1/3 of the value in square brackets apply		N/A
BB.26.3.3	Mandrel test of insulation in thin sheet form (specimen of 70 mm width are necessary):		P
	– If the layers are non-separable – at least 3 layers glued together fulfil the test:		N/A
	– pull force of 150 N		N/A
	– high voltage test of 5,0 kV or the test voltage of 18.3 multiplied by 1,25 whatever is the greater. No flashover, no breakdown.		N/A
	– If the layers are separable and 2/3 of at least 3 layers fulfil the test.		P

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– pull force of 100 N		P
	– high voltage test of 5,0 kV or the test voltage of 18.3 multiplied by 1,25 whatever is the greater. No flashover, no breakdowns.		P
	– If the layers are separable 1 of at least 2 layers fulfil the test:		N/A
	– pull force of 50 N		N/A
	– high voltage test of 5,0 kV or the test voltage of 18.3 multiplied by 1,25 whatever is the greater. No flashover, no breakdown.		N/A
BB.26.101	Creepage distances, clearances and distances through insulation, specified values according to (EN 61558-2-16:09):		P
	– table 13, material group IIIa (part 1)		P
	– table C, material group II (part 1)		N/A
	– table D, material group I (part 1)		N/A
	– working voltage		P
	– rated supply frequency 50/60 Hz		N/A
	– rated internal frequency		P
	1. Insulation between input and output circuits (basic insulation):		N/A
	a) measured values $\geq$ specified values (mm) .....		N/A
	2. Insulation between input and output circuits (double or reinforced insulation):		P
	a) measured values $\geq$ specified values (mm) .....	Cl=Cr=6,6 mm Limit: (cl., cr.) = (5, 5 mm, 6, 0 mm)	P
	b) measured values $\geq$ specified values (mm) .....		N/A
	c) measured values $\geq$ specified values (mm) .....		N/A
	3. Insulation between adjacent input circuits: measured values $\geq$ specified values (mm) .....		N/A
	Insulation between adjacent output circuits: measured values $\geq$ specified values (mm) .....		N/A
	4. Insulation between terminals for external connection:		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	a) measured values $\geq$ specified values (mm) .....		N/A
	b) measured values $\geq$ specified values (mm) .....		N/A
	c) measured values $\geq$ specified values (mm) .....		N/A
	5. Basic or supplementary insulation:		N/A
	a) measured values $\geq$ specified values (mm) .....		N/A
	b) measured values $\geq$ specified values (mm) .....		N/A
	c) measured values $\geq$ specified values (mm) .....		N/A
	d) measured values $\geq$ specified values (mm) .....		N/A
	e) measured values $\geq$ specified values (mm) .....		N/A
	6. Reinforced or double insulation: measured values $\geq$ specified values (mm) .....		N/A
	7. Distance through insulation:		P
	a) measured values $\geq$ specified values (mm) .....		N/A
	b) measured values $\geq$ specified values (mm) .....		N/A
	c) measured values $\geq$ specified values (mm) .....	0,3mm, thin sheet	P
BB.26.102	Values of IEC 61558-2-16 applicable for frequency up to 3 MHz (EN 61558-2-16:09)		P
	For frequency above 3 MHz clause 7 of IEC 60664-4 is applicable (high frequency testing)		N/A
BB.26.103	Clearance (EN 61558-2-16:09)		P
	a.) Clearance for frequency $\geq$ 30 kHz according figure 101 two determinations are necessary:		P
	– determination based on peak working voltage according Table 104 :		P
	Peak working voltage		P
	Basic insulation: required / measured		P
	Double or reinforced insulation: required / measured value		P

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	– and alternative if applicable for approximately homogeneous field according to Table 102		P
	Peak working voltage		P
	Basic insulation: required / measured		P
	Double or reinforced insulation: required / measured value		P
	– determination based on measured r.m.s. working voltage according Tables 13, C1 and D1 (see clause 26.101)		P
	The minimum clearance is the greater of the two values.		P
	b.) Clearance for frequency $\leq 30$ kHz according figure 101 two determinations are necessary:		N/A
	– determination based on peak working voltage with recurring peak voltages according Table 103 :		N/A
	– determination based on measured r.m.s. working voltage according Tables 13, C1 and D1 (see clause 26.101)		N/A
	The minimum clearance is the greater of the two values.		N/A
BB.26.104	The working voltages of Table 102, 103 and 104 are peak voltages including $\mu$ sec peaks EN 61558-2-16:09)		P
	The working voltage according to Table 13 of part 1 are r.m.s. voltages		P
BB.26.105	Creepage distances		P
	Two determinations of creepage distances are necessary (see Figure 102)		P
	– determination based on measured peak working voltage according Tables 105 to 110		P
	Peak working voltage		P
	Pollution degree		P
	Basic or supplementary insulation: required / measured		N/A
	Double or reinforced insulation: required / measured value		P
	– determination based on measured r.m.s. working voltage according Tables 13, C1 and D1 (see clause 26.101)		P



IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	If the values based on table 105 to 110 are lower than the relevant values in Tables 13, C.1 or D.1, the higher values shall be applicable		P
BB.26.106	Distance through insulation (EN 61558-2-16:09)		P
	Instead of partial discharge with high frequency voltage the test of the distance and the calculation of the electric field is applicable under the following conditions:		P
	– the max. frequency is < 10 MHz		P
	– the field strength approximately comply with Figure 103		P
	– no voids or gaps are present in between the solid insulation		P
	For thick layers $d1 \geq 0,75$ the peak value of the field strength is $\leq 2$ kV/mm		P
	For thin layers $d2 \leq 30 \mu\text{m}$ the peak value of the field strength is $\leq 10$ kV/mm		P
	For $d1 > d > d2$ equation (1) is used for calculation the field strength		P
BB.26.107 (A1)	For transformers with FIW wires the following test is required		N/A
	<ul style="list-style-type: none"> <li>10 cycles are required</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>68 h test at max heating temperature + 10°C or test at max. allowed winding temperature based on the insulation class (required in table 1) + 10°C</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>1 h at 25° C</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>2 h at 0° C</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>1 h at 25° C – (next cycle start again with 68 h max winding temp + 10)</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>during the 10 cycles test 2 x working voltage is connected between PRI and SEC</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>after 10 cycle test 2 transformers are subjected to the 17.2 test for 48 h and direct after the 48 h the dielectric strength test of 18.3 (100 % test voltage) is done</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>after the 10 cycle test the third sample is tested at the end of the last cycle in the hot position with the dielectric strength test of 18.3 (100 % test voltage)</li> </ul>		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> <li>the partial discharge test according to 18.101 is done after the cycling test and after the high voltage test, if the <b>peak</b> working voltage is &gt;750 V</li> </ul>		N/A

BB.27	RESISTANCE TO HEAT, FIRE AND TRACKING		N/A
IEC 61558-2-16 Annex BB			
Clause	Requirement + Test	Result - Remark	Verdict

BB.E	ANNEX E , GLOW WIRE TEST		P
	The test is required according to IEC 60695-2-10 and IEC 60695-2-11 with the following additions:		P
BB.E.1	Clause 6, "Severities" of IEC 6095-2-11, apply with the temperature stated in 27.3 of IEC 61558-1		P
BB.E2	Clause 8, "Conditioning", of IEC 60695-2-11 apply, preconditioning is required		P
BB.E3	Clause 10, "Test Procedure", of IEC 60695-2-11 apply, The tip of the glow wire is applied to the flat side of the surface.		P

BB.F	ANNEX F, REQUIREMENTS FOR MANUALLY OPERATED SWITCHES WHICH ARE PARTS OF THE TRANSFORMER		N/A
------	---	--	-----

BB.H	ANNEX H, ELECTRONIC CIRCUITS (IEC 61558-1)		N/A
------	--	--	-----

BB.K 61558-2-16/A1	ANNEX K, INSULATED WINDING WIRES FOR USE AS MULTIPLE LAYER INSULATION		N/A
BB.K.1	Wire construction:		N/A
	<ul style="list-style-type: none"> <li>insulated winding wire for basic or supplementary insulation (see 19.12.3)</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>insulated winding wire for reinforced insulation (see 19.12.3)</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>solid circular winding wires and stranded winding wires with 0,05 to 5 mm diameter</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>spirally wrapped insulation - overlapping</li> </ul>		N/A
BB.K.2	Type tests		N/A
BB.K.2.1	General Tests between ambient temperature between 15° C and 35° C and at an humidity between 45% and 75 %		N/A

IEC 61558-2-16:2009+A1:2013			
Clause	Requirement - Test	Result - Remark	Verdict
BB K.2.2	Electric strength test		N/A
BB K.2.2.1	Solid circular winding wires and stranded winding wires		N/A
	Test samples prepared according to clause 4.4.1 of IEC 60851-5:2008 (twisted pair)		N/A
	Dielectric strength test: 6 kV for reinforced insulation		N/A
	Dielectric strength test: 3 kV for basic or supplementary insulation		N/A
BB K.2.2.2	Square or rectangular wires .		N/A
	Test samples prepared according to clause 4.7.1 of IEC 60851-5:2008		N/A
	Dielectric strength test: 5,5 kV for reinforced insulation		N/A
	Dielectric strength test: 2,75 kV for basic or supplementary insulation		N/A
BB K.2.3	Flexibility and adherence		N/A
	Claus 5.1 in Test 8 of IEC 60851-3:2009 shall be used		N/A
	Test samples prepared according to clause 5.1.1.4 of IEC 60851-3:2009		N/A
	Dielectric strength test: 5,5 kV for reinforced insulation		N/A
	Dielectric strength test: 2,75 kV for basic or supplementary insulation		N/A
	Mandrel diameter according table K.1		N/A
	The tension to the wire during winding on mandrel is 118 N/mm <sup>2</sup> (118 MPa)		N/A
BB.K.2.4	Heat shock		N/A
	Test samples prepared according to 3.1.1 (in Test 9) of IEC 60851-6:1996		N/A
	<ul style="list-style-type: none"> <li>high voltage test immediately after this test</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 5,5 kV for reinforced insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 2,75 kV for basic or supplementary insulation</li> </ul>		N/A
BB.K.2.5	Retention of dielectric strength after bending ( test as specified under test 13 of 4.6.1 c) of IEC 60 851-5)		N/A

<b>IEC 61558-2-16:2009+A1:2013</b>			
Clause	Requirement - Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> <li>high voltage test immediately after this test</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 5,5 kV for reinforced insulation</li> </ul>		
	<ul style="list-style-type: none"> <li>Dielectric strength test: 2,75 kV for basic or supplementary insulation</li> </ul>		
BB.K.3	Testing during manufacturing		N/A
BB.K.3.1	General Tests as subjected in K.3.2 and K.3.3		N/A
BB K.3.2	Routine test		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 4,2 kV for reinforced insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 2,1 kV for basic or supplementary insulation</li> </ul>		N/A
BB K.3.3	Sampling test		N/A
BB K.3.3.1	Solid circular winding wires and stranded winding wires		N/A
	Test with a twisted pair, prepared according clause 4.4.1 of IEC 60851-5:2008		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 6 kV for reinforced insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 3 kV for basic or supplementary insulation</li> </ul>		N/A
BB K.3.3.2	Square rectangular wire		N/A
	Samples prepared according to clause 4.7.1 of IEC 60851-5:2008		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 5,5 kV for reinforced insulation</li> </ul>		N/A
	<ul style="list-style-type: none"> <li>Dielectric strength test: 3 kV for basic or supplementary insulation</li> </ul>		N/A
<b>BB.U</b>	<b>ANNEX U – INFORMATIVE – OPTIONAL TW – MARKING FOR TRANSFORMERS</b>		N/A
<b>V</b>	<b>ANNEX V, SYMBOLS TO BE USED FOR THERMAL CUT-OUTS</b>		N/A

---End of attachment 4---